
BOARD CHARACTERISTICS			
1.6062 mm	Board thickness:	4	Copper layer count:
		68.5800 mm x 53.3400 mm	Board overall dimensions:
0.2000 mm	Min hole diameter:	0.1500 mm / 0.1500 mm	Min track/spacing:
No	Impedance control:	ENIG	Copper finish:
No	Press-fit pads:	No	Castellated pads:
No	Edge card connectors:	No	Plated board edge:

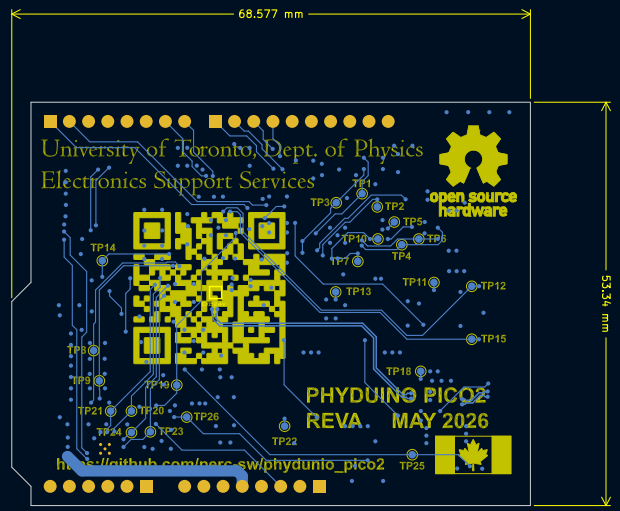

Loss Tangent	Epsilon R	Color	Thickness	Material	Type	Layer Name
0	1	White	Not specified	Not specified	Top silk screen	F.Silkscreen
0	1		Not specified		Top solder paste	F.Paste
0	3.3	Blue	0.01 mm	Not specified	Top solder mask	F.Mask
0	1		0.035 mm		Copper	F.Cu
0.02	4.29	FR4 natural	0.2104 mm	FR4	Prepreg	Dielectric 1
0	1		0.0152 mm		Copper	In1.Cu
0.02	4.29	FR4 natural	1.065 mm	FR4	Core	Dielectric 2
0	1		0.0152 mm		Copper	In2.Cu
0.02	4.29	FR4 natural	0.2104 mm	FR4	Prepreg	Dielectric 3
0	1		0.035 mm		Copper	B.Cu
0	3.3	Blue	0.01 mm	Not specified	Bottom solder mask	B.Mask
0	1		Not specified		Bottom solder paste	B.Paste
0	1	White	Not specified	Not specified	Bottom silk screen	B.Silkscreen

University of Toronto, Dept of Physics

Sheet:

File: phyduino_pico2.kicad_pcb

Title: Phyduino Pico 2

Size: A4	Date: 2026-05-04	Rev: A
KiCad E.D.A. 10.0.1		Id: 1/1