

HY - ILUMINACIÓN LED EXTERIOR ALTA POTENCIA

Potencia: 100W, 240W, 360W y 500W Reemplaza hasta 5000W



HY-LED EXTERIOR

Hasta **150** LM/W www.ledigcolombia.com





SOLUCIONES DE ILUMINACIÓN LEDIGCO SAS

Better solutions for Led Hybrid Light



IP66 water-proof



AC100-277V 50/60Hz



Easy Installation



150Lm/w

Operating Temp.: -40°C ~+50°C

Storage Temp.: -40°C ~+80°C

Options -

Power

Color 3000K 4000K 5700K

Beam Angle 30°

15° 100×60°



Application

Tunnel light, Sports field, Parking lot, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.

Specifications

Item	Power	Luminous Efficac	y Leds	CRI	Weight	Beam Angle
BR-HY100W-01-G2	100W	150lm/W@30°/100×60° 120lm/W@15°	LUMILEDS 5050	>70	4.8kg(10.6lbs)	30°/15°/100×60°
BR-HY240W-01-G2	240W	150lm/W@30°/100×60° 120lm/W@15°	LUMILEDS 5050	>70	7.1kg(15.7lbs)	30°/15°/100×60°
BR-HY360W-01-G2	360W	150lm/W@30°/100×60° 120lm/W@15°	LUMILEDS 5050	>70	9.5kg(21.0lbs)	30°/15°/100×60°
BR-HY500W-01-G2	500W	150lm/W@30°/100×60° 120lm/W@15°	LUMILEDS 5050	>70	13.0kg(28.7lbs)	30°/15°/100×60°

CERTIFICACIONES / LISTADOS



















HY-01-G2 100W / 240W 360W / 500W IKO8 IP66 HY100W-01(ID-G2-P1) HY240W-01(ID-G2-P1) HY360W-01(ID-G2-P1) HY500W-01(ID-G2-P1) HY500W-01(ID-G2-P1)




Carrera 15 No. 19-60 Interior C-07 Chía, Cundinamarca. Colombia Tel: + 57 3203007000 E- mail: ventas@ledigcolombia.com

www.ledigcolombia.com

SOLUCIONES DE ILUMINACIÓN **LEDIGCO SAS**

ESPECIFICACIONES TÉCNICAS

FOTOMETRÍA

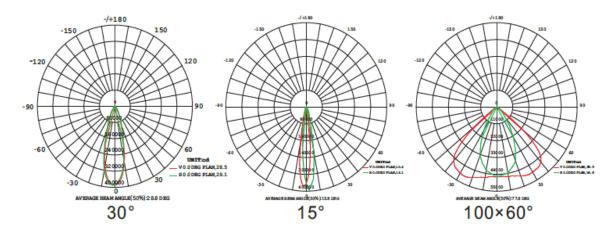

LED Brand: CREE \$\(\phi\)
Driver Brand: \(\frac{\pmu \cdot \



Target Angle Adjustable Individual Module to Suit for Various Applications.







Carrera 15 No. 19-60 Interior C-07 Chía, Cundinamarca. Colombia Tel: + 57 3203007000 E- mail: ventas@ledigcolombia.com

www.ledigcolombia.com