
EN

Professionally approved products.

Datasheet

Omni-Directional PCB Mount 9.7mm Condenser Microphone Element


RS Stock number 724-3134



Specification:

Directivity	Omni directional
Standard operating voltage	1.5V
Maximum operating voltage	10V
Maximum current consumption	0.5mA
Output impedance (F=1KHz 1Pa)	‹ 2.2KΩ
Frequency	50~16000Hz
Sensitivity (@F=1KHz, 0dB=1V/Pa)	-41±3dB
Sensitivity reduction (@1.5V–3.0V)	-3dB
Signal to noise ratio (F=1KHz 1Pa) A weighted	›60dB
Electrets type	Foil type
Material	Al
Storage temperature	-20ºC~+60ºC
Operating temperature	-20ºC~+60ºC


Typical Frequency Response Curve

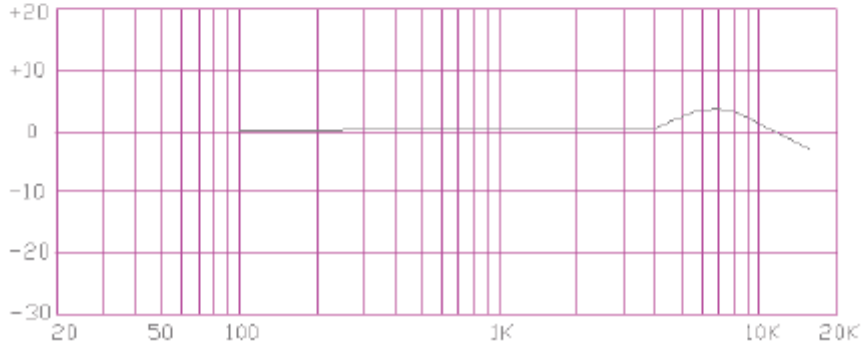

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

Professionally approved products.

Dimensions:

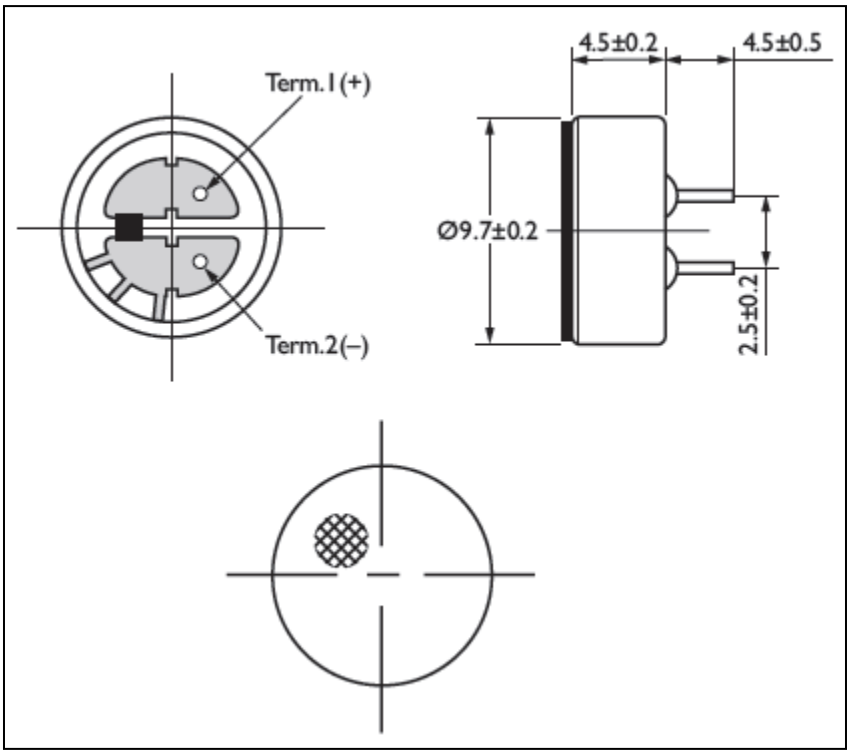

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.