
seeed studio

INDUSTRIAL PRODUCT DATASHEET


Feetech FE-URT-1 USB to TTL, 485 bus programmer

The Feetech FE-URT-1 USB to TTL, 485 bus programmer delivers versatile UART-level switching, servo system interface, and high-speed USB communication with built-in overcurrent protection and wide OS compatibility.

SKU	UPDATED	PRICE
100036057	2026-06-10 12:11:00	$10.00(Excl. VAT)

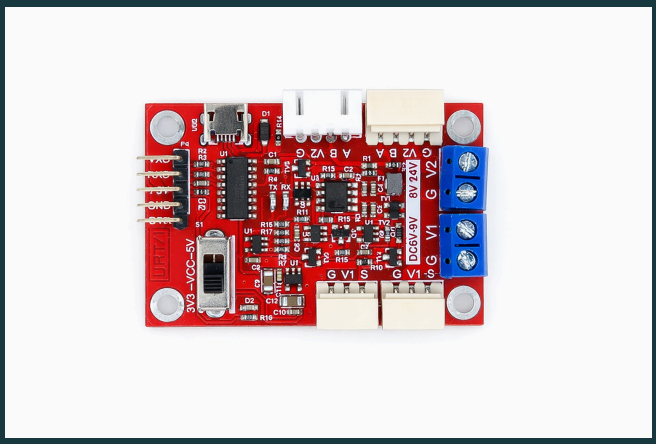

Overview

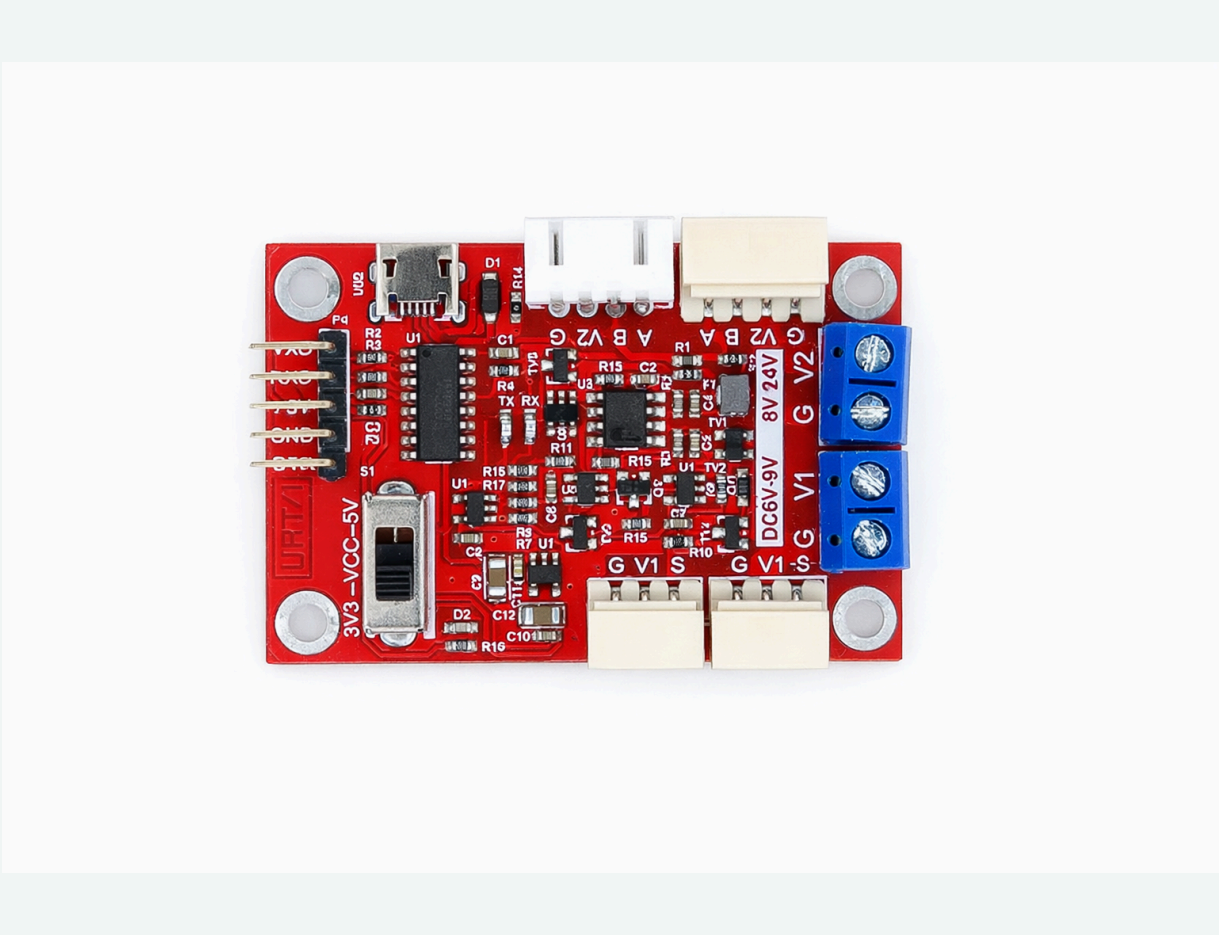

The Feetech FE-URT-1 USB to TTL, 485 bus programmer features a full-speed USB device interface with baud rates from 50bps to 1Mbps, switchable 5V/3.3V UART levels, and Microsoft digital signature certification for secure Windows operation. It provides error-proof servo control for SMS/SCS series servos, general-purpose USB-to-serial conversion, and robust protection including 500mA overcurrent and overvoltage safeguards.

Key Features

- Full-speed USB device interface compatible with USB V2.0
- Supports baud rates from 50bps to 1Mbps
- Switchable 5V and 3.3V UART serial port signal levels
- Compatible with 32/64-bit Windows operating systems including Windows 10, 8.1, 8, 7, Vista, XP, and various server editions
- Microsoft digital signature certification for secure operation
- Allows for control of SMS and SCS series servos through a single serial port
- Asynchronous half-duplex communication mode with hardware automatic diversion, reducing the need for additional IO control
- Error-proof connection interface for servo systems to ensure proper connections
- General-purpose UART interface that can be used for USB-to-serial output or to connect MCU UART for controlling servos
- Equipped with signal level power indicator (D1), TX (D2), and RX (D3) indicators for easy data status monitoring
- 5V voltage supplied from USB; external 5V supply can also be used
- 500mA overcurrent protection and overvoltage protection for the USB power supply


Product Gallery




Specification


Product	Feetech HL-3615-C002 6V 2.5Kg Servo
Weight	12.5 g
Dimensions	55.8 * 36.6 * 11.5 mm
Mounting size	48.8 * 28.8 mm
USB interface	Mini USB
UART interface	2.54 pin spacing
SCS servo interface	3PIN 5264-3AW
SMS servo interface	4PIN 5264-4AW
Actuator power interface	5.08 terminal

Hardware Overview

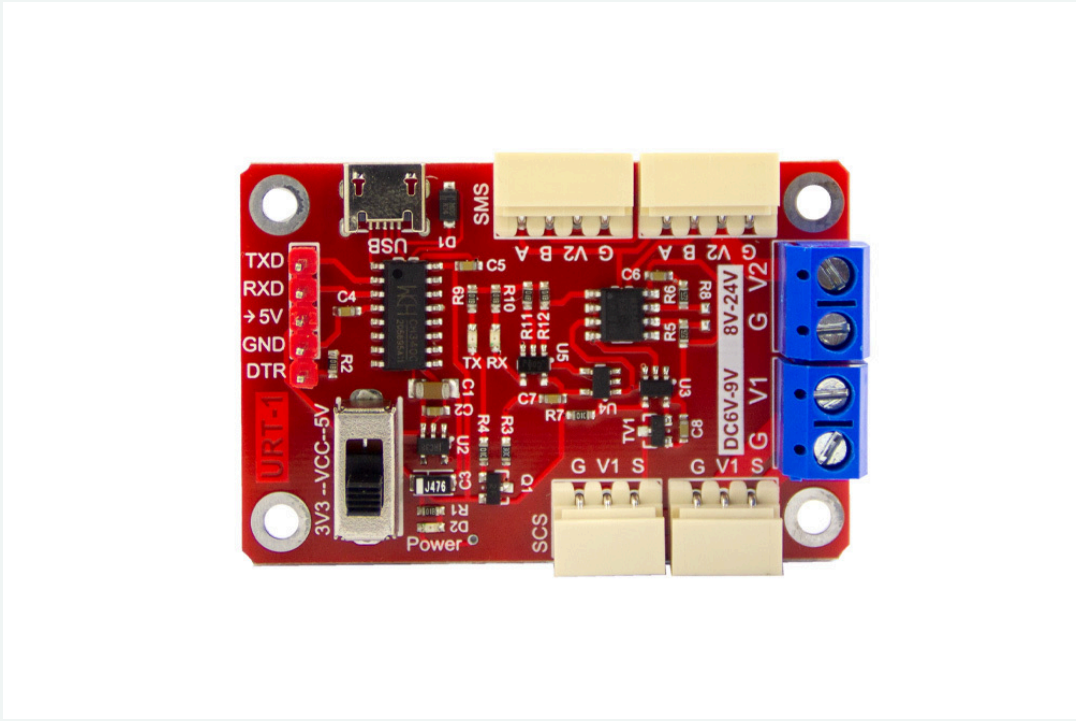

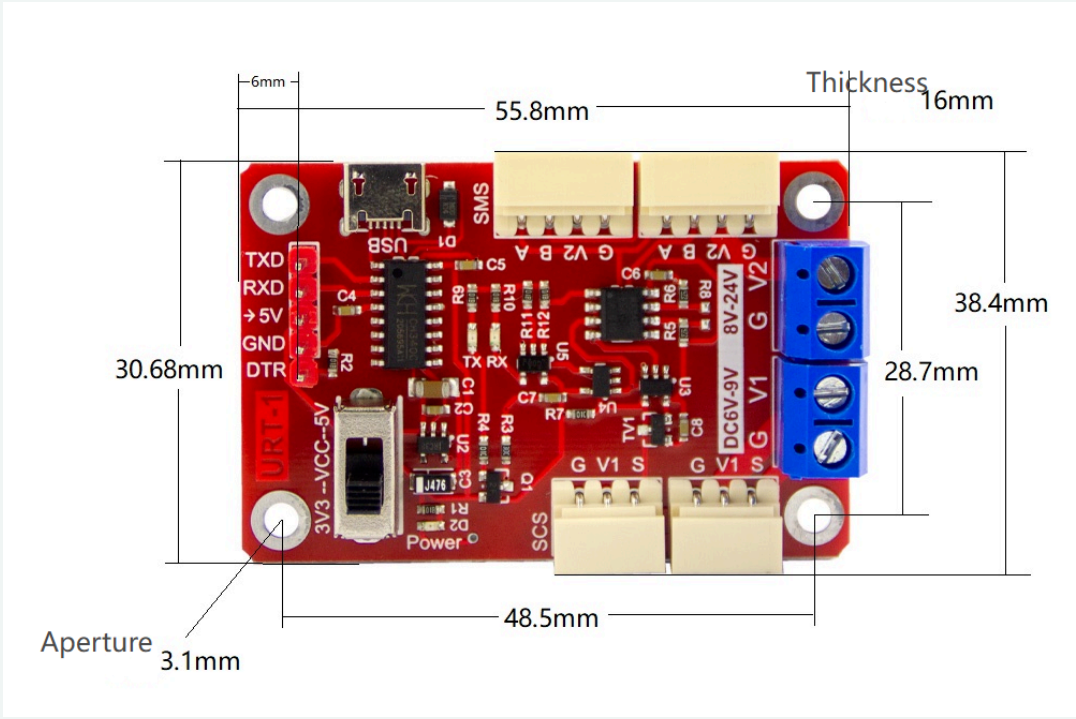


6mm
55.8mm
Thickness
16mm
38.4mm
30.68mm
28.7mm
48.5mm
Aperture
3.1mm
SMS
SCS
USB
TXD
RXD
→5V
GND
DTR
URT-1
3V3 --VCC--5V
Power
8V-24V
DC6V-9V
A B V2 G
G V1 S

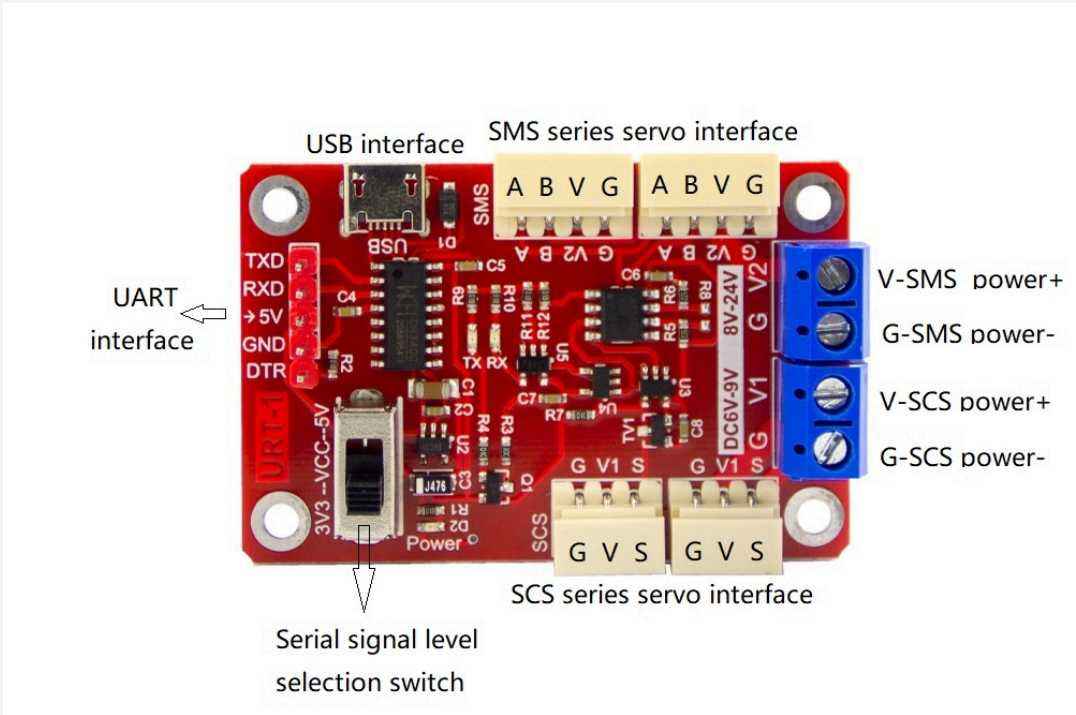
USB interface
SMS series servo interface
A B V G
A B V G
UART
interface
V-SMS power+
G-SMS power-
V-SCS power+
G-SCS power-
G V S
G V S
SCS series servo interface
Serial signal level
selection switch
TXD
RXD
→5V
GND
DTR
URT-1
3V3 --VCC--5V
Power
SMS
SCS
8V-24V
DC6V-9V

Part List

FE-URT-1 USB to TTL, 485 bus programmer	x1

Compliance & Logistics

HSCODE	8503001000
USHSCODE	8501106080
UPC	
EUHSCODE	8471707000
COO	CHINA

Resource Links

- https://www.seeedstudio.com/Feetech-FE-URT-1-p-6705.html
- Datasheet

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com