




FF Getränkeautomat – Front Panel PCB (0.96" I2C OLED + 3x 6mm Tactile Buttons)
Raspberry Pi 40-Pin Header Wiring (J1 JST-XH 7P or J2 Dupont 7P):
  Pin 1 (+3V3)   -> RPi Physical Pin 1 (3.3V Power)
  Pin 2 (I2C_SDA)   -> RPi Physical Pin 3 (GPIO 2 / SDA1)
  Pin 3 (I2C_SCL)   -> RPi Physical Pin 5 (GPIO 3 / SCL1)
  Pin 4 (GND)   -> RPi Physical Pin 9 (or Pin 14 / 20 GND)
  Pin 5 (BTN1_BACK) -> RPi Physical Pin 11 (GPIO 17 – Zurück / Abbruch)
  Pin 6 (BTN2_OK)   -> RPi Physical Pin 13 (GPIO 27 – Auswahl / OK)
  Pin 7 (BTN3_NEXT) -> RPi Physical Pin 15 (GPIO 22 – Weiter)
OLED Header J3 Pin Order: 1=VCC (+3V3), 2=GND, 3=SCL, 4=SDA

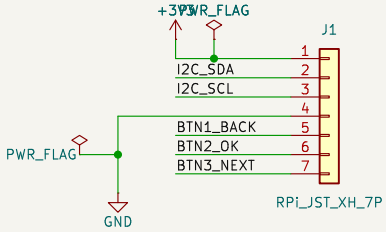

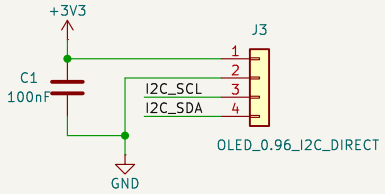

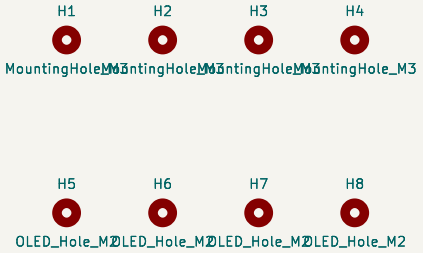



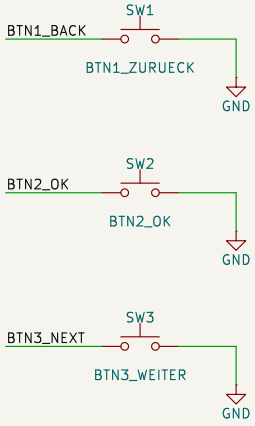

Dual Connector: 7-pin JST-XH (J1) + 7-pin 2.54mm Dupont Header (J2)
0.96 inch I2C OLED (VCC-GND-SCL-SDA) + 3x 6x6mm THT Navigation Buttons
Freiwillige Feuerwehr

Sheet: /
File: ff_front_panel.kicad_sch

Title: FF Getränkeautomat – OLED & 3-Button Front Panel PCB

Size: A4	Date: 2026-10-28	**Rev: 1.0**
KiCad E.D.A. 9.0.7		Id: 1/1