


Tump Farm Spring Recharge - Pre-Visit Desk Study

Prepared for discussion before the site visit. Generated 15 August 2026.

This note uses LiDAR-derived surface mapping and a simple water-balance scenario to show where there may be an opportunity to hold more rainfall and runoff on the land. The figures below describe opportunity, not a guaranteed increase in spring flow.

LiDAR contours and modelled surface-flow concentration

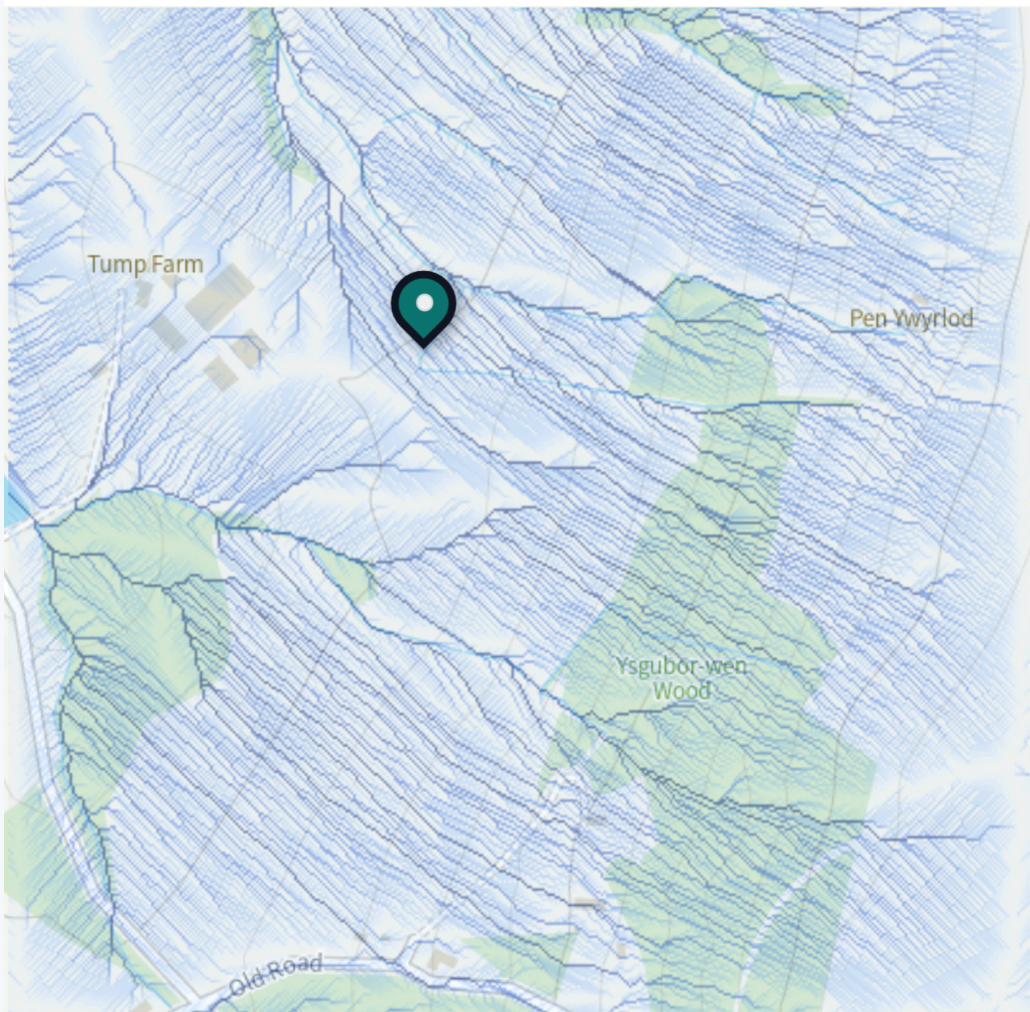

Blue lines show modelled surface-flow concentration from public LiDAR terrain data. They are useful field-check targets: places to look for wet flushes, compacted flow lines, drains, or evidence that the model is missing something.

Worked Opportunity Scenario

RAINFALL USED
900 mm/year

RECHARGE STRIP
1 ha

UPSLOPE AREA
3 ha

OPPORTUNITY
7.57 ML/year

The scenario asks: if one hectare of strategically placed broadleaf shelterbelt or recharge strip intercepted runoff from three hectares of compacted upslope pasture, how much extra water might be retained or infiltrated on site?

Using 900 mm annual rainfall, the arithmetic gives an indicative opportunity of **7.57 million litres per year** compared with the same hectare remaining as compacted pasture. This should be treated as a scoping number for discussion, not as a measured aquifer recharge or spring-yield prediction.

WATER MOVEMENT	PASTURE BASELINE	RECHARGE STRIP SCENARIO	OPPORTUNITY SHOWN
Rain falling directly on 1 ha	9.00 ML/year	9.00 ML/year	Same rainfall input
Upslope runoff captured from 3 ha	0 ML/year	5.67 ML/year	Water that might otherwise leave quickly as surface runoff
Runoff from the 1 ha feature itself	-2.70 ML/year	-0.18 ML/year	2.52 ML/year retained on the feature area
Vegetation water use and interception	-4.50 ML/year grass evapotranspiration assumption	-5.12 ML/year broadleaf interception/transpiration assumption	-0.62 ML/year additional tree water cost
Net retained / infiltrated opportunity	1.80 ML/year	9.37 ML/year	+7.57 ML/year

Assumptions

ASSUMPTION	VALUE USED	WHY IT IS REASONABLE FOR A FIRST PASS
Annual rainfall	900 mm/year	Simple conservative round number. Met Office Usk long-term average is about 995 mm/year for 1981-2010.
Pasture runoff	30% of rainfall	Scenario value representing compacted pasture and rapid surface runoff. Needs field observation/infiltration testing.
Runoff after tree/recharge feature	2% of rainfall on the feature	Optimistic scenario inspired by Pontbren evidence that tree shelterbelts can greatly increase infiltration and reduce runoff.
Upslope capture efficiency	70% of runoff from 3 ha	Design-target scenario for a well-placed contour feature. Actual performance depends on layout, soil, slope and maintenance.
Broadleaf tree water cost	5.12 ML/year over 1 ha	Combines 18% rainfall interception and 350 mm/year transpiration. Forestry Research gives broadleaf interception and transpiration ranges consistent with this order of magnitude.

Evidence Base

- **Local rainfall:** Met Office long-term averages for Usk give annual rainfall around 995 mm for 1981-2010. This note uses 900 mm to keep the worked example simple and slightly conservative.
- **LiDAR terrain:** the map uses DataMapWales public LiDAR DTM data to show surface contours and modelled surface-flow concentration.
- **Welsh shelterbelt evidence:** Pontbren research found much higher infiltration under tree shelterbelts than adjacent grazed pasture, with later summaries reporting infiltration around 60-67 times faster and runoff volumes reduced by about 78% under trees compared with grassland.
- **Tree water use:** Forestry Research summarises that broadleaves generally intercept around 10-25% of annual rainfall and transpire roughly 300-390 mm/year.

Interpretation

The important conclusion is not that a particular intervention will add exactly 7.57 ML/year to the spring. The useful conclusion is that the land may contain a sizeable water-retention opportunity if surface runoff can be slowed and encouraged to infiltrate in the right places.

The LiDAR map also shows why a site visit matters. Surface-flow lines can help choose where to walk and what to inspect, but spring flow may be controlled by deeper geology, fractures, perched groundwater, drains, or old land management features.

Limitations

This is a pre-visit desk study. It is suitable for scoping, discussion and planning field observations. It is not a hydrogeological assessment and should not be used as a guaranteed prediction of spring yield.

- The blue flow paths are modelled from ground surface shape, not measured groundwater movement.
- The spring's real recharge area may extend outside the visible surface catchment.
- The calculation is sensitive to runoff percentage, capture efficiency and soil infiltration.
- Field observations should check whether mapped flow lines match wet ground, drains or erosion evidence.

Source Links

- Met Office: Usk location-specific long-term averages
- DataMapWales: LiDAR Data Download
- Carroll et al. 2004: Can tree shelterbelts on agricultural land reduce flood risk?
- Pontbren summary: tree planting and reduced runoff
- The Pontbren Project report
- Forest Research: forestry and water resources
- Forestry Commission Information Note: Water Use by Trees

Spring coordinate used for mapping: 51.664158, -2.855463. Static map screenshot prepared from the JobDone Tumptonics Water Walk map.