



Quadrature Sampling Detector/Exciter

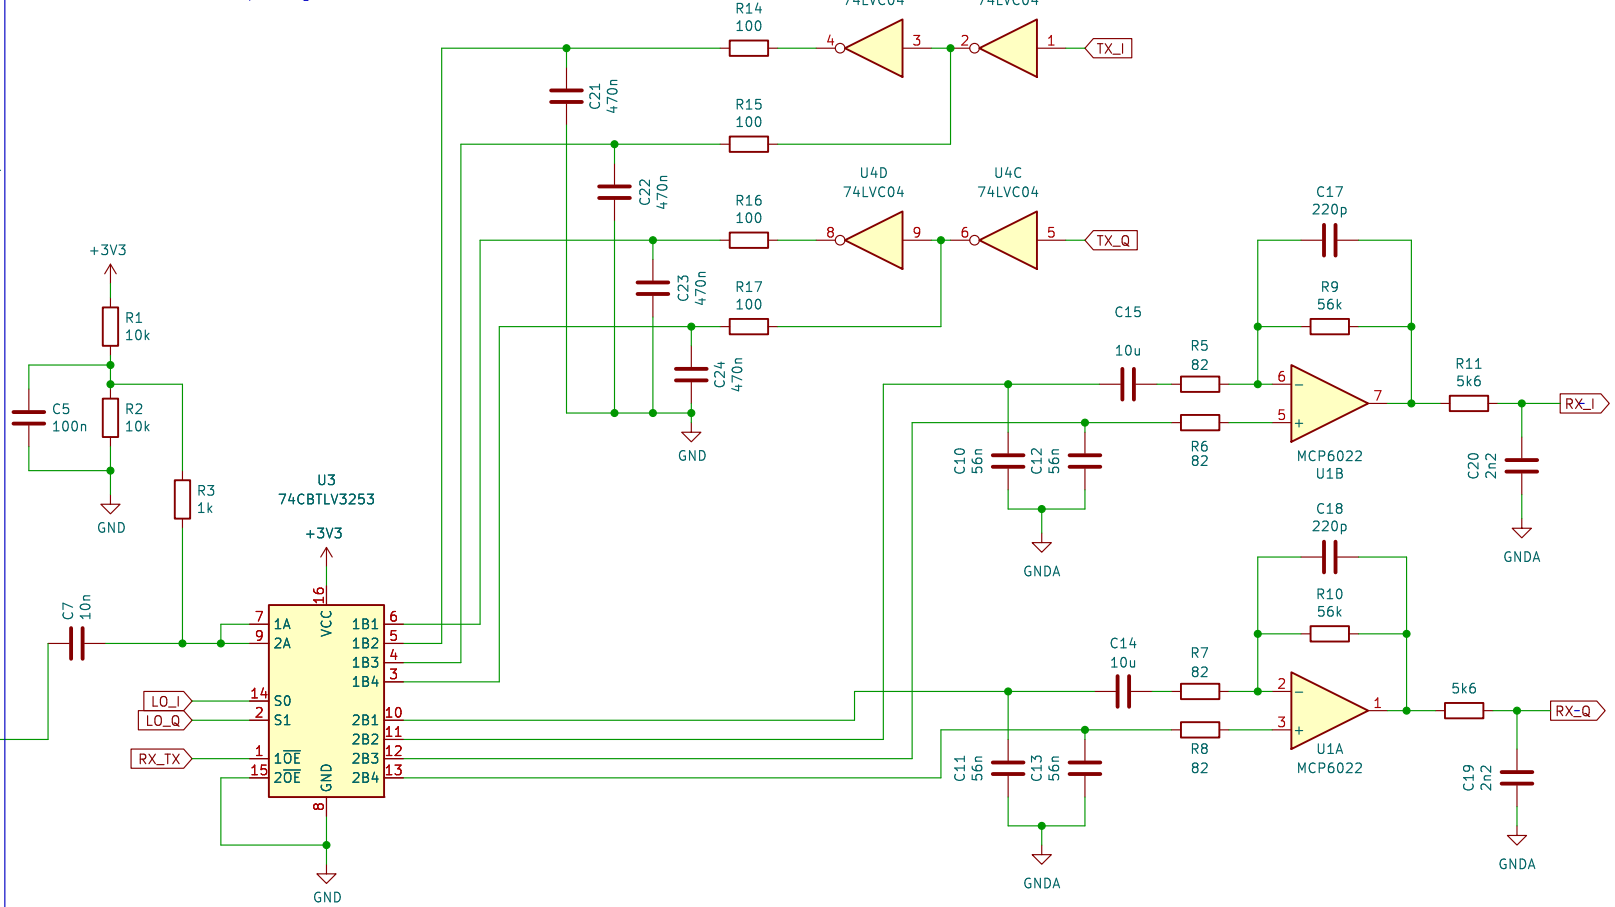


User Interface


I2C OLED Display




Tuning Encoder



Menu Buttons




SI5351 Oscillator Module




(Optional) "Band" outputs may be used to switch up to 8 band filters. (leave unconnected if not required)



(Optional) Secondary SPI TFT Display ILI9341 320x240 (leave unconnected if not required)




Raspberry Pi Pico

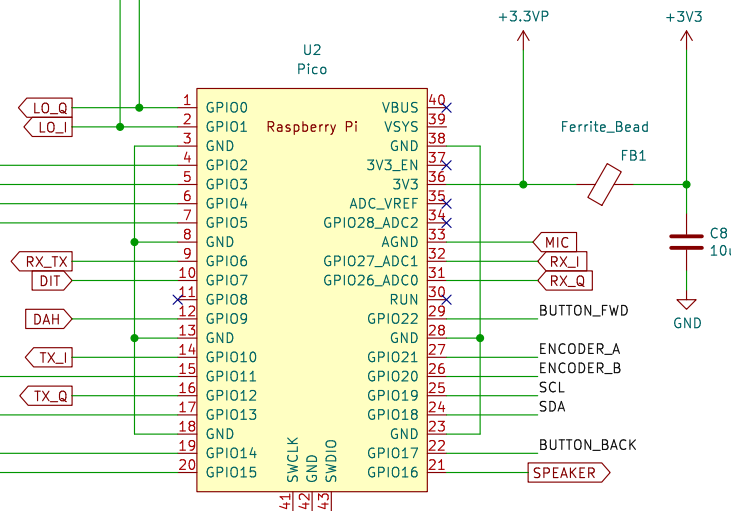

PWM Audio Output

R4, C16 PWM filter cutoff $1/(2 * \pi * 470e-9 * 100) \approx 3\text{kHz}$

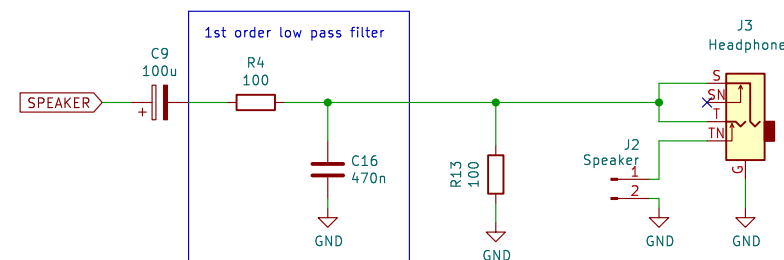

R13 (optional) reduces "speaker pop" if an external amplifier is used. (leave unconnected if not required)

Sheet: /
File: concept.kicad_sch

Title:

Size: User Date:
KiCad E.D.A. 9.0.7

Rev:
Id: 1/1