




1. POWER IN
5 V Bias supply, centre pin GND, 552k, 75k, 5 V bias, 50k rail

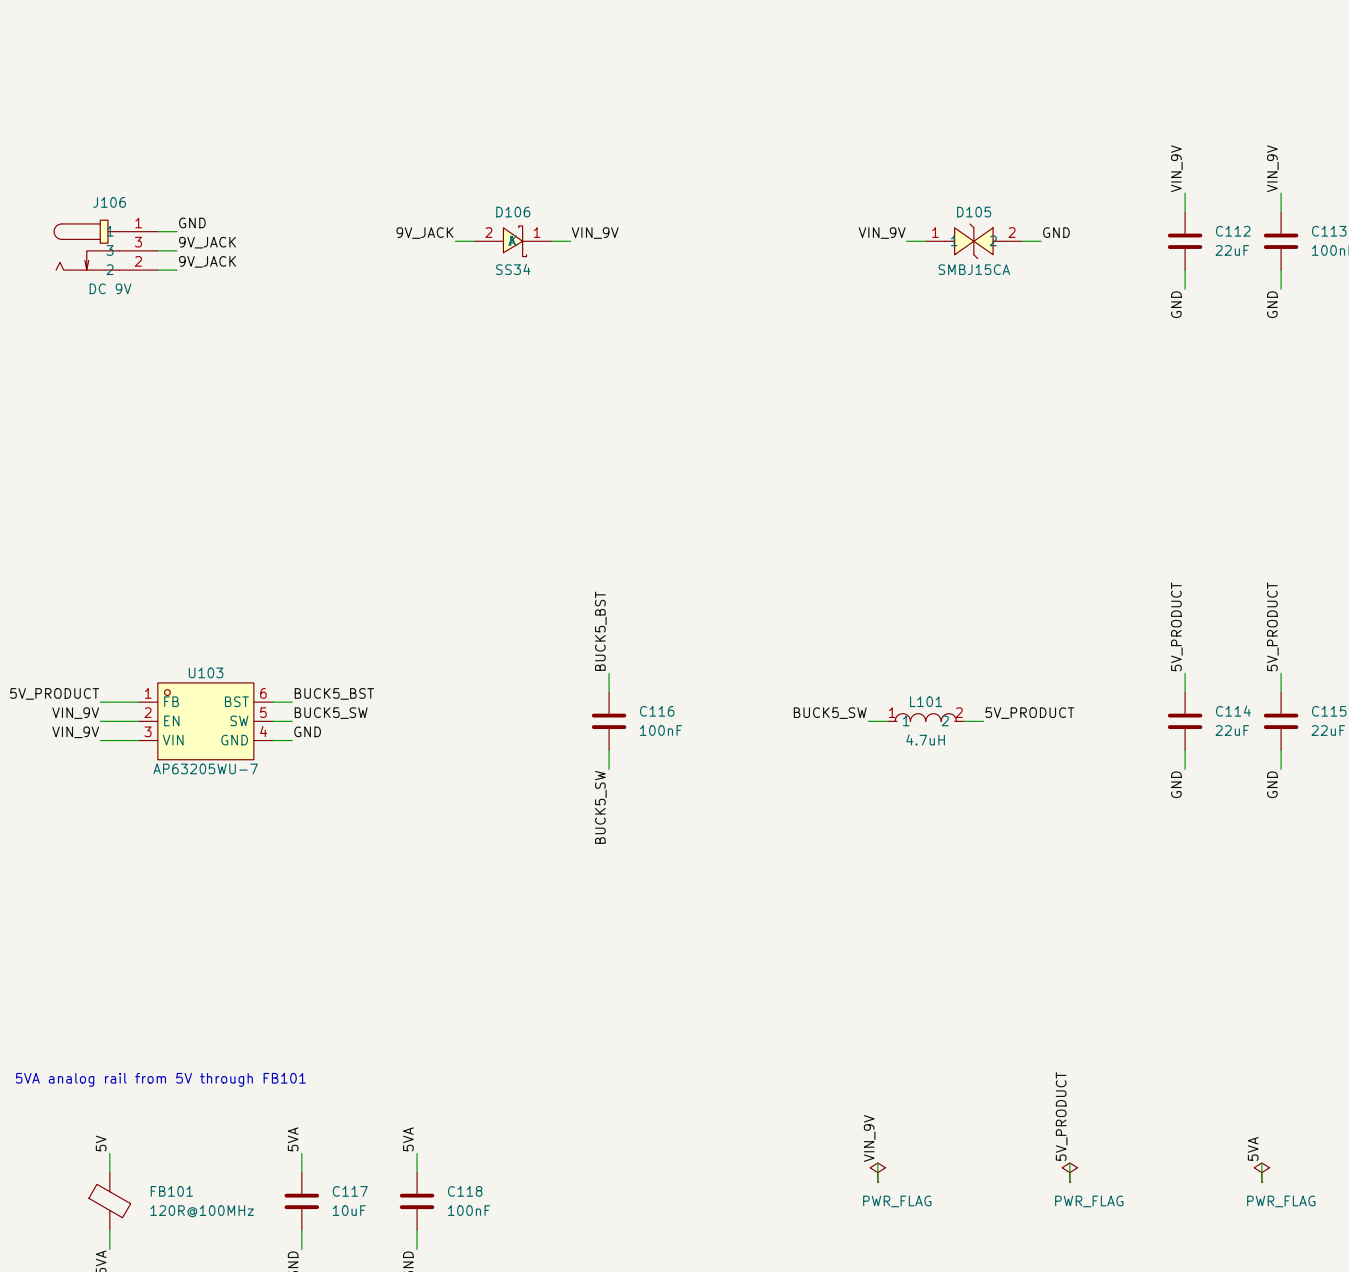


5k analog rail from 5V through R101



7. PANEL
14 pins to U101 (EN, CDS on GND), 3 encoders, 8 toggles, OLED header

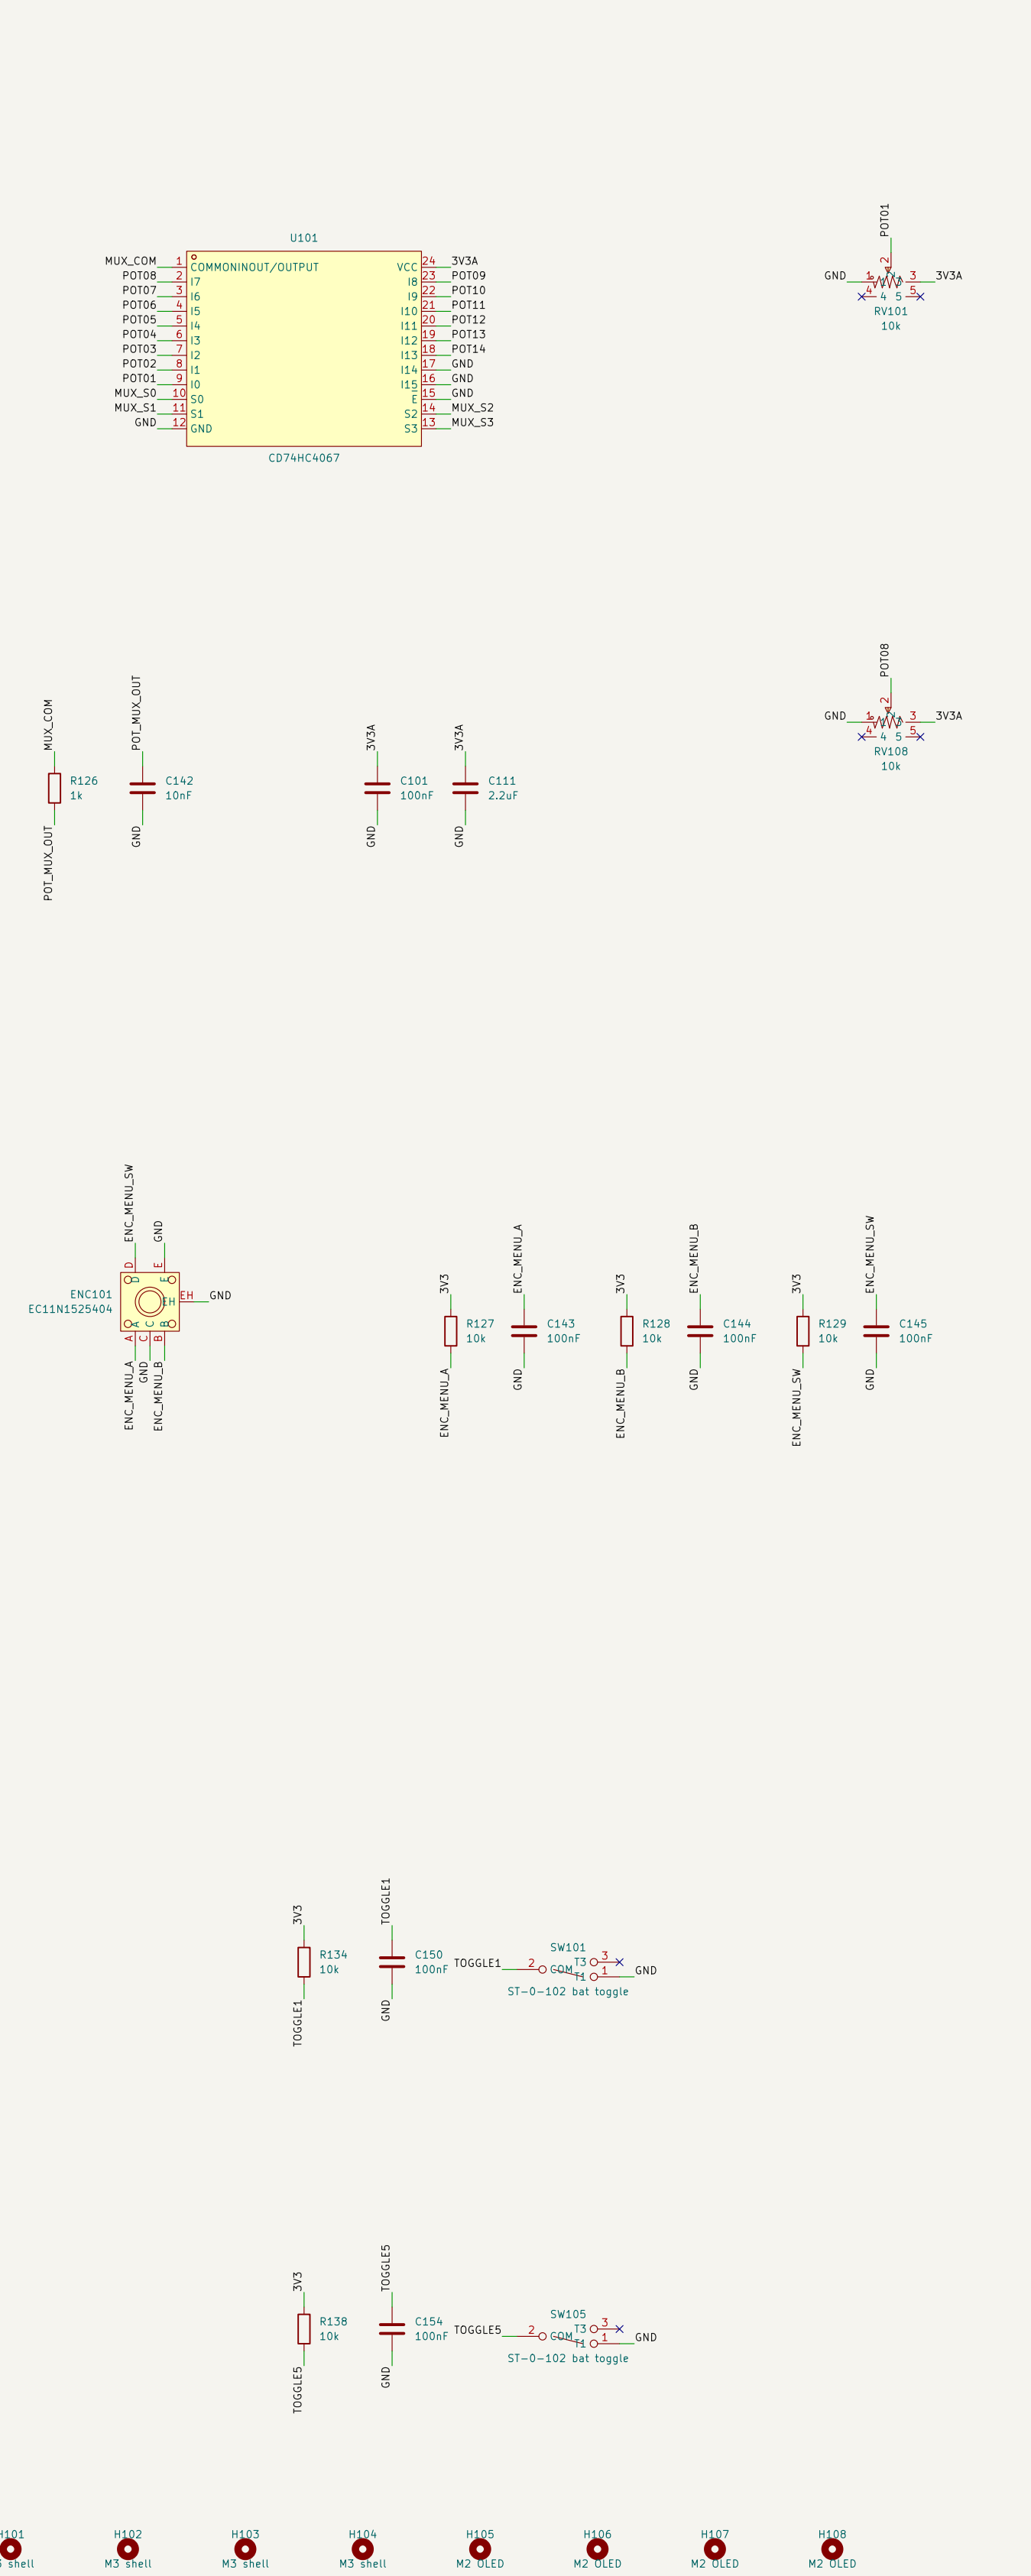


2. MIC / LINE INPUT
AUX sig 47k, BATTERY clamp, 100k to GND, 10k to 15k, 75k sig 15k + LINE in, 10k pad, 1.2k bias to VREF

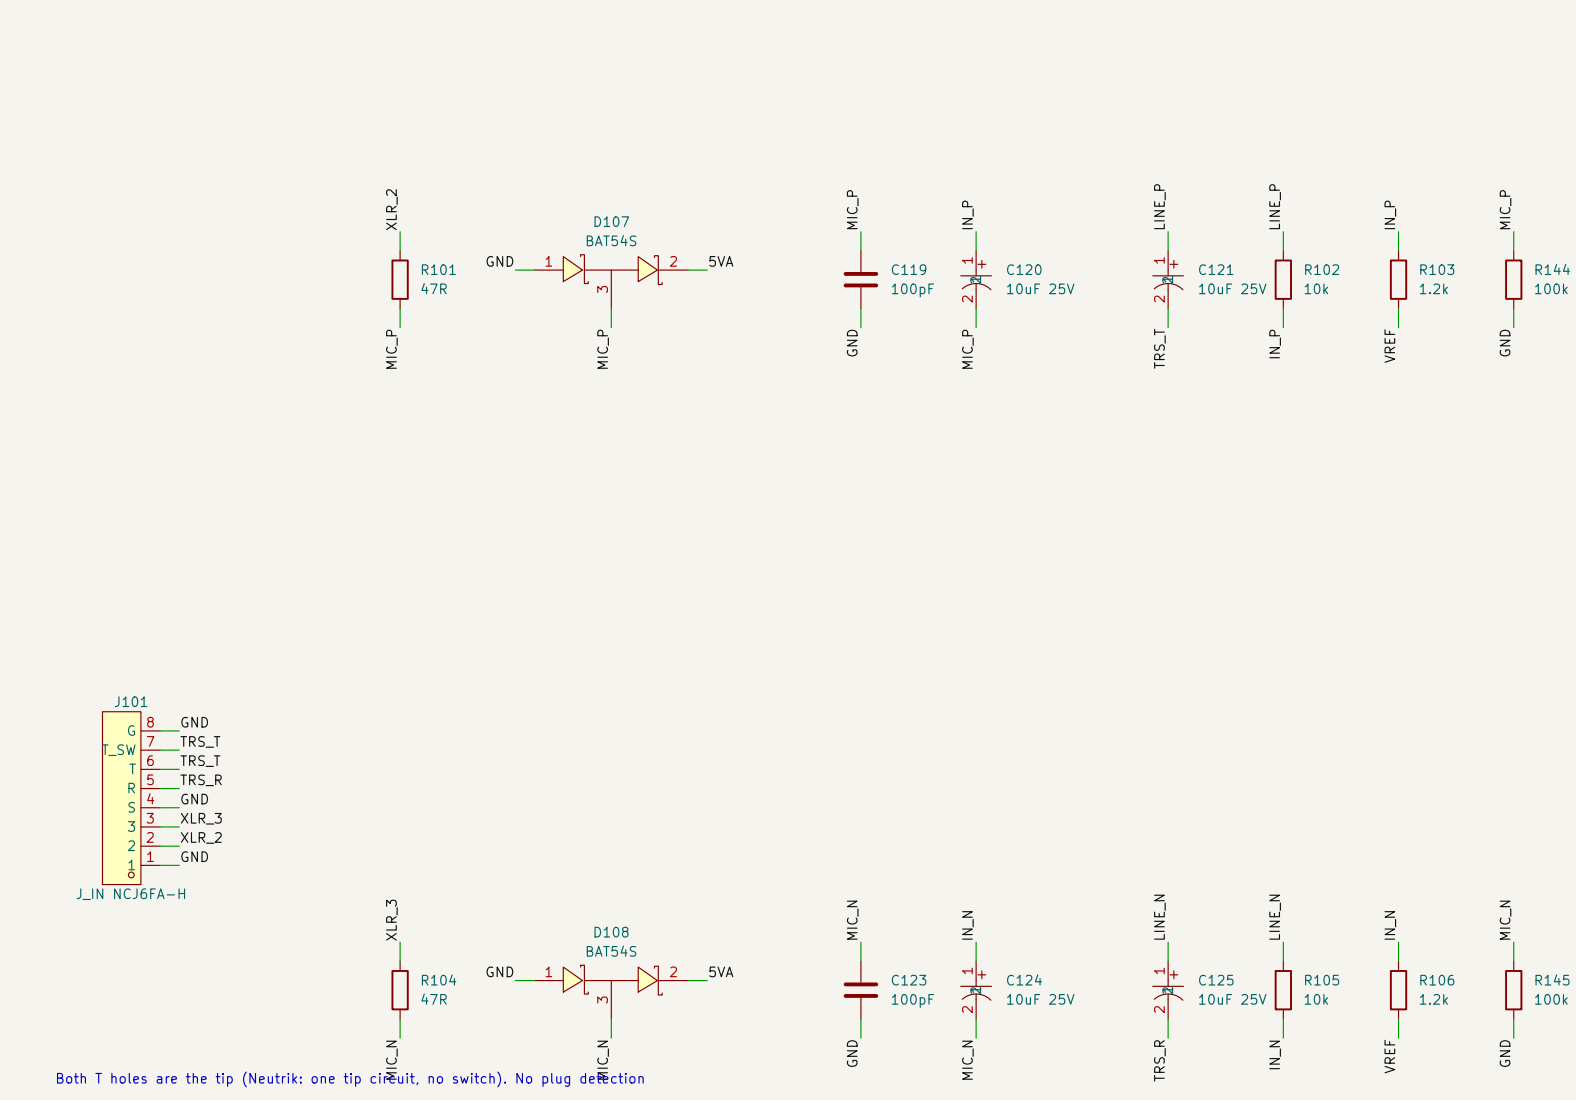


Both T tubes are the tip (Nashville) one tip (Nashville) or switch, no plug operation


3. PREAMP
Stage 1 INA26 dB (101k, 101k), Stage 2 0-2k dB on input Gain pad (101k)
Stage 1 20x dB, Stage 2 0-2k dB, chain 20-60 dB 10k / 6.8k-10k dB 100k, DC gain 1 (DC-coupled inputs)

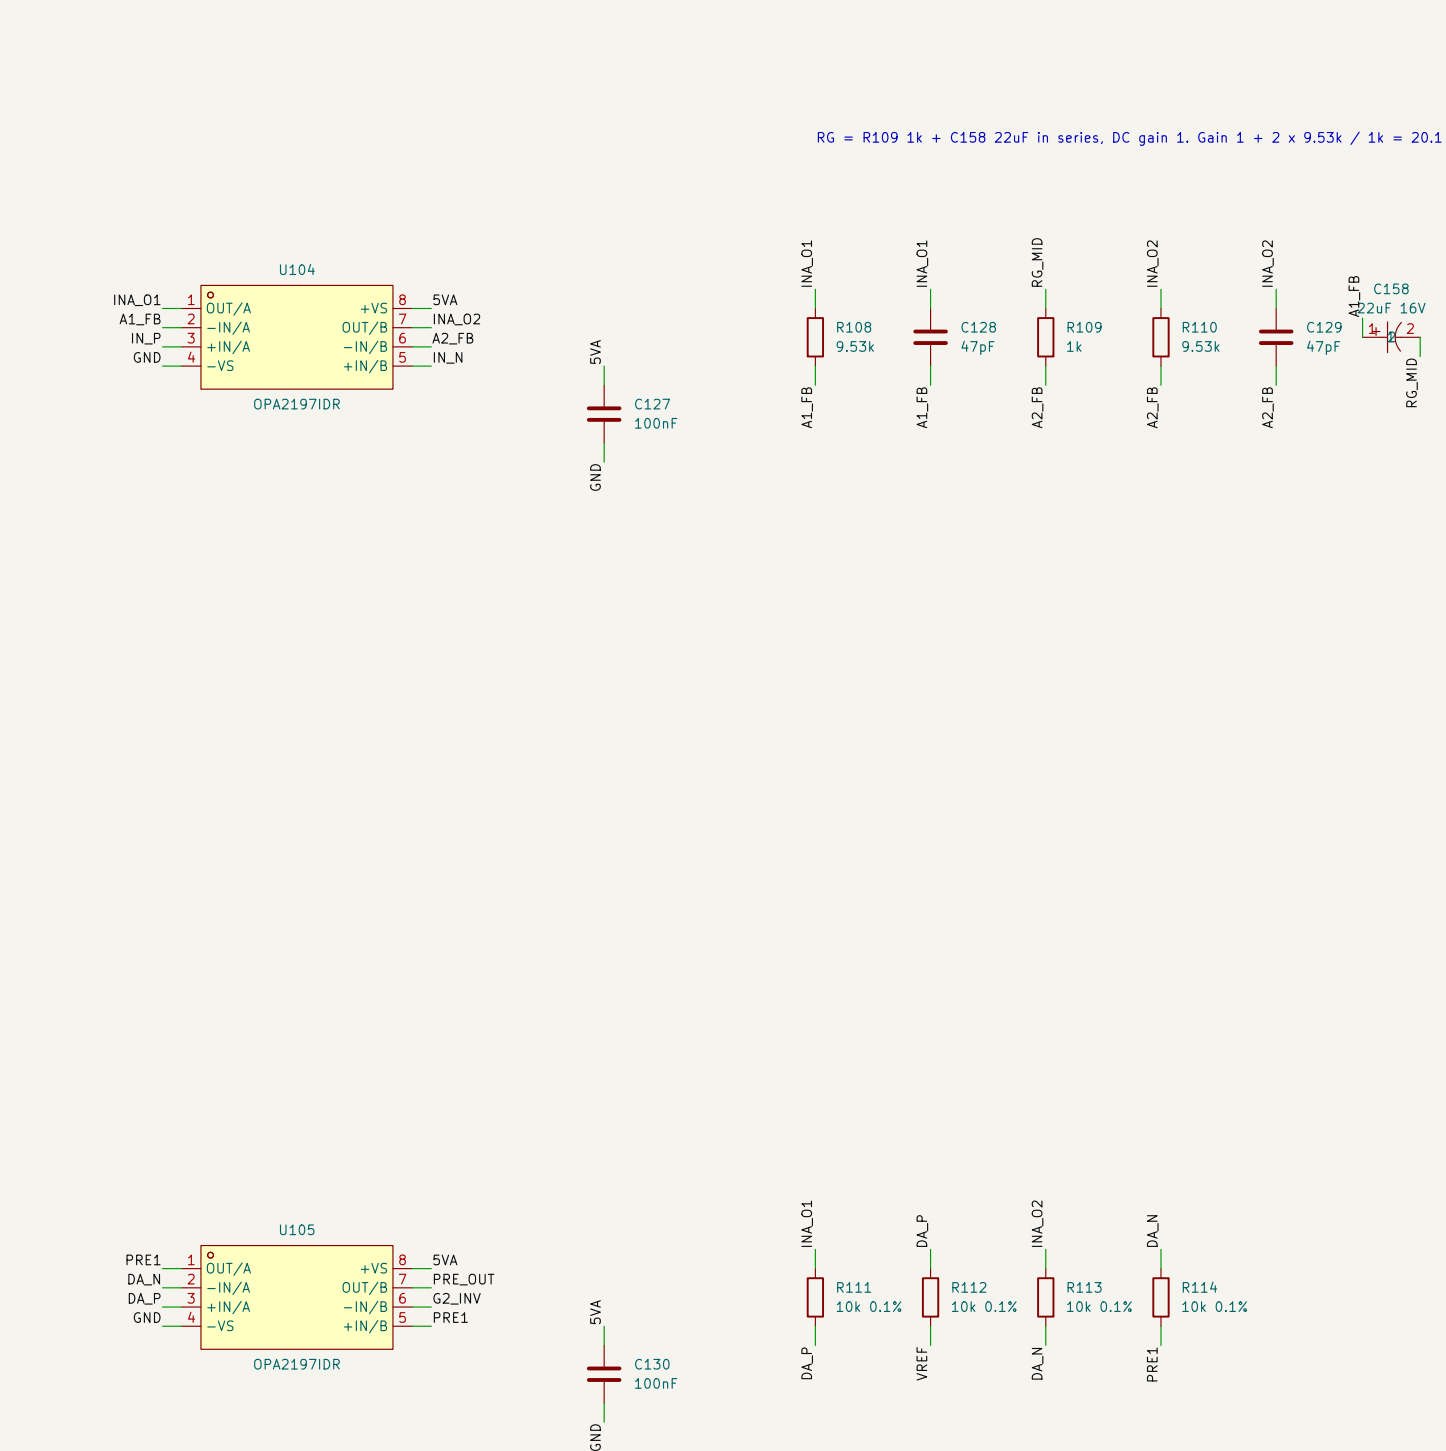


Input Gain pad is the AC feedback resistor, when flat to end 5, 0 = 1 = 10k/200

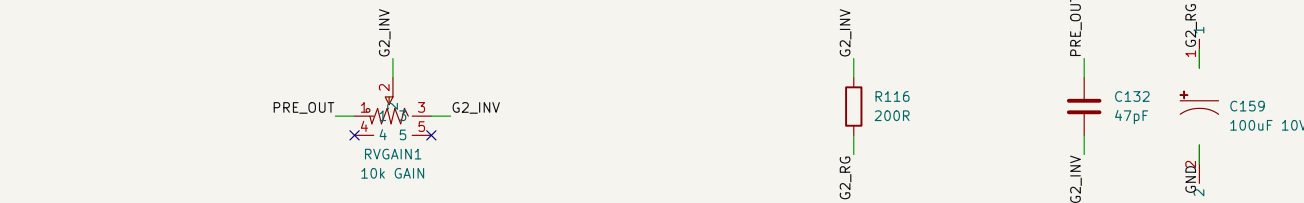

VREF: 50k disabled 15k/15k, 10 uF, battery 101k, 22k into VREF with 10 uF, 101k, 101k, 101k

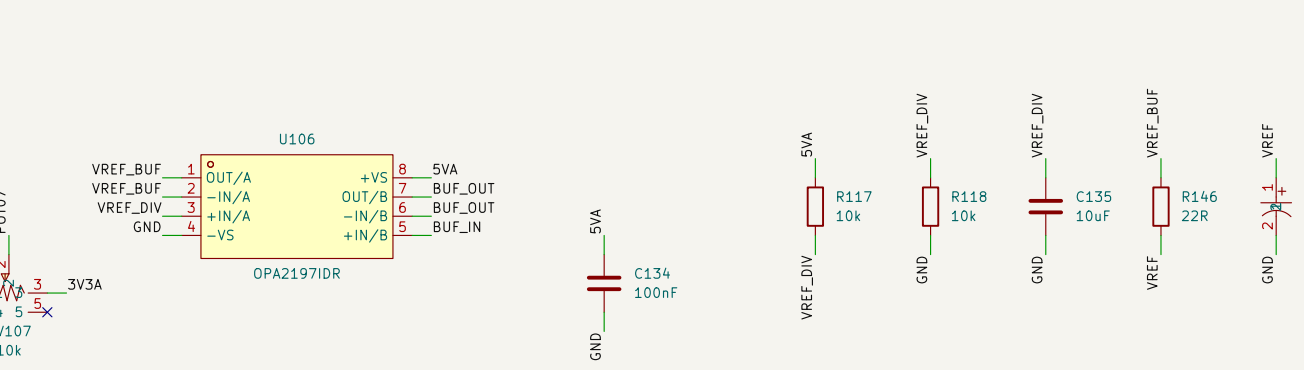


4. ADC FEED
PREOUT always feeds the ADC

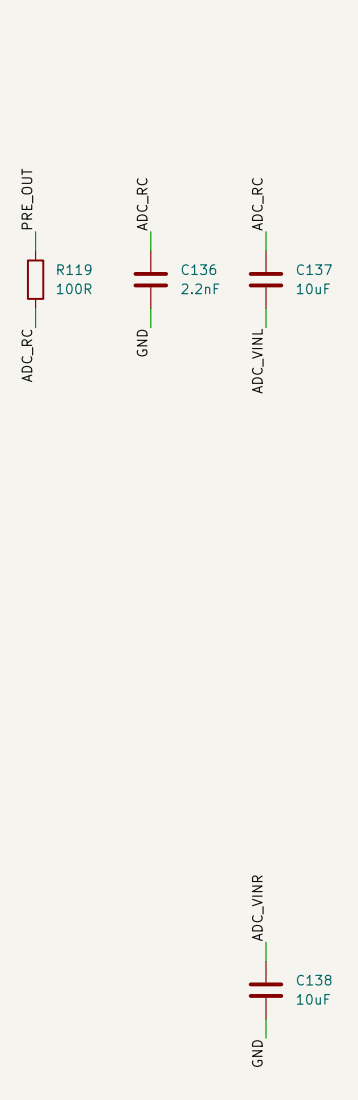


VREF uncorrect, AC-coupled to GND

5. BYPASS
CDS, BUF, IN, NC, PREOUT, NO DAC, ATT, CDS on = effect on

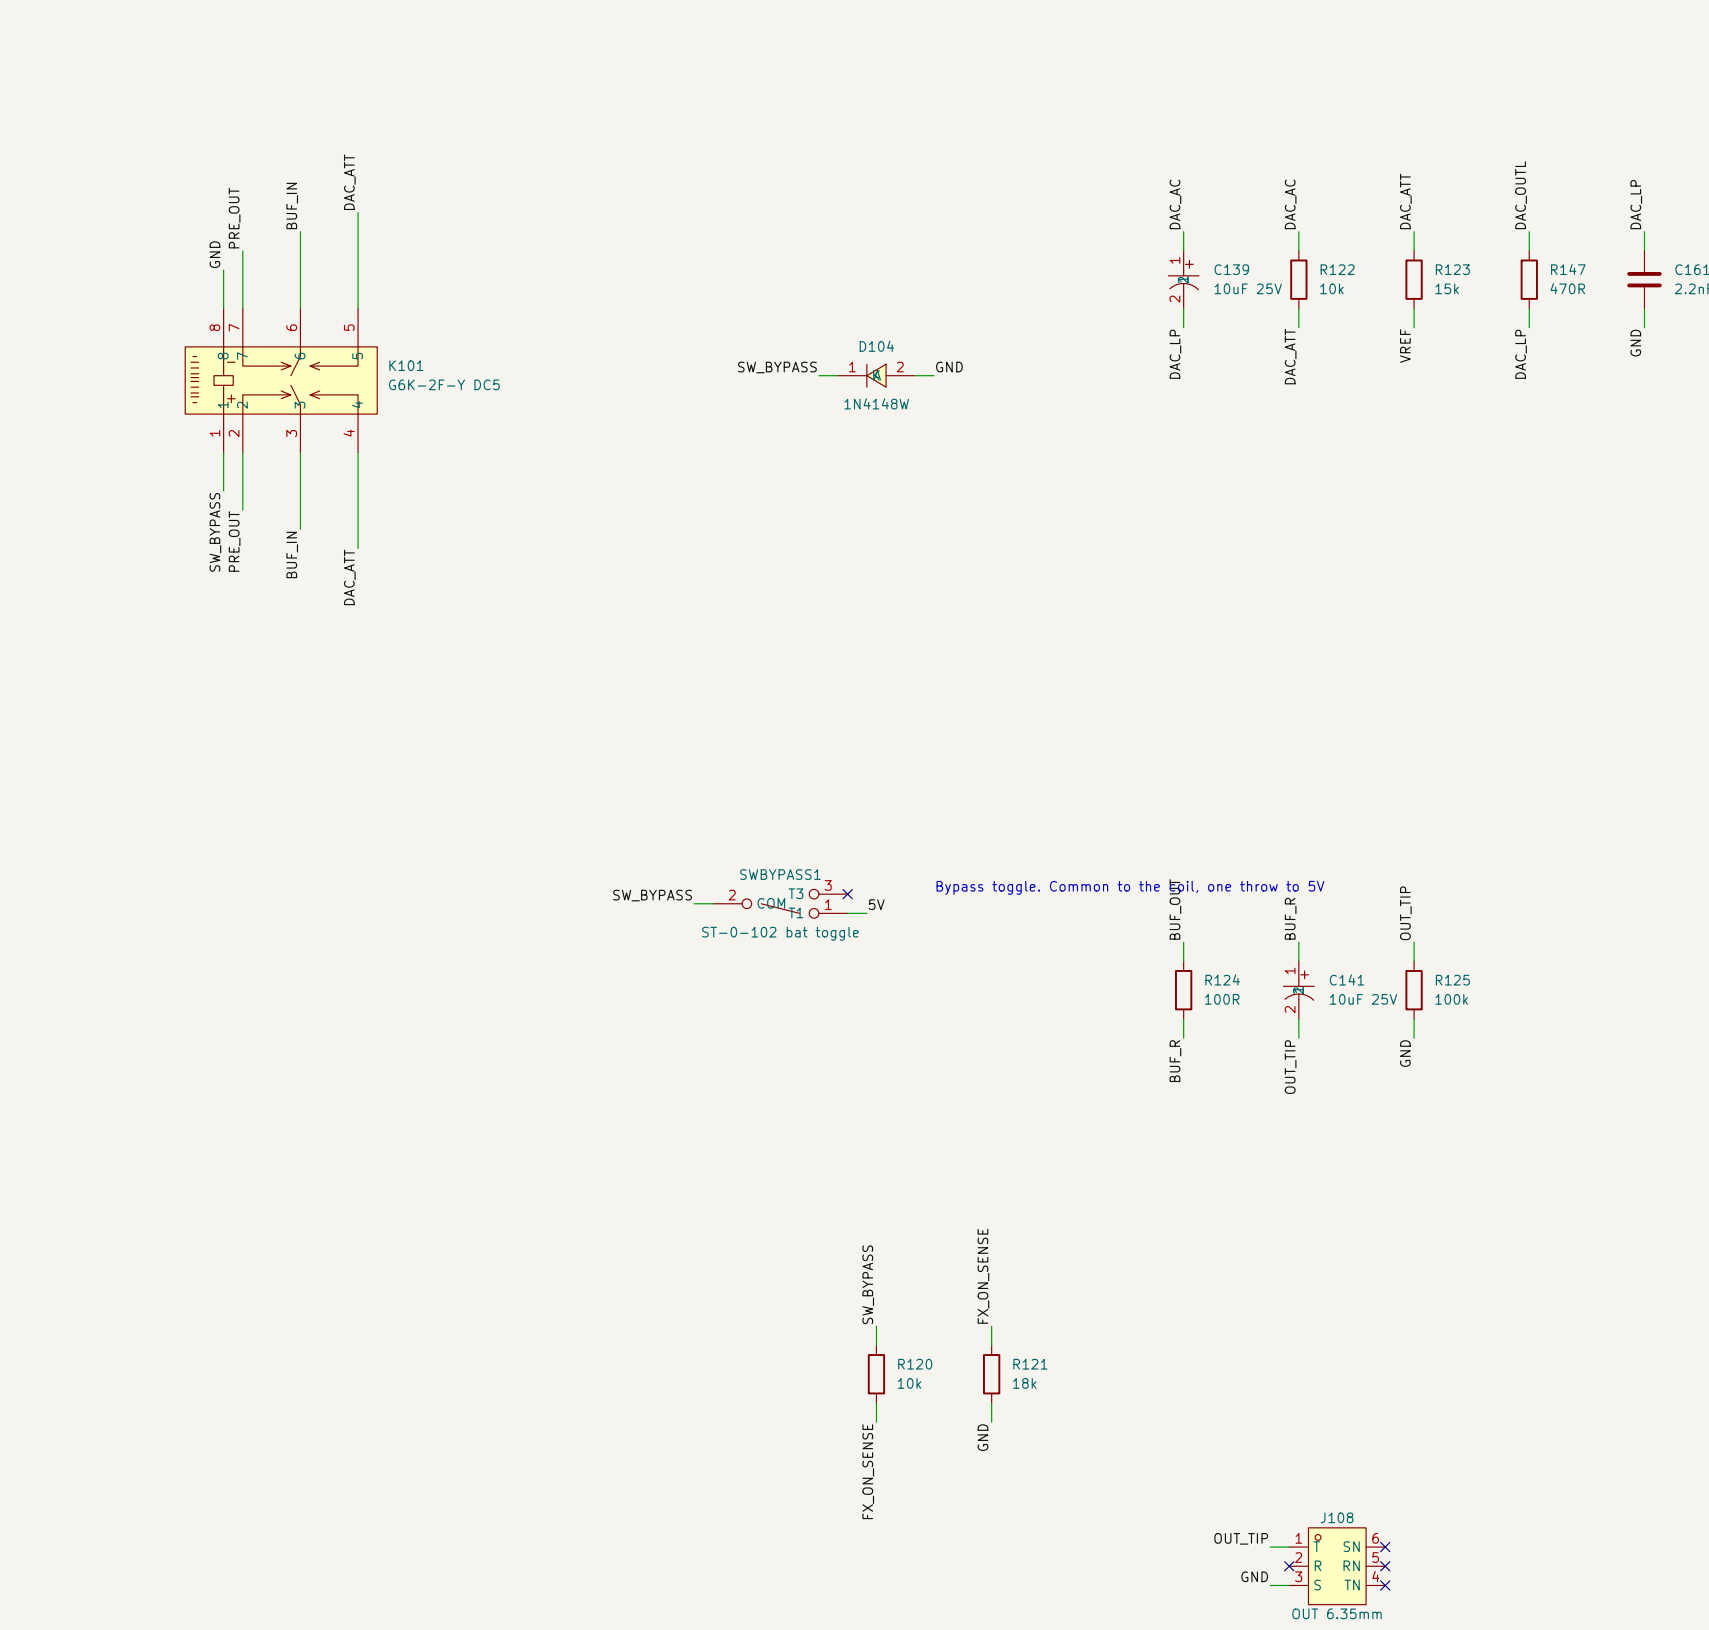

Process toggle, Connect to the 5V and throw to 5V

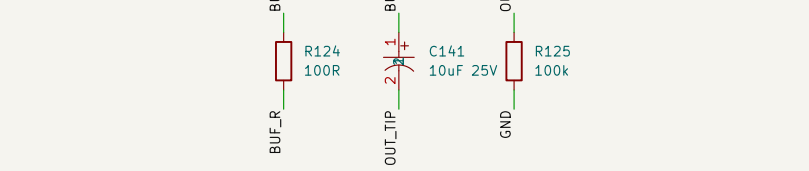

VREF uncorrect, AC-coupled to GND

