HOLOPHANE®



pebble™

Light shaped for comfort, people and environment

BUILD BACK BETTER GOLD WINNER

MADE IN BRITAIN®

Patent pending



pebble™

Pebble introduces a new standard of visual comfort for people-focused outdoor environments. Its sculpted housing and advanced Comfort Optic create a soft, evenly illuminated appearance that helps people feel safe and confident as they move through pathways, plazas and landscaped spaces.

Every detail has been designed to support a calm and welcoming night-time experience, balancing optical control, sustainability and long-term serviceability within a contemporary architectural form.

Applications

- Pathways and walkways
- Plazas and squares
- Public realm
- Campus environments
- Car parks
- Access roads
- Landscaped and recreational areas

Optics/light source

- Comfort Optic engineered for smooth, balanced illumination
- PrismaLED optical technology for enhanced visual comfort and uniform light distribution
- Rotatable optics for precise distribution alignment
- 2700K, 3000K and 4000K colour temperatures
- 70 and 80 CRI options available

Controls

- Compatible with HOLOSOne outdoor lighting controls
- Supports daylight, presence and time-based operation
- D4i driver options for connected site management

Sustainability

- Designed to support TM66 circularity goals
- Serviceable construction with accessible components
- Recyclable materials used where appropriate

Approvals

Complies with EN60598

CE | UKCA Patent pending

IP65 housing for outdoor use
IK Rating: coming soon

MADE IN BRITAIN

For further information please visit the Holophane website **www.holophane.co.uk**

Lighting designed for every outdoor space

Pebble has been developed to bring high-quality, human-centred lighting to public realm environments. Its Comfort Optic combines prismatic control with a soft illuminated surface to deliver balanced light with reduced glare and improved visibility.

Rotatable optics, replaceable components and recyclable materials support long-term value and align with Holophane's commitment to sustainability. Pebble delivers balanced illumination that enhances comfort and promotes confident movement across outdoor environments.



Pathways and Walkways

Pedestrian routes in parks, campuses, residential areas, and promenades.

Plazas and Squares

Open public meeting spaces, civic areas, and modern placemaking environments.

Public Realm

General people-focused exterior spaces that blend architecture, landscape and movement.

Campus Environments

Healthcare, education, and corporate grounds with mixed pedestrian and vehicular traffic.

Car Parks

Surface parking areas require clear, low-glare lighting and safe circulation.

Access Roads

Slow-speed roads within campuses, retail parks, visitor areas or mixed-use sites.

Landscaped and Recreational Areas

Green spaces, waterfronts, communal gardens, leisure environments.







Distribution control and light-shaping options

Pebble supports a range of light distributions, allowing designers to tailor the luminaire to different public realm environments. Whether lighting pathways, plazas, corners or boundary edges, the system provides predictable performance and precise light placement.

The rotatable optical assembly and optional light shields give users further control over light direction and containment, helping manage spill, protect sensitive edges, and support compliance with local lighting requirements.

Available optical distributions

Symmetric distributions

Suitable for plazas, squares and open landscape zones where balanced illumination is required.

Pathway distributions

Optimised for linear spaces such as footpaths, promenades and pedestrian routes.

Boundary control

Available optical distributions help direct light where it is needed while reducing spill light beyond site boundaries and neighbouring properties.

Asymmetric control

Designed for areas where light must reach across a space without creating glare or hotspots.

Back-light shield

Helps reduce light spill behind the luminaire, which supports compliance along boundaries and sensitive edges.

Rotatable optic alignment

The rotatable optic allows the light distribution to be precisely aligned with the application, helping maintain consistent lighting geometry across a site.

Additional application refinement is possible where required. Contact our team to discuss bespoke optical solutions.

These distribution and light-shaping options help ensure Pebble delivers controlled illumination with reduced spill, improving visual comfort while supporting dark-sky considerations and perimeter compliance requirements across public realm spaces.

This precise control of light distribution forms the foundation of Pebble's visual comfort performance.



Comfort built into every detail

By precisely shaping and controlling light distribution, Pebble creates soft, visually comfortable illumination for people moving through outdoor environments. Its Comfort Optic diffuses bright points, reduces glare and produces an evenly illuminated appearance that remains visually consistent from every viewing angle. This helps create inviting outdoor environments where people feel safe and supported as they move through pathways, plazas and landscaped areas.

A recessed optical design prevents upward spill, supporting Dark Sky-friendly installations and helping maintain the natural night environment. The angled LED engine and dedicated transition zone work together to improve visual comfort by softening contrasts between the illuminated surface and the night environment.

Pebble brings together thoughtful optical design and architectural styling to deliver lighting shaped for people and place.

Key features & benefits

Modular optical system

Advantage: Rotatable and interchangeable optical modules provide a range of light distributions to suit different applications and site geometries.

Benefit: Enables lighting designers and engineers to align and select the most appropriate distribution, delivering consistent and controlled illumination across public realm environments.

Comfort Optic with prismatic control

Advantage: Diffuses LED points and manages brightness effectively at eye level, where people experience the light.

Benefit: Reduces glare and creates a more visually comfortable and balanced environment.

Recessed optic for zero uplight

Advantage: Optical geometry sits deeper within the housing to prevent upward spill.

Benefit: Supports Dark Sky-friendly schemes and reduces sky glow.

Transition zone

Advantage: Softens the contrast between illuminated surfaces and the surrounding night environment.

Benefit: Improves visual comfort and clarity for pedestrians, cyclists and motorists, supporting safer navigation through public spaces.

Angled LED engine

Advantage: Works in combination with the optical system to support effective light distribution.

Benefit: Improves uniformity and reduces unnecessary light spill.

Replaceable Optical Pod

Advantage: Optic and LED board are combined into a single serviceable unit accessed via one fixing point.

Benefit: Simplifies maintenance, reduces whole-life cost and supports circularity.

Backlight shield ready

Advantage: Designed to allow retrofit installation of a backlight shield where required.

Benefit: Helps control spill light at site boundaries, supporting compliance with environmental and residential lighting requirements.

PrismaLED story

Engineering light for visual comfort

Holophane's heritage in optical design spans more than 130 years. From our pioneering prismatic glass technology to today's advanced LED luminaires, controlling and shaping light has always been at the heart of our approach.

PrismaLED builds on this heritage by blending, shaping and diffusing light so that illumination appears smoother, more balanced and visually comfortable across outdoor environments.

In people-focused spaces, the quality of light plays a critical role in how safe, welcoming and usable an environment feels. PrismaLED technology enhances visibility by softening contrasts, reducing glare and creating a more uniform luminous surface that supports both horizontal and vertical illumination.

The result is lighting that not only performs efficiently, but also improves visual comfort, spatial clarity and the overall nighttime experience.

Standard optic distribution vs comfort-controlled distribution



Representation of a pedestrian outdoor space using standard LED optics with direct illumination.

Benefits delivered through PrismaLED technology

Provides volumetric illumination

PrismaLED creates a balanced combination of horizontal and vertical illumination. This improves visibility of pathways, architectural features and surrounding environments, supporting clearer spatial awareness and a more comfortable nighttime experience.

Maximises colour consistency

As LEDs age, colour shift can occur. PrismaLED blends light from multiple LEDs so that colour changes remain consistent across the optic, maintaining a stable and uniform appearance throughout the product's lifetime.

Minimises LED failure effect

Traditional optics can reveal LED failures as noticeable dark spots. PrismaLED distributes light evenly across the optic surface, meaning any LED failure appears as gentle dimming rather than a harsh visual defect.

Provides superior optical control

PrismaLED optics precisely shape and distribute light across outdoor spaces. This helps minimise hotspots, shadows and uneven pools of illumination while enhancing the clarity and uniformity of the illuminated area.

Reduces glare

By increasing the illuminated surface area and softening LED brightness, PrismaLED significantly reduces discomfort glare. This creates a calmer and more visually comfortable environment suited to pedestrian routes, plazas and landscaped spaces.

Illustrative comparison inspired by PrismaLED principles, delivering visual comfort in outdoor environments.



Representation of the same space using Pebble's comfort optic, delivering controlled, uniform illumination with improved visual comfort.

Engineered for performance and longevity


Behind Pebble's visual comfort is a carefully engineered system designed to perform reliably over time.

Sealed luminaire housing

Durable construction designed to protect internal components and maintain optical performance in outdoor environments.

Recessed optical architecture

Positions the light source deeper within the luminaire to reduce glare and improve visual comfort at pedestrian viewing angles.

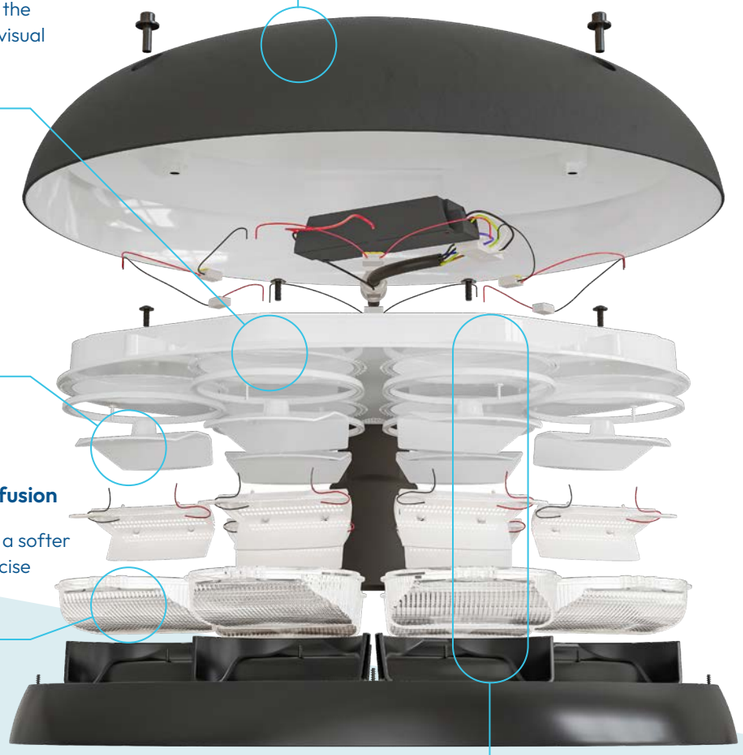

Integrated thermal management

Efficient heat dissipation supports long-term performance and stable optical output.

Comfort optic with PrismaLED diffusion

Blends and diffuses LED light to create a softer luminous surface while maintaining precise optical control.

Modular optical POD

Interchangeable optical module providing a range of light distributions to suit different applications and site geometries.

Built for reliable outdoor performance

Robust construction supports long-term operation in demanding environments	Integrated thermal management maintains consistent light output over time	Sealed housing protects critical components from environmental exposure	Modular design supports serviceability and future flexibility

Engineered for thermal stability

Effective thermal control is essential for maintaining LED performance, efficiency and longevity. Pebble has been designed with a carefully engineered thermal management system that helps move heat away from the LED engine and sensitive electronics.


By controlling heat transfer through the luminaire housing, Pebble maintains stable operating temperatures, supporting consistent optical performance and reliable long-term operation in outdoor environments.

Heat transfer pathway

Internal geometry supports efficient heat movement through the luminaire body.

Thermally conductive aluminium housing

Engineered to draw heat away from the LED light engine.

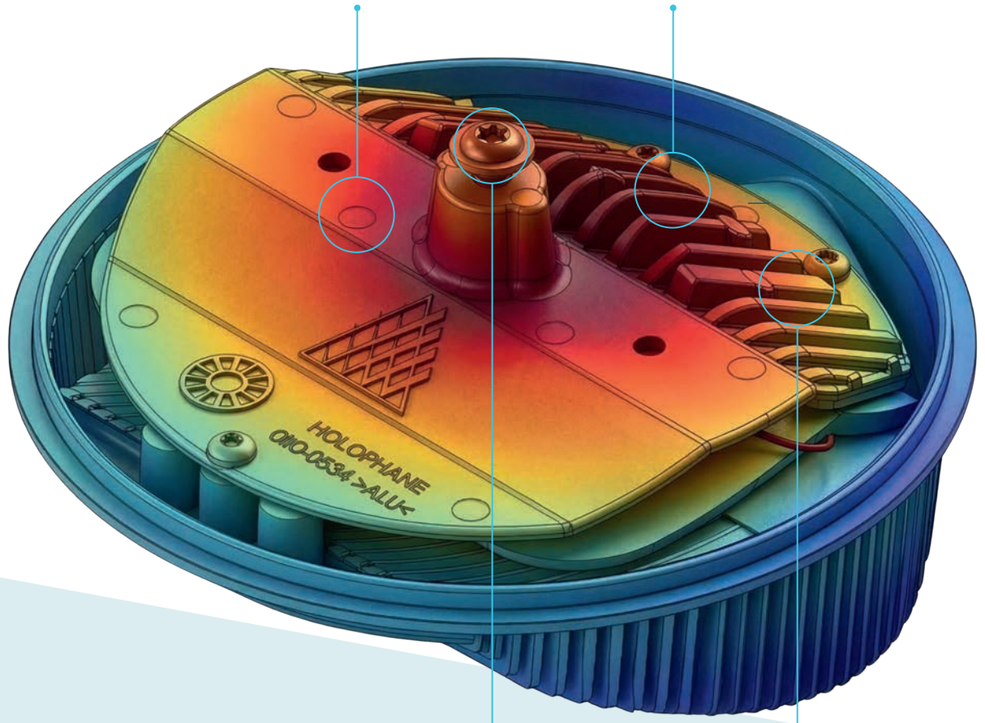

Separated optical and electronic zones

Helps protect sensitive components from thermal stress.

LED engine thermal interface

Designed to maintain stable LED junction temperatures.

Advanced thermal management for long-term reliability

Effective thermal control is essential for maintaining LED performance, efficiency and lifespan. Pebble has been designed with a robust thermal management system that helps move heat away from sensitive electronic components and into the surrounding environment. This supports stable lumen output, consistent colour performance and dependable long-term operation in all seasons.

The thermally optimised housing improves heat transfer while protecting the LED engine from unnecessary stress. By allowing the system to operate within safe temperature limits, Pebble reduces the risk of premature component degradation and helps maintain visual consistency across the illuminated surface.

A well-managed thermal system helps ensure that the luminaire performs reliably throughout its lifetime. By keeping operating temperatures stable, Pebble supports improved efficiency, consistent light quality and extended product durability in real-world outdoor settings.

How Pebble manages heat

Protection for sensitive components

Heat is directed away from the LED array and driver electronics, reducing stress on critical components.



Optimised internal geometry

The internal design supports efficient heat transfer through the luminaire body.

Thermal stability for consistent light output

Maintaining stable temperatures helps preserve lumen performance and colour consistency.

Reliable operation in outdoor environments

The thermal system supports dependable performance across seasonal temperature variations.


Installation made simple

Pebble has been designed to make installation as straightforward as possible for contractors and maintenance teams. Its compact housing, accessible entry points and clear mounting interfaces help reduce installation time and minimise disruption on site. Whether mounted on columns, posts, or architectural structures, Pebble provides a reliable, repeatable setup process that supports consistent alignment and aiming.

Installation features

Integrated safety strap

Secures the enclosure during maintenance, acting as a dual-point hinge to provide a stable opening and support safer working at height.

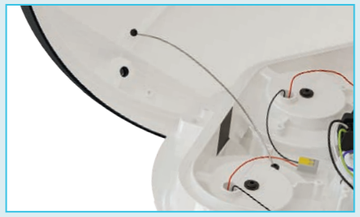

Clear mounting interfaces

Pebble's mounting system is designed for quick, consistent positioning, helping ensure accurate alignment across pathways, plazas and landscaped spaces.




Dedicated fixing points

Defined fixing locations simplify installation and ensure accurate positioning, reducing the need for on-site adjustments.



Accessible cable entry

Cabling is positioned for easy access during installation, reducing handling time and enabling a clean, secure connection.

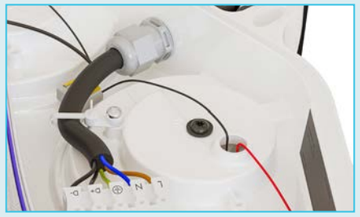

Optional factory-prepared wiring

Factory-prepared flying leads simplify electrical connections and help reduce installation time and complexity on site.



Compact and lightweight housing

The balanced design makes Pebble easier to handle during installation, especially on shorter columns or architectural structures.



Designed for maintenance and serviceability

Easy access for long-term care

Pebble supports long-term reliability with a design that provides straightforward access for maintenance teams. Internal components are arranged to make checks and replacements simple, helping extend the luminaire's service life and reduce overall maintenance costs. The housing is engineered to protect the optical chamber while still allowing access to key components when required. This supports predictable and low-stress servicing throughout the life of the installation.

RIGHT TO REPAIR

Maintenance features

Accessible driver compartment

The driver can be reached without disturbing the optical chamber, which helps keep maintenance tasks simple and reduces risk during servicing.

Component replaceability

Serviceable parts are arranged to facilitate straightforward replacement, helping extend the luminaire's life and reduce waste.

Sealed optical chamber

The optical assembly remains protected during maintenance, helping maintain long-term performance and reducing the need for cleaning or adjustment.

Durable materials

The housing and mechanical components are designed for long-term outdoor use, which reduces deterioration and the need for frequent interventions.

Designed to support right-to-repair

Pebble has been developed with serviceability in mind, helping ensure key components can be accessed, maintained and replaced where required. This approach supports right-to-repair principles and contributes to circular product design.

By combining straightforward installation with accessible maintenance pathways, Pebble helps extend product service life and reduce long-term operational costs.

This considered approach makes Pebble a dependable solution for public realm environments where reliability, longevity and consistent performance are essential.



Mounting options

Pebble has been designed as a versatile family of luminaires that can be installed across a wide range of public realm environments. Its mounting options support consistent visual appearance, simplified specification and seamless integration with both existing and new infrastructure.

Each mounting type maintains the same optical performance and design language, ensuring a unified aesthetic across pathways, plazas, landscaped areas and mixed-use environments.



Post-top

Pebble can be mounted directly onto a column using a post-top interface. This approach provides a clean, architectural appearance and is ideal for pathways, plazas and landscaped environments.



Side-entry

The side-entry option allows Pebble to be installed on outreach arms, existing columns or architectural brackets. This offers flexibility for retrofit projects and supports consistent alignment across more expansive spaces.



Cradle-mount

The cradle-mount variant provides a design-led solution for contemporary public realm spaces. It allows Pebble to be carried within a sculptural frame that supports modern placemaking and visual cohesion across a site.



Why mounting choice matters

Selecting the right mounting approach helps ensure that lighting blends seamlessly with its surroundings while delivering the intended performance. Pebble's mounting options support consistent alignment, simplified installation and a unified visual identity across a site.

Whether used in a single zone or across a large public realm environment, the family enables planners and designers to maintain a cohesive appearance without compromising performance.

One luminaire. Multiple mounting solutions. Complete site flexibility.

A simple visual guide to how Pebble adapts across different environments using post-top, side-entry and cradle-mount configurations.

	 Post-top	 Side-entry	 Cradle-mount
Pathways and walkways	•	•	
Plazas and squares	•		•
Public realm	•	•	•
Campus environments	•	•	
Car parks		•	
Access roads		•	
Landscaped and recreational	•		•

Note. The post-top mounting option cannot be used for side-entry installations.

One platform
Total visibility

Unified control. Outdoors and across y

HOLOSOne is Holophane's intelligent wireless lighting controls platform that unifies lighting control across your entire site. From production halls and warehouses to access roads and yards, it provides complete visibility and control—indoors and out.

Trusted technology. Proven performan

Built on secure Silvair Bluetooth NLC Mesh and backed by over 130 years of lighting expertise, HOLOSOne delivers scalable performance and built-in sustainability—giving you control you can trust.

One open standard. Every space.

While traditional systems often separate interior and exterior zones, HOLOSOne simplifies everything with open-standard protocols and hardware designed for both indoor and outdoor applications—reducing complexity and future-proofing your infrastructure.

Scalable architecture. Simple to deploy.

The system can operate in standalone mesh mode, configured via a Bluetooth-enabled mobile device, or scale to a cloud-connected solution. With support for up to 200 devices per gateway, HOLOSOne offers real-time access to diagnostics, scheduling, and energy reports.

Gateway(s) required for remote access, automated diagnostics, energy reporting and heat map visualisation.

Smarter strategies. Lower emissions.

From daylight harvesting and occupancy sensing to emergency reporting, HOLOSOne puts every energy-saving strategy at your fingertips—designed to cut emissions and simplify lighting management.



Controlled Technology





Operating platforms

HOLOSOne Technology Partner SILVAIR

Pebble can be integrated with HOLOSOne to support both localised control and fully connected management across public realm environments. The platform gives users the flexibility to manage single locations or large multi-zone areas while maintaining consistent lighting performance and visibility across a site.

Platform 1 (local system)

Platform 1 supports **independent and localised lighting control**. It is ideal for areas where on-site configuration is preferred and where luminaires can be easily accessed during commissioning.


Suitable for:
- Pathways and walkways
- Public squares and plazas
- Car parks and access roads
- Smaller campus or landscape zones

Independent control



and / or

Localised control



Platform 2 (remote system)

Platform 2 provides users with **more freedom to manage their sites remotely**, both on and off-site, without being within the range of the lighting network to configure changes. This is ideal for situations where monitoring multiple sites from a central location is crucial and updates can be applied to all devices remotely.

Benefits include:
- Remote configuration and commissioning
- Site-wide scheduling
- Group, zone and area control
- Real-time insights and asset visibility

Cloud control



Features	Platform 1 (local system)	Platform 2 (remote system)
PIR occupancy and vacancy sensing	✓	✓
Daylight harvesting	✓	✓
Photocell control	✓	✓
Scene setting control	✓	✓
Lighting zones and zone linking	✓	✓
Local emergency scheduling and reporting	✓	✓
Time-based scheduling	✓	✓
Energy monitoring and reporting		✓
Occupancy heat map visualisation		✓
Remote emergency scheduling and reporting		✓
Gateway (subscription required)		✓

Scan me

Discover how our service plans keep your system running at its best.

Dimensions & performance


Typical luminaire performance for 4000K

Configuration	Delivered Lumens	Circuit Power (W)	Luminaire Efficacy (lm/W)
PEB.1.LM034	3,104	20	155
PEB.1.LM044	4,115	26	158
PEB.1.LM054	5,127	32	160
PEB.1.LM064	6,140	38	162
PEB.1.LM074	7,154	44	163
PEB.1.LM084	8,183	50	164
PEB.1.LM094	9,209	57	162
PEB.1.LM104	10,700	66	162
PEB.1.LM114	11,254	70	161
PEB.1.LM124	12,270	77	159
PEB.1.LM134	13,295	85	156
PEB.1.LM144	14,112	90	157
PEB.1.LM154	15,029	97	155
PEB.1.LM164	16,025	105	153
PEB.1.LM174	17,012	113	151
PEB.1.LM184	18,017	121	149
PEB.1.LM194	19,036	130	146
PEB.1.LM204	20,004	139	144

Note: The delivered lumens are averages of all distributions types. All performance variants are based on a 288 LED configuration. The specifications of the Holophane luminaire represents typical values. All descriptions, illustrations, drawings and specifications in the Holophane catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement. *Refers to standard luminaire only. Does not account for weight of any additional options or accessories.


Dimensions

dimensions in mm

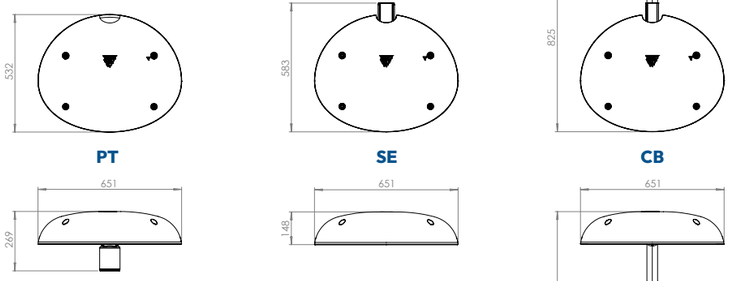


Configuration	Weight (kg)	Windage (m^2)
PEB.PT	10.4	0.09
PEB.SE	10.1	0.08
PEB.CB	15.8	0.14


Optics




Symmetric (.SY)




Asymmetric (.AY)



Long & Narrow (.NR)



Forward Throw (.FW)



Forward Throw Extra (.FWE)

Ordering details



Code	Product Family
PEB	Pebble

Code	Series (required)
.1	Series 1

Code	
.LM03X	LED light engine producing c.3,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM04X	LED light engine producing c.4,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM05X	LED light engine producing c.5,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM06X	LED light engine producing c.6,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM07X	LED light engine producing c.7,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM08X	LED light engine producing c.8,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM09X	LED light engine producing c.9,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM10X	LED light engine producing c.10,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM11X	LED light engine producing c.11,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM12X	LED light engine producing c.12,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM13X	LED light engine producing c.13,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM14X	LED light engine producing c.14,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM15X	LED light engine producing c.15,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM16X	LED light engine producing c.16,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM17X	LED light engine producing c.17,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM18X	LED light engine producing c.18,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM19X	LED light engine producing c.19,000 lm with a nominal 2700K/3000K/4000K colour temperature
.LM20X	LED light engine producing c20,000 lm with a nominal 2700K/3000K/4000K colour temperature

Replace X with
2 for 2700K,
3 for 3000K,
4 for 4000K

Code	Distribution (required)
.SY	Symmetric Distribution
.AY	Asymmetric Distribution
.NR	Long & Narrow Distribution
.FW	Forward Throw Distribution
.FWE	Forward Throw Extra Distribution

Code	Colour (required)
.C1	Smooth White (RAL9016)
.C4	Graphite (RAL 7011)
.C6	Smooth Grey (RAL7035)
.C7	Black (RAL9005)
.C9	Metallic Silver (RAL9006)
RAL****	RAL Colour (Customer choice)

Code	Fixing Method (required)
.PT1	Post top 76/60mm only
.PT2	Post top 60mm only
.SE1	34/42mm side entry mounting (using internal reducer)
.SE2	60mm side entry mounting only
.CB1	Cradle Mount 76mm
.CB2	Cradle Mount 60mm

Code	Paint Finish (option)
.C	Enhanced Paint Finish

Code	Photocells (option)
.TSZ	Complete with miniature 70 lux factory fitted photocell. (Zodion SS12)
.T1	Complete with NEMA socket. (To accept standard NEMA photocell, available from Holophane).
.T7	Complete with 7-pin dimming NEMA ANSI C136.41 socket (suitable photocell/node supplied by others).
.T7T	Complete with 7-pin dimming NEMA ANSI C136.41 socket (photocell/node supplied by others) with weather proof locking top.
.TZ01	Complete with 4-Pin Zhaga Socket - 'Top' (suitable photocell/node available from Holophane or supplied by others) with weather proof locking top.
.TZ02	Complete with 4-Pin Zhaga Socket - 'Bottom' (suitable photocell/node available from Holophane or supplied by others) with weather proof locking top.
.TZ03	Complete with 4-Pin Zhaga Socket – 'Top' & 'Bottom' (suitable photocell/node available from Holophane or supplied by others) with weather proof locking top.

Code	Dimming Outputs (option)
.LRD	DALI
.LRT56	Pre-set to dim to 50% between 12am to 6am
.LRT66	Pre-set to dim to 60% between 12am to 6am
.LRT76	Pre-set to dim to 70% between 12am to 6am
.LRT***	Customer specified pre-set dimming

Code	Controls (option)
.CA	Wireless lighting node for use with Holophane Controlux Air System.
.CAP	Wireless lighting node (top socket) & PIR (bottom socket) for use with Holophane Controlux Air System.
.H1P	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with PIR sensor for mounting heights of up to 12m - Conical detection zone. Suitable for luminaires with TZ02 & TZ03. Wireless range 60 metres in line of sight. Also includes integrated photocell which will require activation and calibration during the commissioning process. Please note that the on/off point will be dependent on site conditions such as surface reflectance and light-spill.
.H1S	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with photocell light sensor. Suitable for luminaires with TZ01 or TZ03. Wireless range 30 metres in line of sight.

Code	Control Gear (option)
.CL7	Programmed to deliver 70% of the initial lumens over the life of the luminaire.
.CL8	Programmed to deliver 80% of the initial lumens over the life of the luminaire.
.CL9	Programmed to deliver 90% of the initial lumens over the life of the luminaire.

Code	Auxiliary Circuits
.CPROTEC	With 10KV surge protection

Code	Voltage (option)
.CII	Class II

Code	Cable Entry (option)
.E3 to .E9	Single flex cable available from 3m to 9m in 1.5mm² or 2.5mm². 3 or 5 core single cable "flex" (5 core if LRD is selected)

PEB	.1	.LM032	.SY	.C1	.PT1	.C	.TSZ	.LRD	.CA	.CL7	.CPROTEC	.CII	.E3

Example

EarthLIGHT

Lighting built on sustainability

EarthLIGHT is Acuity Inc.'s global sustainability framework, guiding how we design products, operate responsibly and contribute positively to the environments and communities we serve.

Through EarthLIGHT, we focus on reducing environmental impact, improving operational efficiency and developing lighting solutions that help customers lower energy use and carbon emissions while supporting long-term performance.

DOWNLOAD BROCHURE

Our 4 pillars of eco-design guide how we create more sustainable lighting solutions.

Pillar 1

Sustainable

Creating the best luminaires with the least amount of resource.

How are we doing it?

- Using recycled materials wherever possible.
- Reducing unnecessary materials, weight and component count.
- Ensuring only the components required for performance are used.
- Reducing labour time and energy consumption during the manufacturing process.

Pillar 2

Scalable

Customising each product exactly as required.

We offer:

- Product platforms that can be scaled to accommodate new features and technologies.
- Form-factor sizing for different applications to reduce material waste.
- Flexible mounting options to support a wide range of installation requirements.

Pillar 3

Serviceable

Designed with longevity and maintainability in mind.

All our products are:

- Upgradeable, allowing components to be replaced or enhanced as technology evolves.
- Simple in design to support efficient servicing and maintenance.
- Designed to provide easy access to internal components.
- Supported with readily available spare parts to enable repair and long-term product life.

Pillar 4

Separable

Supporting circular design and responsible material recovery.

All our products are:

- Designed with environmentally responsible materials.
- Fully recyclable at end of life.
- Easy to disassemble, allowing materials and components to be separated efficiently for recycling and recovery.





Circular economy

TM66

Holophane's commitment to sustainable product design is supported by independent assessment through the CIBSE TM66 circular economy framework.

Developed by the Chartered Institution of Building Services Engineers (CIBSE) and supported by the Lighting Industry Association (LIA), TM66 provides a recognised methodology for assessing circular product design in the lighting industry.

Traditional manufacturing models follow a linear process, where raw materials are extracted, used to produce products and ultimately discarded once they reach the end of their life. Circular design takes a different approach, focusing on reducing waste, extending product lifecycles and enabling materials to be reused or recovered.

TM66 helps us design luminaires that reduce waste, maximise value and improve maintainability, ensuring products can be repaired, reused and recycled at the end of their lifecycle.

TM66 Circular Economy Assessment Method (CEAM)

Using the TM66 CEAM assessment, luminaires are rated for circularity on a scale between 0.0 and 4.0.

Holophane aims to ensure its products achieve excellent circularity scores between 2.5 and 4.0, supporting longer product lifecycles and responsible material recovery.

To ensure the credibility, objectivity and consistency of our own ratings, our products are independently tested and verified through the Lighting Industry Association (LIA) Assured Scheme.

2.5 > 4.0	Excellent circularity
1.5 > 2.5	Definite/substantial progress to circularity
0.5 > 1.5	Some circular economy functionality
0 > 0.5	Very poor circular economy performance

pebble™

Pebble brings together design, comfort, and performance to support safer, more welcoming outdoor environments.

Shaping light for people and place

If you would like to discuss your next project, our team is here to help.

Holophane Europe Ltd.
Bond Avenue, Bletchley,
Milton Keynes, Bucks, MK1 1JG

01908 649292
info@holophane.co.uk
holophane.co.uk

HOL-BRO-PEB-UK-10/26

GOLD GROUP MEMBER

theLIA