



D-Series



D-SERIES

The modern styling of the **D-Series** is striking yet unobtrusive - making a bold, progressive statement as it blends seamlessly with its environment. **D-Series** takes all the benefits of LED technology and moulds it into a high performance, high efficacy and long life area lighting luminaire.

With its exceptional 'finned' thermal management system, **D-Series** is capable of delivering over 100,000 hours LED module life. Offering a wide range of lumen packages and optical distributions, **D-Series** delivers optimised lighting application designs.

With the integrated ZD4i compatibility **D-Series** delivers a controllable luminaire that helps you realise energy consumption goals and demonstrate environmental responsibility. With its unique optics placed below each LED it ensures light is delivered where it needs to be, providing a uniform Nighttime Friendly environment with minimal light pollution.

Applications

- Amenity Areas
- Car Parks
- Retail Parks
- Truck Yards
- Warehousing
- Exterior Areas

Optics / Light Source

- Lumen packages ranging from 2,000 - 50,000 in 3 different luminaire variants
- Fully soak tested light engines ensuring LED reliability and eliminating early failures.
- 2700K/3000K/4000K colour temperature.
- RA 70.

TM66 CEAM-Make Rating

Rating: 2.6 Excellent Circularity.



Approvals

Complies with EN60598



IP IP65 luminaire and LED optic

Ta -40°C to +40°C

DSX1



For further information please visit the Holophane website www.holophane.co.uk

AN ENVIABLE REPUTATION THROUGHOUT THE WORLD



When Holophane was founded in 1896 in London, headed by Pelham Trotter, it marked the start of an incredible history that has now seen Holophane become a global business revered throughout the world for its expertise, quality, innovation and excellence in lighting.

Holophane’s first product was the famous patented globe in ‘white’ or ‘rose crystal’ that sold for around 2 shilling (10p). Today, Holophane continues this proud tradition with our values deeply rooted in the dedication to creating luminaires, with exceptional lighting performance, innovative patented technologies, and delivering added customer value beyond illumination.

What does it mean for our customers?

A Trusted & Reliable UK Manufacturer

From Royalty all the way to small residential projects, Holophane has been a trusted manufacturer over the decades for all manner of projects. You can be sure you are in good hands and can rely on the collective knowledge and expertise we have gathered since our inception in 1896.

Development of Innovative Products

As part of our design philosophy, Holophane are always trying to push boundaries in the development of unique product innovations. As such many of our luminaires hold UK and International design patents.



Products That Deliver Added Value

In today’s world, sustainability and added value are becoming increasingly important. As such our products and solutions go further than just lighting. Many of our innovations include integrated smart connected solutions to help customers achieve further energy savings and can also enable remote monitoring.

Delivering excellent customer service

Over our 125-year history we have always been committed to delivering the best service to our customers and supporting in a myriad of ways to ensure the best possible outcomes. This goes as far as offering a free lighting design service to one-off products/ solutions to meet customers unique needs.

THE D-SERIES RANGE 3 LUMINAIRES, ONE COMPLETE PROJECT SOLUTION

The **D-Series** range has been designed not only for super optical quality and performance but also to have a cohesive family aesthetic.

Available in 3 luminaire sizes, the D-Series range offers a full outdoor lighting solution for any environment.



DSX2

30,000 - 50,000 lumens
8m mounting heights and above

DSX1

22,000 - 36,000 lumens
between 6m and 10m mounting heights

DSX0

2,000 to 22,000 lumens
up to 6m mounting heights

PRODUCT FEATURES

Enhanced Performance

The **D-Series** range features the very latest LED technologies. In conjunction with silicone optics this delivers the best lighting performance coupled with low-energy consumption and high efficacy. This also means D-Series meets BREEAM compliance.

Class leading optics

The **D-Series** range has the flexibility of 4 optimised optical distributions. Through using individual bubble optics per LED D-Series controls the light exactly where it's needed. This results in a luminaire that provides best in class spacings and uniformity.

Easy maintenance


The **D-Series** range has an easily accessible gear compartment ensuring fast and simple component changes if required.



D-SERIES



DSX1

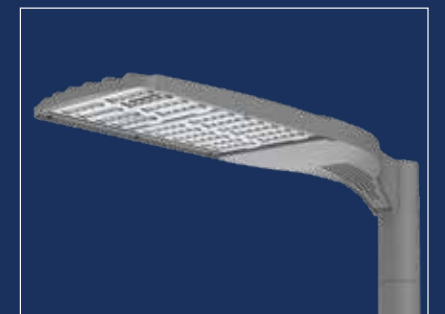

DSX2

Connected

The **D-Series** range is ZD4i compatible when specified with the 4-pin Zhaga socket options (TZ01 or TZ02) enabling a future proof luminaire that can be used in conjunction with Controlux Air or a expanding ecosystem of third party devices and sensors.

Note: Post Top Bracket for The D-Series range is sold separately. Please enquire with your Holophane representative for the full range of mounting options.

DSX0



THERMAL MANAGEMENT

The reliability and performance of an LED luminaire is dependent on a combination of factors. Keeping the temperature of the drivers, LEDs and electronic components as low as possible is critical to maintaining the luminaire's efficiency.

One of Holophane's key luminaire design principles is effective thermal management. The **D-Series** family is designed to utilise all three principles of heat transfer: conduction, convection and radiation.



Conduction

Taking heat away from electronic components, LEDs and drivers.

The **D-Series** range is designed with LEDs and drivers mounted to thermally efficient surfaces, promoting the effective transfer of heat away from these critical components.



Convection

From luminaire heat sink chassis and LED module to ambient air.

The **D-Series** range is designed to have drivers and LEDs that are mounted separately to avoid compound heating of components. This ensures critical components are kept as cool as possible to ensure long system life.



Radiation

Surface finish and form designed to maximise heat radiation.

The **D-Series** range incorporates a large finned casting design which increases the total surface area of the luminaire and in turn helps to promote cooling through radiation.

THERMAL MANAGEMENT

DSX1




SPECIFICATION

Specification

Single-piece die-cast aluminium housing, that conforms to EN1706 AC-46500, with integral heat sink fins to optimise thermal management through conductive cooling. LED modules are IP65 with individual lenses, and high grade aluminium housing to transfer heat away from the LEDs and dissipate through the finned housing for cooling. The LED driver is mounted in direct contact with the finned housing for cooling to promote low operating temperature and long system life. Housing is completely sealed against moisture and environmental contaminants (IP65). Installation is via the integrated mounting block and integral arm that facilitate a quick and easy installation. 3000K or warmer must be selected for IDA dark sky certification.

Light Distributions

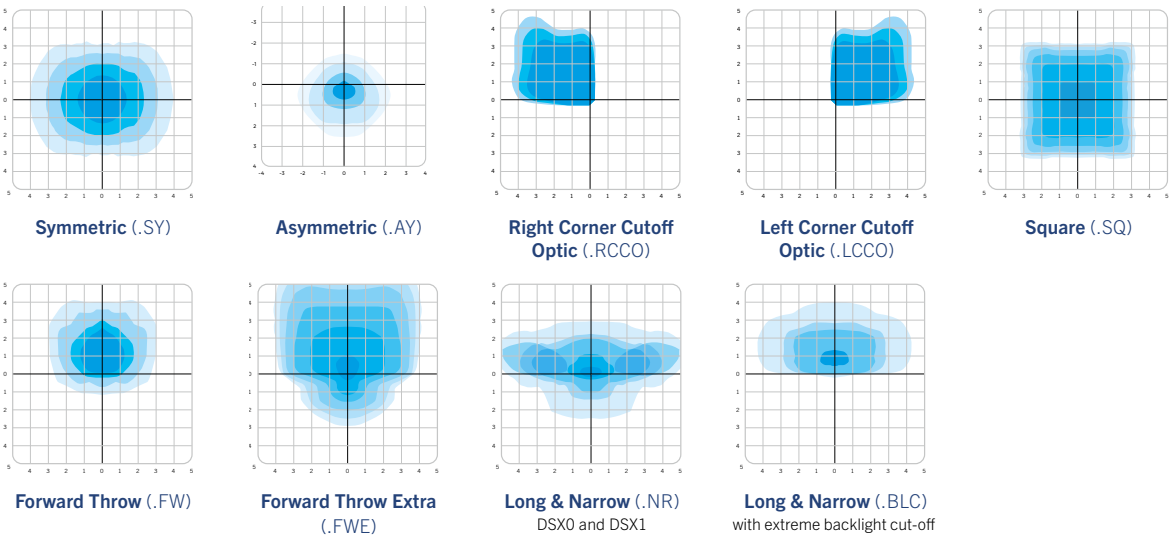

SPECIFICATION

Features and benefits

System Longevity

- The D-Series's diecast aluminium housing acts as its primary heat sink. Its longitudinal fins employ conductive cooling techniques to dissipate heat away from the key LED components and driver that extends the life of the luminaire.
- Light engine(s) consist of either 20 or 30 high efficacy LEDs (subject to chosen configuration) mounted to a metal-core circuit board to maximize heat dissipation and promote long life.

Exceptional Performance

- Offering six lumen packages ranging from 2000 lm to 50,000 lm with efficiencies of up to 143 lpw (Lumens Per Watts).

- Four optimised distributions (Symmetric, asymmetric, forward throw and long and narrow) delivered by quality LEDs and bespoke UV stabilised optics.
- LED light engines with 0% ULOR ensuring night time friendly.

Complete Light Package

- Available with ZD4i compatibility for use with range of 3rd-party sensors and devices.
- Fully integrated into Holophane standard column range.

DIMENSIONS & PERFORMANCE

Typical luminaire performance

Configuration	Delivered Lumens	Circuit Power (W)	Driver output current (mA)	Luminaire total number of LEDs	Luminaire efficacy (lm/W)
DSX0.4.LA02X	2,000	14	203	20	143
DSX0.4.LA03X	3,000	20	309	20	150
DSX0.4.LA04X	4,000	27	419	20	148
DSX0.4.LA05X	5,000	34	534	20	147
DSX0.4.LA06X	6,000	40	653	20	150
DSX0.4.LA08X	8,000	56	906	20	143
DSX0.4.LA10X	10,000	68	1181**	20	147
DSX0.4.LA11X	11,000	75	609	40	147
DSX0.4.LA13X	13,000	90	733	40	144
DSX0.4.LA15X	15,000	106	864	40	142
DSX0.4.LA16X	16,000	114	932	40	140
DSX0.4.LA18X	18,000	130	1050	40	138
DSX0.4.LA22X	22,000	169	1385	40	130
DSX1.4.LA22X	22,000	145	799	60	152
DSX1.4.LA30X	30,000	213	1150	60	141
DSX1.4.LA36X	36,000	256	1400	60	128
DSX2.4.LA30X	30,000	202	838	80	149
DSX2.4.LA36X	36,000	239	781	100	151
DSX2.4.LA40X	40,000	268	883	100	149
DSX2.4.LA45X	45,000	310	1016	100	145
DSX2.4.LA50X	50,000	351	1157	100	142

Weight (with control gear)

DSX 0	8.0 kg
DSX 1	12.2 kg
DSX 2	15.0 kg

Windage (effective projected area)

DSX 0	0.09 m²
DSX 1	0.09 m²
DSX 2	0.10 m²

TA


-40°C to 40°C

X - Denotes colour temperature (replace X with 2 for 2700K, 3 for 3000K and 4 for 4000K)

Note: Data is correct at time of print.
* For other life metric data in line with IEC PAS62722-2-1 and 62717 contact your Holophane Representative for details.



dimensions in mm

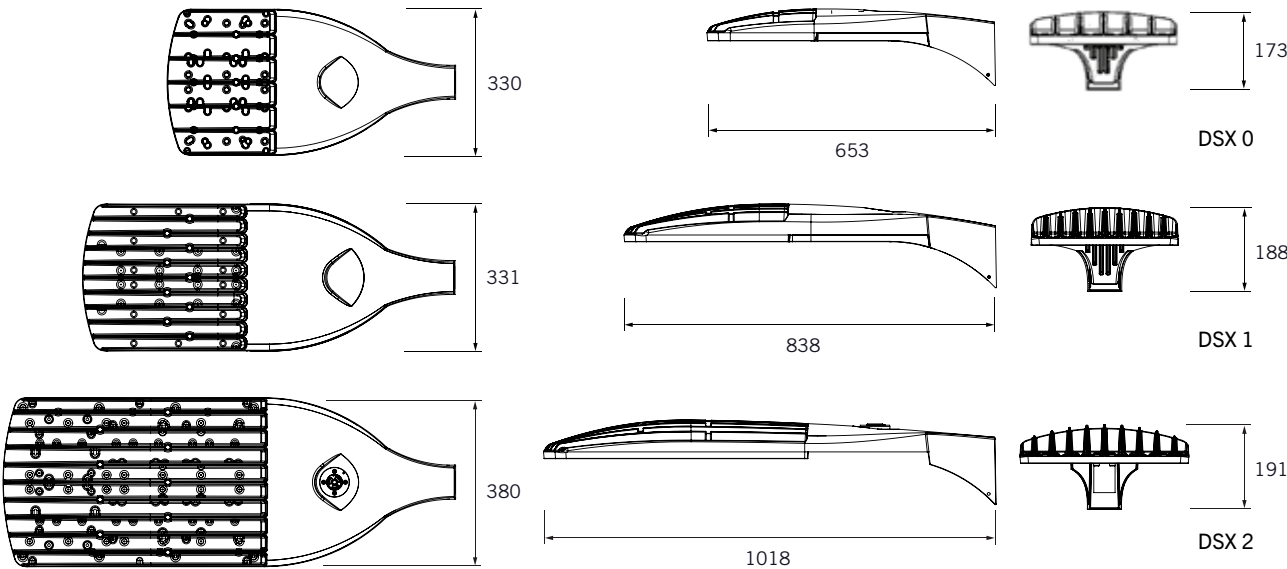

LIGHTING WHERE YOU NEED IT... NOT WHERE YOU DON'T

Addressing unwanted spill light along the perimeter of your outdoor lighting design is no easy task. Whether you are trying to limit the light trespass due to concern for neighbouring properties, or simply seeking to achieve the most optimised lighting design, you need the most stringent light control available.

The D-Series Extreme Cutoff Optics, with its industry-leading optics addresses light trespass using innovative backlight control, delivering outstanding performance, long life and energy efficiency. This is accomplished through the use of specialised point-source black light engines, integrated specular reflectors with optimised optics and dedicated light-absorbing backlight shields to provide maximum control for backlight while providing superior lighting levels and luminaire efficiency.

INNOVATIVE OPTICS THAT SUPPORT YOUR DESIGN

Specialised, Black D-Series Light Engines

The stray-light absorbing light engines remove light scattered during refraction, ensuring light is directed exactly where it is needed - virtually eliminating spill light.



Integrated Shield

The integrated shield design virtually eliminates light trespass, reduces glare, and maximises forward-reflected light, while maintaining high luminaire efficiency.



DSX0



DSX1



DSX2


INNOVATION IN ACTION

Dedicated Backlight Control

The BLC optic enables significant backlight control, projecting light directly to the front and side of the task area while having as little as 0.5% of total backlight beyond the boundary line or column placement. This optic allows for optimal backlighting results when used on paths, curbs and parameter edging where backlight is not required. This is accomplished using a specialised

point-source black light engine with integral reflectors, optimised optics and light-absorbing backlight shields, providing superior lighting levels and luminaire efficiency. LEDs also can't be seen from the rear, which helps reduce glare when looking at the fitting from behind.

- Curb Line**
- Property Line**
Virtually all light is cutoff right at that property line.
- Boundary Line**

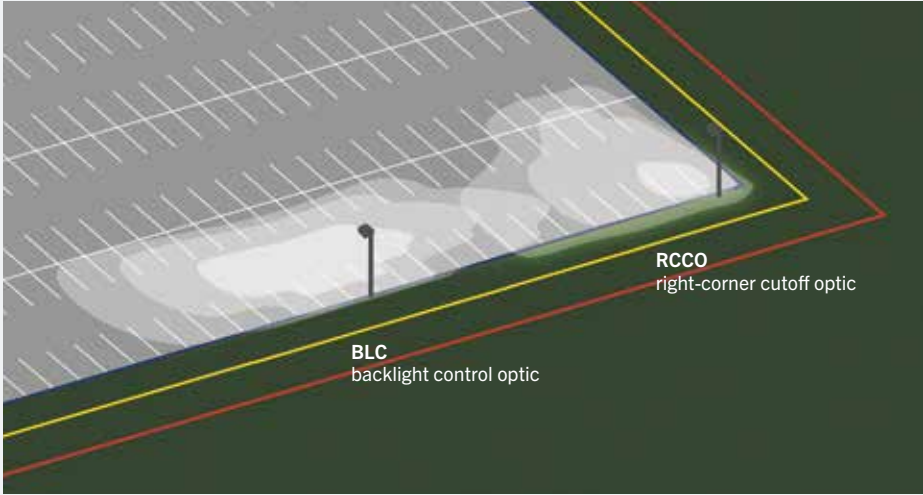

Corner Cutoff Control

The RCCO (right-corner cutoff optic) and LCCO (left-corner cutoff optic) apply the same principles as the BLC optic. However, this optical distribution caters to aiding perimeter lighting control to the corners of parking lots and other outside areas. The image above illustrates this optic working in harmony with the BLC optic to provide unmatched perimeter lighting while

maintaining light levels that offer high visibility to the target area. The image further illustrates how sharp the cutoff is of the light. Allowing for projects to have a column mounted in the corner without any light spill going to one side. This helps support compliance with intrusive light requirements along the perimeter area while the target area remains illuminated.

DSX2



Code	Luminaire (required)							
DSX0	D-Series 0 Luminaire							
Code	Lamp Type (required)							
.LA02X	LED light engine producing c.2,000 lm		Replace 'X' in lamp type code with either: 2 for 2700K 3 for 3000K 4 for 4000K					
.LA03X	LED light engine producing c.3,000 lm							
.LA04X	LED light engine producing c.4,000 lm							
.LA05X	LED light engine producing c.5,000 lm							
.LA06X	LED light engine producing c.6,000 lm							
.LA08X	LED light engine producing c.8,000 lm							
.LA10X ¹	LED light engine producing c.10,000 lm							
.LA11X	LED light engine producing c.11,000 lm		¹ TZ01, TZ02 & TZ03					
.LA13X	LED light engine producing c.13,000 lm		Not available with lumen codes					
.LA15X	LED light engine producing c.15,000 lm		LA10X and LA22X					
.LA16X	LED light engine producing c.16,000 lm							
.LA18X	LED light engine producing c.18,000 lm							
.LA22X ¹	LED light engine producing c.22,000 lm							
Code	Distribution (required)							
.SY	Symmetric light distribution							
.AY	Asymmetric light distribution							
.FW	Forward Throw distribution							
.NR	Long and Narrow distribution							
.BLC	Long and Narrow distribution with extreme backlight cut-off							
.RCCO	Right Corner Cutoff							
.LCCO	Left Corner Cutoff							
.FWE	Forward Throw Extra							
.SQ	Square light distribution							
Code	Colour (required)							
.C1	Smooth White (RAL9016)							
.C4	Graphite (RAL 7011)							
.C6	Smooth Grey (RAL7035)							
.C7	Black (RAL9005)							
.C9	Metallic Silver (RAL9006)							
.RAL****	RAL Colour (Customer choice)							
Code	Voltage Electrical Class (option)							
.CII	Class II							
Code	Photocell (option)							
.TSZ	Complete with miniature 70 lux factory fitted photocell. (Zodion SS12)							
.T1	Complete with NEMA socket. (To accept standard NEMA Photocell, available from Holophane).							
.T7	Complete with 7-pin dimming NEMA ANSI C136.41 socket (photocell/node supplied by others) without locking top							
.T7T	Complete with 7-pin dimming NEMA ANSI C136.41 socket (photocell/node supplied by others) with weather proof locking top							
.TZ01	Complete with 4-Pin Zhaga Socket - 'Top' (suitable photocell/node supplied by others) with weather proof locking cap							
.TZ02	Complete with 4-Pin Zhaga Socket - 'Bottom' (suitable photocell/node supplied by others) with weather proof locking cap							
.TZ03	Complete with 4-Pin Zhaga Socket - 'Top & bottom' (suitable photocell/node supplied by others) with weather proof locking cap							
Code	Controls (option)							
.H1S	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with Photocell light sensor. Suitable for luminaires with TZ01 or TZ03. Wireless range 30 metres in line of sight.							
.H1P	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with PIR sensor for mounting heights of up to 12m - Conical detection zone. Suitable for luminaires with TZ02 & TZ03. Wireless range 60 metres in line of sight.							
Code	Control Gear (option)							
.CL7	Programmed to deliver 70% of the initial lumens over the life of the luminaire							
.CL8	Programmed to deliver 80% of the initial lumens over the life of the luminaire							
.CL9	Programmed to deliver 90% of the initial lumens over the life of the luminaire							
.CL****	Customer specified programming							
Code	Dimming outputs (option)							
.LRD	DALI							
.LRT56	pre-set to dim to 50% between 12am to 6am							
.LRT66	pre-set to dim to 60% between 12am to 6am							
.LRT76	pre-set to dim to 70% between 12am to 6am							
.LRT*****	Customer specified pre-set dimming							
Code	Paint finish (option)							
.C	Enhanced Paint Finish							
DSX0	.LA02X	.AY	.C7	.CII	.TSZ	.H1S	.LRD	.C
Example								

Note: The specifications of the Holophone luminaire, all descriptions, illustrations, drawings and specifications in the Holophone catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement.

Code	Luminaire (required)							
DSX1	D-Series 1 Luminaire							
DSX2	D-Series 2 Luminaire							
Lamp Type (required)								
.LA22X*	LED light engine producing c 22,000 lumens							
.LA30X+	LED light engine producing c 30,000 lumens							With a nominal 3000K or 4000K colour temperature. Replace X with 2 for 2700K, 3 for 3000K, 4 for 4000K TZ01, TZ02 & TZ03 Not available with lumen codes LA30X & LA36X when configured with DSX1. Also not available with lumen codes LA45X and LA50X
.LA36X**	LED light engine producing c 36,000 lumens							
.LA40X+	LED light engine producing c 36,000 lumens							
.LA45X**	LED light engine producing c 45,000 lumens							
.LA50X**	LED light engine producing c 50,000 lumens							
Code Distribution (required)								
.AY	Asymmetric							
.SY	Symmetric							
.FW	Forward throw							
.BLC	Long and Narrow distribution with extreme backlight cut-off							
.NR	Long and Narrow distribution							
.RCCO	Right Corner Cutoff							
.LCCO	Left Corner Cutoff							
.FWE	Forward Throw Extra							
.SQ	Square light distribution							
Code Colour (required)								
.C1	Smooth White (RAL9016)							
.C4	Graphite (RAL 7011)							
.C6	Smooth Grey (RAL7035)							
.C7	Black (RAL9005)							
.C9	Metallic Silver (RAL9006)							
.RAL****	RAL Colour (Customer choice)							
Code Photocell (option)								
.T	Mini Photocell							
.T1	Complete with NEMA socket (To accept standard NEMA Photocell, available from Holophane)							
.T7	Complete with 7-pin dimming NEMA ANSI C136.41 socket (suitable photocell/node supplied by others) without locking top							
.T7T	Complete with 7-pin dimming NEMA ANSI C136.41 socket (photocell/node supplied by others) with weather proof locking top							
.TZ01	Complete with 4-Pin Zhaga Socket - Top (suitable photocell/node supplied by others) with weather proof locking top [†]							
.TZ02	Complete with 4-Pin Zhaga Socket - Bottom (suitable node/presence detector supplied by others) with weather proof locking top [†]							
.TZ03	Complete with 4-Pin Zhaga Socket - 'Top & bottom' (suitable photocell/node supplied by others) with weather proof locking cap.							
Code Control Gear (option)								
.CL7	Programmed to deliver 70% of the initial lumens over the life of the luminaire							
.CL8	Programmed to deliver 80% of the initial lumens over the life of the luminaire							
.CL9	Programmed to deliver 90% of the initial lumens over the life of the luminaire							
.CL****	Customer specified programming							
Code Controls (option)								
.H1S	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with Photocell light sensor. Suitable for luminaires with TZ01 or TZ03. Wireless range 30 metres in line of sight.							
.H1P	HOLOSOne Bluetooth NLC exterior 4-pin Zhaga node with PIR sensor for mounting heights of up to 12m - Conical detection zone. Suitable for luminaires with TZ02 & TZ03. Wireless range 60 metres in line of sight.							
Code Dimming outputs (option)								
.LRD	DALI							
.LRT56	Pre-set to dim to 50% between 12am to 6am							
.LRT66	Pre-set to dim to 60% between 12am to 6am							
.LRT76	Pre-set to dim to 70% between 12am to 6am							
Code Paint finish (option)								
.C	Enhanced Paint Finish							
DSX1	.LA30X	.AY	.C7	.T1	.CL7	.H1S	.LRT56	.C
Example								

*DSX1 only +DSX1 & 2 **DSX2 only

Lumen data is considered to be representative of the configuration shown, and may vary, with a tolerance on flux of +/- 7% (typical of LED manufacturers data) and luminaire power of +/- 5%.

Note: The specifications of the Holophone luminaire, all descriptions, illustrations, drawings and specifications in the Holophone catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement.

SUSTAINABILITY ENVIRONMENTAL



AN ECO DESIGN THAT IS SUSTAINABLE WITHIN.

Our products are just one part of our sustainability efforts, with the 4 pillars of our eco-design which constantly push us to create the most sustainable products that reduce our own environmental impact.

Pillar One Sustainable we make more with less

How are we doing it?

- To make use of recycled materials where we can
- Reducing unnecessary materials, weight and component count
- Only using components that can be used in other luminaires
- Reduce labour time and energy usage during the manufacturing process

Pillar Three Serviceable we ensure product longevity

All of our products are:

- Upgradable
- Simple in design
- Ensure easy access to internal components
- Spares are easily available to enable customer servicing and repair

Pillar Two Scalable we tailor the product for application

We offer:

- Products that are scalable to accommodate new features
- Form-factor sizing for each application to help reduce material waste
- Flexible mounting options



For information on our EarthLIGHT initiative please scan the QR code

Pillar Four Separable we are committed to global sustainability

Our products are:

- Environmentally friendly
- Recyclable
- Easy to disassemble, making materials used easy to separate



CIRCULAR ECONOMY TM66

Holophane's ambitious sustainability efforts have set us on the path to obtaining several accreditations with the LIA and CIBSE's TM66 which allows us to rate our products and follow a method that designs out waste.

The traditional resource consumption model is linear, where raw material is collected to make products, then often thrown away once they have served their purpose.

CIBSE's TM66 allows us to rate our products and follow a method to design out waste, maximise value and improve maintenance so that our luminaires can be repaired, recycled and re-used.



2.5 to 4.0	Excellent circularity
1.5 to 2.5	Definite/substantial progress to circularity
0.5 to 1.5	Some circular economy functionality
0 to 0.5	Very poor circular economy performance

One platform. Total visibility.

Unified control. Indoors and out.

HOLOSOne is Holophane’s intelligent wireless lighting controls platform that unifies lighting control across your entire site. From production halls and warehouses to access roads and yards, it provides complete visibility and control—indoors and out.

Trusted technology. Proven performance.

Built on secure Silvair Bluetooth NLC Mesh and backed by over 125 years of lighting expertise, HOLOSOne delivers scalable performance and built-in sustainability—giving you control you can trust.

One open standard. Every space.

While traditional systems often separate interior and exterior zones, HOLOSOne simplifies everything with open-standard protocols and hardware designed for both indoor and outdoor applications—reducing complexity and future-proofing your infrastructure.

Scalable architecture. Simple to deploy.

The system can operate in standalone mesh mode, configured via a Bluetooth-enabled mobile device, or scale to a cloud-connected solution. With support for up to 200 devices per gateway, HOLOSOne offers real-time access to diagnostics, scheduling, and energy reports.

Gateway(s) required for remote access, automated diagnostics, energy reporting and heat map visualisation.

Smarter strategies. Lower emissions.

From daylight harvesting and occupancy sensing to emergency reporting, HOLOSOne puts every energy-saving strategy at your fingertips—designed to cut emissions and simplify lighting management.




Controlled Technology

Operating platforms.

Platform 1 (local system)

Platform 1 allows for **independent and localised lighting control**, ideal for when on-site management of your lighting system is essential and where the luminaires can be easily accessed for configuration.

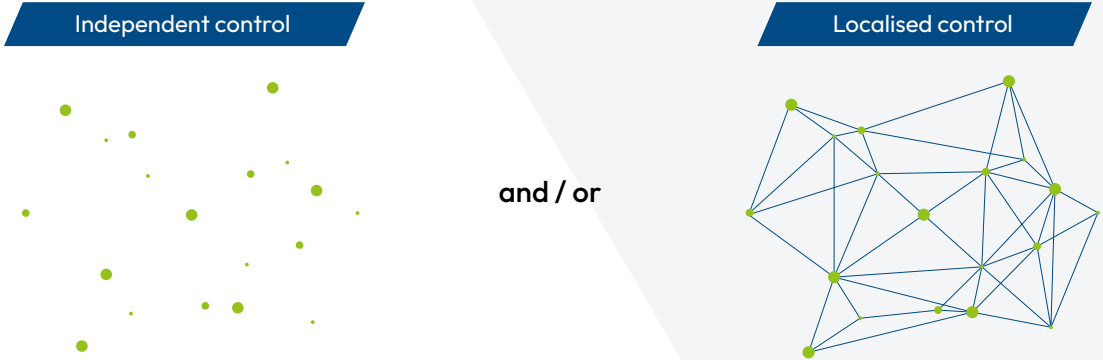

Platform 2 (remote system)

Platform 2 provides users with **more freedom to manage their sites remotely**, both on and off-site, without being within the range of the lighting network to configure changes. This is ideal for situations where monitoring multiple sites from a central location is crucial and updates can be applied to all devices remotely.



Features	Platform 1 (local system)	Platform 2 (remote system)
PIR occupancy and vacancy sensing	✓	✓
Daylight harvesting	✓	✓
Photocell control	✓	✓
Scene setting control	✓	✓
Lighting zones and zone linking	✓	✓
Local emergency scheduling and reporting	✓	✓
Time-based scheduling	✓	✓
Energy monitoring and reporting		✓
Occupancy heat map visualisation		✓
Remote emergency scheduling and reporting		✓
Gateway (subscription required)		✓



Scan to discover how
our service plans
keep your system
running at its best.

D-Series



Speak to the Holophane experts today

Get in touch to discover how, together, we can ensure your lighting space works for you and the planet.

 Holophane Europe Ltd.
Bond Avenue, Bletchley,
Milton Keynes, Bucks, MK1 1JG

 01908 649292
 info@holophane.co.uk
 holophane.co.uk

HOL-BRO-DPL-UK-07/26



theLIA