
HOLOPHANE®



Prismpack™

MADE IN BRITAIN

Patent pending

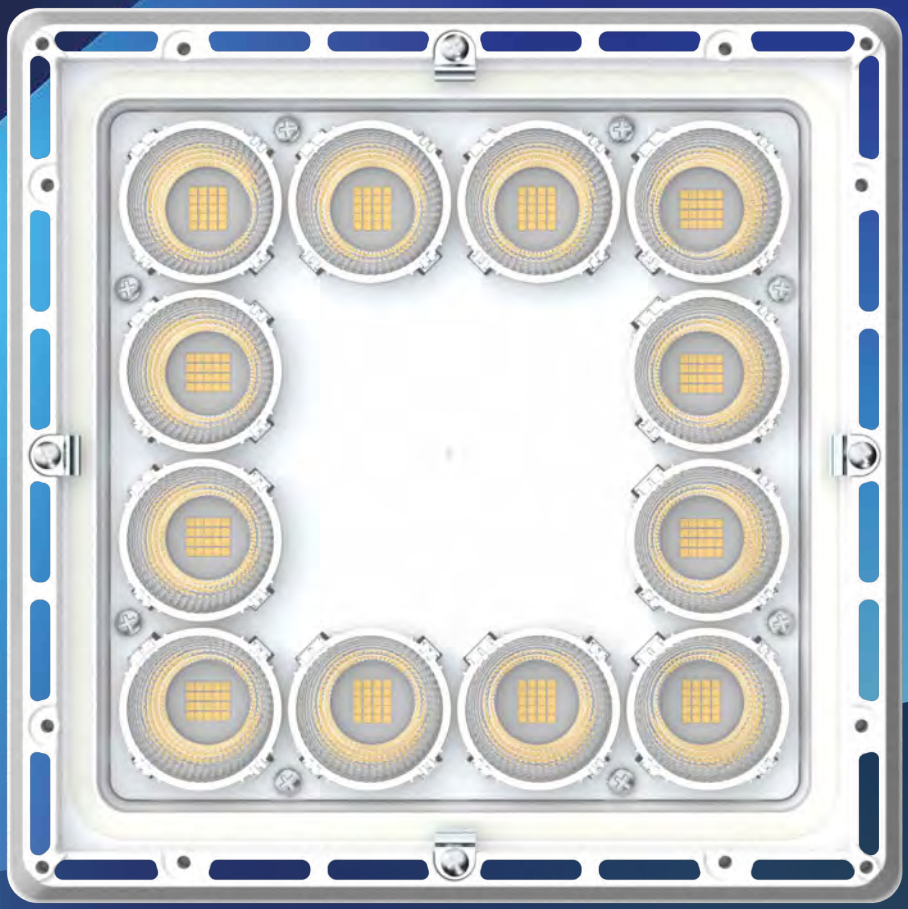

prismpack™

Inspired by our history, designed to be distinctively different and taking high bay lighting to new levels of lumen output with superior light control, the new **Prismpack**™ combines the latest in highly efficient LEDs and redefines the standard for digital high-bay lighting. The new generation Prismpack delivers solutions that can be totally tailored to specific customer applications.

For over 130 years Holophane has enjoyed an enviable reputation throughout the world for expertise, quality and innovation in Lighting. From the earliest days, when the company pioneered its famous glass refractor, the Holophane name has been ever present as a leader in the field of luminaire and lighting design. **Prismpack** is a continuation of this proud tradition and builds on our heritage of designing highbay luminaires with exceptional optical performance and thermal management which fused together deliver a solution that is scalable, flexible and fully serviceable.

LUX AWARDS 2020 SHORTLISTED

EDISON AWARDS 2022 NOMINEE

Applications

- Heavy Industry
- Factories
- Production
- Manufacturing
- Foundries
- Warehouses
- Assembly Areas
- Exhibition Halls
- Sports Halls

Overview

- Available with lumen ranges from 10,000 to 120,000 (delivered lumens).
- Three distribution options (Narrow, Medium and Wide)
- 4000K, 5000K & 6500K options available.
- CRI > 80.
- Efficacies of up to 150lpw.
- Available with integrated control and emergency options (c.1,000lm in emergency mode).
- System Life – 100,000 Hrs at 45°C
- System Life – 50,000 Hrs at 70°C (High Ambient Version)
- Available with a polycarbonate lens or prismatic glass lens

Approvals

Complies with EN60598

CE | UKCA Patent pending

DIN 18032-3/DIN EN 13964 (with .WG option)

IP65

-25˚C to 70˚C*

*Max lumen output of 60,000 at TA of 50˚C to 70˚C

MADE IN BRITAIN

For further information please visit the Holophane website **www.holophane.co.uk**

Modular Design
Optical Performance
Thermal Excellence

High bay Prismpack™





High bay
Prismpack™

Specification

An industrial high-bay luminaire with a thermally separate, but coupled, two-compartment construction. This allows the luminaire to operate in ambient temperatures of up to 70°C. Prismpack can provide the ideal solution for almost all demanding industrial applications.

The marine grade aluminium construction with perimeter vertical ventilation allows for exceptional thermal management of both the LEDs and the drivers.

Building on Holophane's heritage of optical design, the optical system has been developed for mounting heights of up to 25m and over using a bespoke, specular aluminium, facetted reflector system contained within a highly transmissive clear glass lens. A prismatic glass refractor is also available.

The all-aluminium gear compartment consists of a snap-fit cover for quick access to the electrical components including the LED drivers. This reduces and simplifies product maintenance. A wire-rope suspension kit is available separately.

Note: as standard Primspack is supplied with zinc plated brackets. With the .SB, Prismpack can be supplied with Stainless Steel 316 brackets.

Features and benefits

Scalable System

- Lumen ranges from 10,000 to 120,000 achieved via five system sizes which deliver exceptional ROI for a multitude of applications.
- Mounting options to accommodate a variety of onsite installation challenges.

Exceptional Optical Performance

- Incorporates PrismaLED technology which delivers a wholly luminous lit effect that accurately controls the output of the LEDs and reduces glare.
- Optimax,™ inspired by Holophane's Superglass optical technology, maximises performance with today's digital technologies. Optimax is designed to deliver a low glare, visually comfortable, efficient lighting system.

Enhanced Lumen Maintenance

- Vertical ventilation slots in the luminaire heat-sink convect heat from the housing and creates air movement away from the glass optic to minimise dirt accumulation on the optical surface.
- The glass lens ensures a low electrostatic charge which make it less susceptible to dust and dirt accumulation so improving dirt depreciation over time. This means that higher value Maintenance Factors, MF, can be used in design calculations.

Flexibility

- Suitable for ambient temperatures of up to 70˚C enabling the luminaire to be used in various environments.

Fully Controllable

- Integrated Control and emergency options.
- Compatible with HOLOSOne, HOLOSAir and HOLOS Wired.

Optimax Low glare



Optimax™ explained

Holophane's new Optimax™ reflector technology draws on generations of optical expertise to deliver market leading performance and quality of light from an industrial high bay. The modular facetted reflector technology is designed to give precise optical control and deliver the potential for an extensive choice of lighting distributions available to tailor your lighting design to the geometry of the building structure. Light is precisely controlled for optimum efficiency. The deep shielding of the light source reduces glare from the LEDs. This combined with a low reflector wall brightness, ensures maximum visual comfort.

Prismpack provides flexibility in the design process. Many different lumen packages combined with spacing to height ratios (SHR) from 0.5:1 to 1.6:1 (narrow, medium and wide distributions) allow the designer to tailor the lighting needs to fit the shape of the building exactly. This increases light utilisation and improves the efficacy still further.

Low Glare – Visual Comfort


The unique Optimax design dramatically reduces the apparent brightness of the Prismpack when compared with other high output high bays. Light emitted from the LEDs is spread over each Optimax™ reflector which in turn builds up in a modular structure allowing the light to be spread over the optical surface and reducing multiple point sources and producing a visually comfortable appearance.

Highest Quality Product

The quality of the Prismpack luminaire is self-evident. The reduced cost of overall installation for Prismpack lighting design which in turn reduces installation costs of switch gear, cables, trunking when compared to a regular LED high bay solution.



Bespoke optical structures created to maximise the performance from LED technology whilst delivering total lighting control.

Narrow 0.5:1 SHR	**Medium** 1:1 SHR	**Wide** 1.6:1 SHR
		
		



Prismaled story

Holophane's history lies in it being the first company to give practical application to the principles of the prism as the ultimate means of light control, harnessing and redirecting the output of light source by prismatic means to provide the best in cost effective, efficient lighting. Over 120 years ago Holophane sold the first patented light diffusing globe using borosilicate glass.

Today these principles remain core to Holophane's products and technologies, culminating in our PrismaLED technology. Holophane products featuring PrismaLED technology deliver the following benefits:

Volumetric Illumination

'Volumetric illumination' delivers an optimal mix of light to walls, partitions, vertical and horizontal work surfaces. This results in reduced shadow and increased perceived volume of space. Studies have indicated that increased lighting levels in horizontal and vertical illuminance increase the productivity up to 5.7%*.

Reduces Glare

Without a lens, LEDs can cause discomfort glare when viewed from certain angles. The PrismaLED prismatic lens reduces glare by increasing the luminated surface area of the fitting thus, providing a more attractive and comfortable lighting environment.

Maximises Colour Consistency

Over time, LEDs can discolour and fade, which leads to an inconsistent colour of light. The PrismaLED lens distributes the light from individual LEDs so that any colour change is consistent.

Minimises LED Failure effect

When using either a clear glass or plastic lens, individual LED failures can result in black spots in the light distribution. With a PrismaLED prismatic lens, the effect of a failed LED is greatly reduced, resulting in a more uniform appearance.

Provides superior optical control

Standard lenses can create an uneven and poor distribution in lighting environments. PrismaLED optics have superior control over the light output, resulting in a more uniform distribution.



Representation of a sample industrial building with objects, using direct light high bay luminaires.



Representation of the same scene using luminaires with PrismaLED technology.

**Source: Mack trucks, Pa. USA, EC&M



Why glass?

Holophane has chosen to focus its R&D energy to deliver two glass lens options (clear or prismatic), which not only protects the reflectors and LEDs, but also delivers a number of benefits to you, the customer.

Glass is actually a very difficult material to work with in manufacturing, but we have chosen to invest heavily in this material because it has great economic advantages in application. Here are just a few of these advantages:

Thermal shock

Glass shows very low thermal expansion or contraction and this means better sealing of joints due to less movement.

UV impervious

Sunlight, daylight and LED radiation do not affect glass. There is no change with prolonged exposure to sunlight, ultra violet or infrared radiation.

Longevity

Doesn't degrade over time!

Temperature resistance

Glass comfortably resists any temperatures reached inside or outside luminaires.

Chemical resistance

Glass is unaffected by just about any chemical found in industrial applications.

Low dirt accumulation

Glass doesn't build electrostatic charge unlike metals and plastics.

Recyclable

Made from recyclable glass.

Thermal management


The reliability and performance of an LED luminaire is dependent on a combination of factors. Keeping the Tc point (the Tc is the hottest part of an electrical component) of the control gear, LEDs etc as low as possible is critical to maintaining the luminaire's efficiency.

The selection of quality materials used in components such as the gear and optical housings is equally as critical in ensuring that the heat generated by the electrical components is thermally managed.

Prismpack utilises all three heat transfer principles of conduction, convection and radiation. This ensures that the LEDs mounted to the aluminium backed PCB and the electronic drivers are thermally managed well within their limit to maximise system life. The drivers are mounted within their own, thermally decoupled, housing away from the LEDs to ensure that heat generated by each individual electronic component does not adversely affect the other.


Conduction

Taking heat away from electronic components, LEDs and drivers.

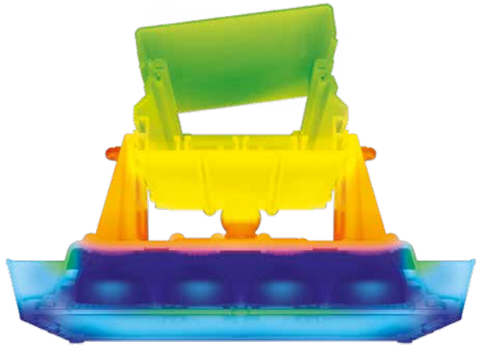

Convection

From luminaire heat sink chassis and driver housing to ambient air.

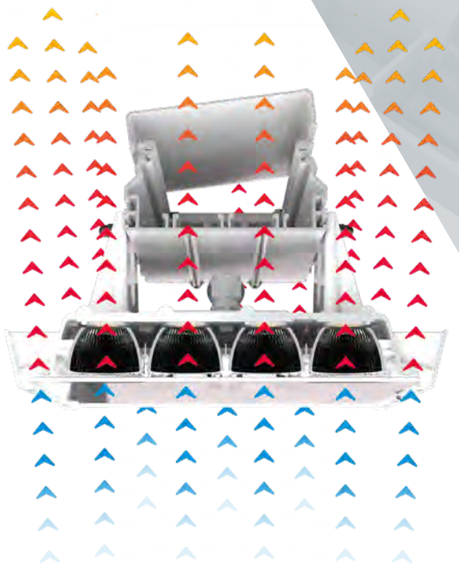


Radiation

Surface finish and form designed to maximise heat radiation.

up to 70°C

Suitable for ambient temperatures of up to 70°C enabling the luminaire to be used in various environments.





Thermally balanced LED Module

Prismpack has been designed to operate in a thermal equilibrium. The LED clusters are placed at equal-distance from both the LED Module cooling vents and the adjacent LED clusters.

This ensures a minimal temperature variation across the LED population within the fitting giving the following:


- **Improved system reliability, minimising premature LED failures.**
- **LEDs degrade at equal rates, ensuring the validity of system life data.**

Modularity

Prismpack has a modular design that has been developed with an approach that subdivides the luminaire system into individual modules (LED) and gear housing that are fully scalable, maintainable and upgradeable.

Scalability


Prismpack is a fully scalable luminaire that has been developed around one LED module that has the capability to be used in an arrangement of 1 to 6 modules. This creates a luminaire that ensures visual and performance consistency with a lumen package from 10,000 to 120,000 thus enabling it to be used for all types of interior applications.




Up to 27,000 lumens



Up to 50,000 lumens

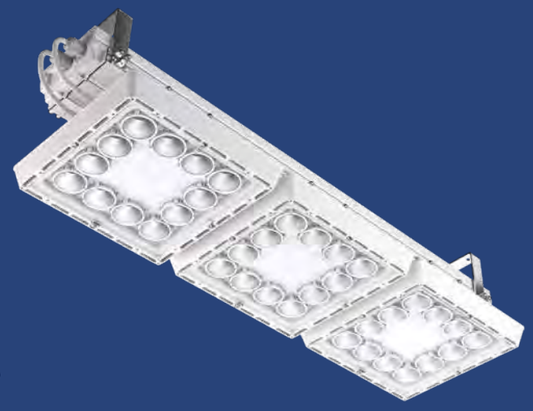

Up to 68,000 lumens

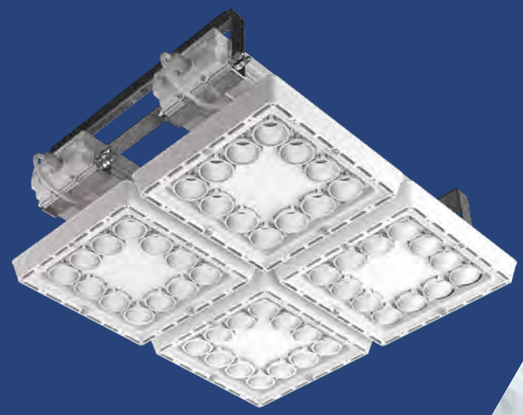

Up to 80,000 lumens



Over 100,000 lumens

Recommended mounting height range: 16m - 25m+

up to 150 lm/W

Across 1 to 6 module configurations

Modularity Scalability

Recommended mounting height range: 5m - 16m

Integrated Emergency Option

Prismpack has been designed with a class leading 1hr or 3hr integrated emergency that delivers c.1,000 lumens. Eliminating the need for additional emergency fittings within your installation.

Prismpack is alternatively available with an internal DC fuse that accepts 176-275V DC if used with a central battery system. In this configuration the luminaire will dim to 15% of output.



Emergency
c.1000
lumen
output





When in emergency mode only the first module in Prismpack will be powered.

Note: Emergency options are not available with LB27X8/LB54X8/LB81X8 lumen packages.

Serviceability

Serviceability is the ease with which a product can be maintained or serviced in order to isolate and replace any faulty components without having to replace the whole gear compartment or optical system.

With an easily removable gear cover, emergency batteries within Prismpack can be accessed, changed and replaced in-situ.


Emergency

Step 1




Remove gear housing cover

Step 2

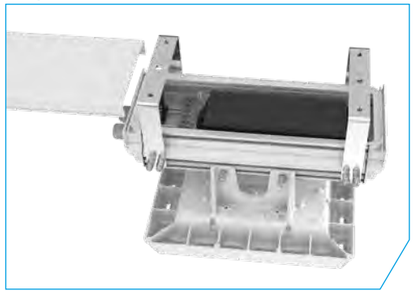

Remove driver (or emergency battery) and disconnect from housing

Step 3

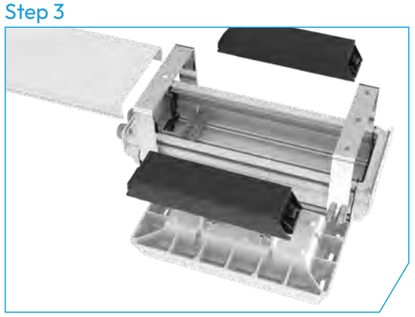

Install new driver (or emergency battery) with existing fasteners and reconnect


Step 4



Put gear cover back on

Serviceability

Serviceability is the ease with which a product can be maintained or serviced in order to isolate and replace any faulty components without having to replace the whole gear compartment or optical system. Prismpack has been designed to deliver all of these benefits to the end user – throughout the lifecycle of the product. With its easily removeable gear cover, it allows the electronic gear to be accessed and replaced in-situ.

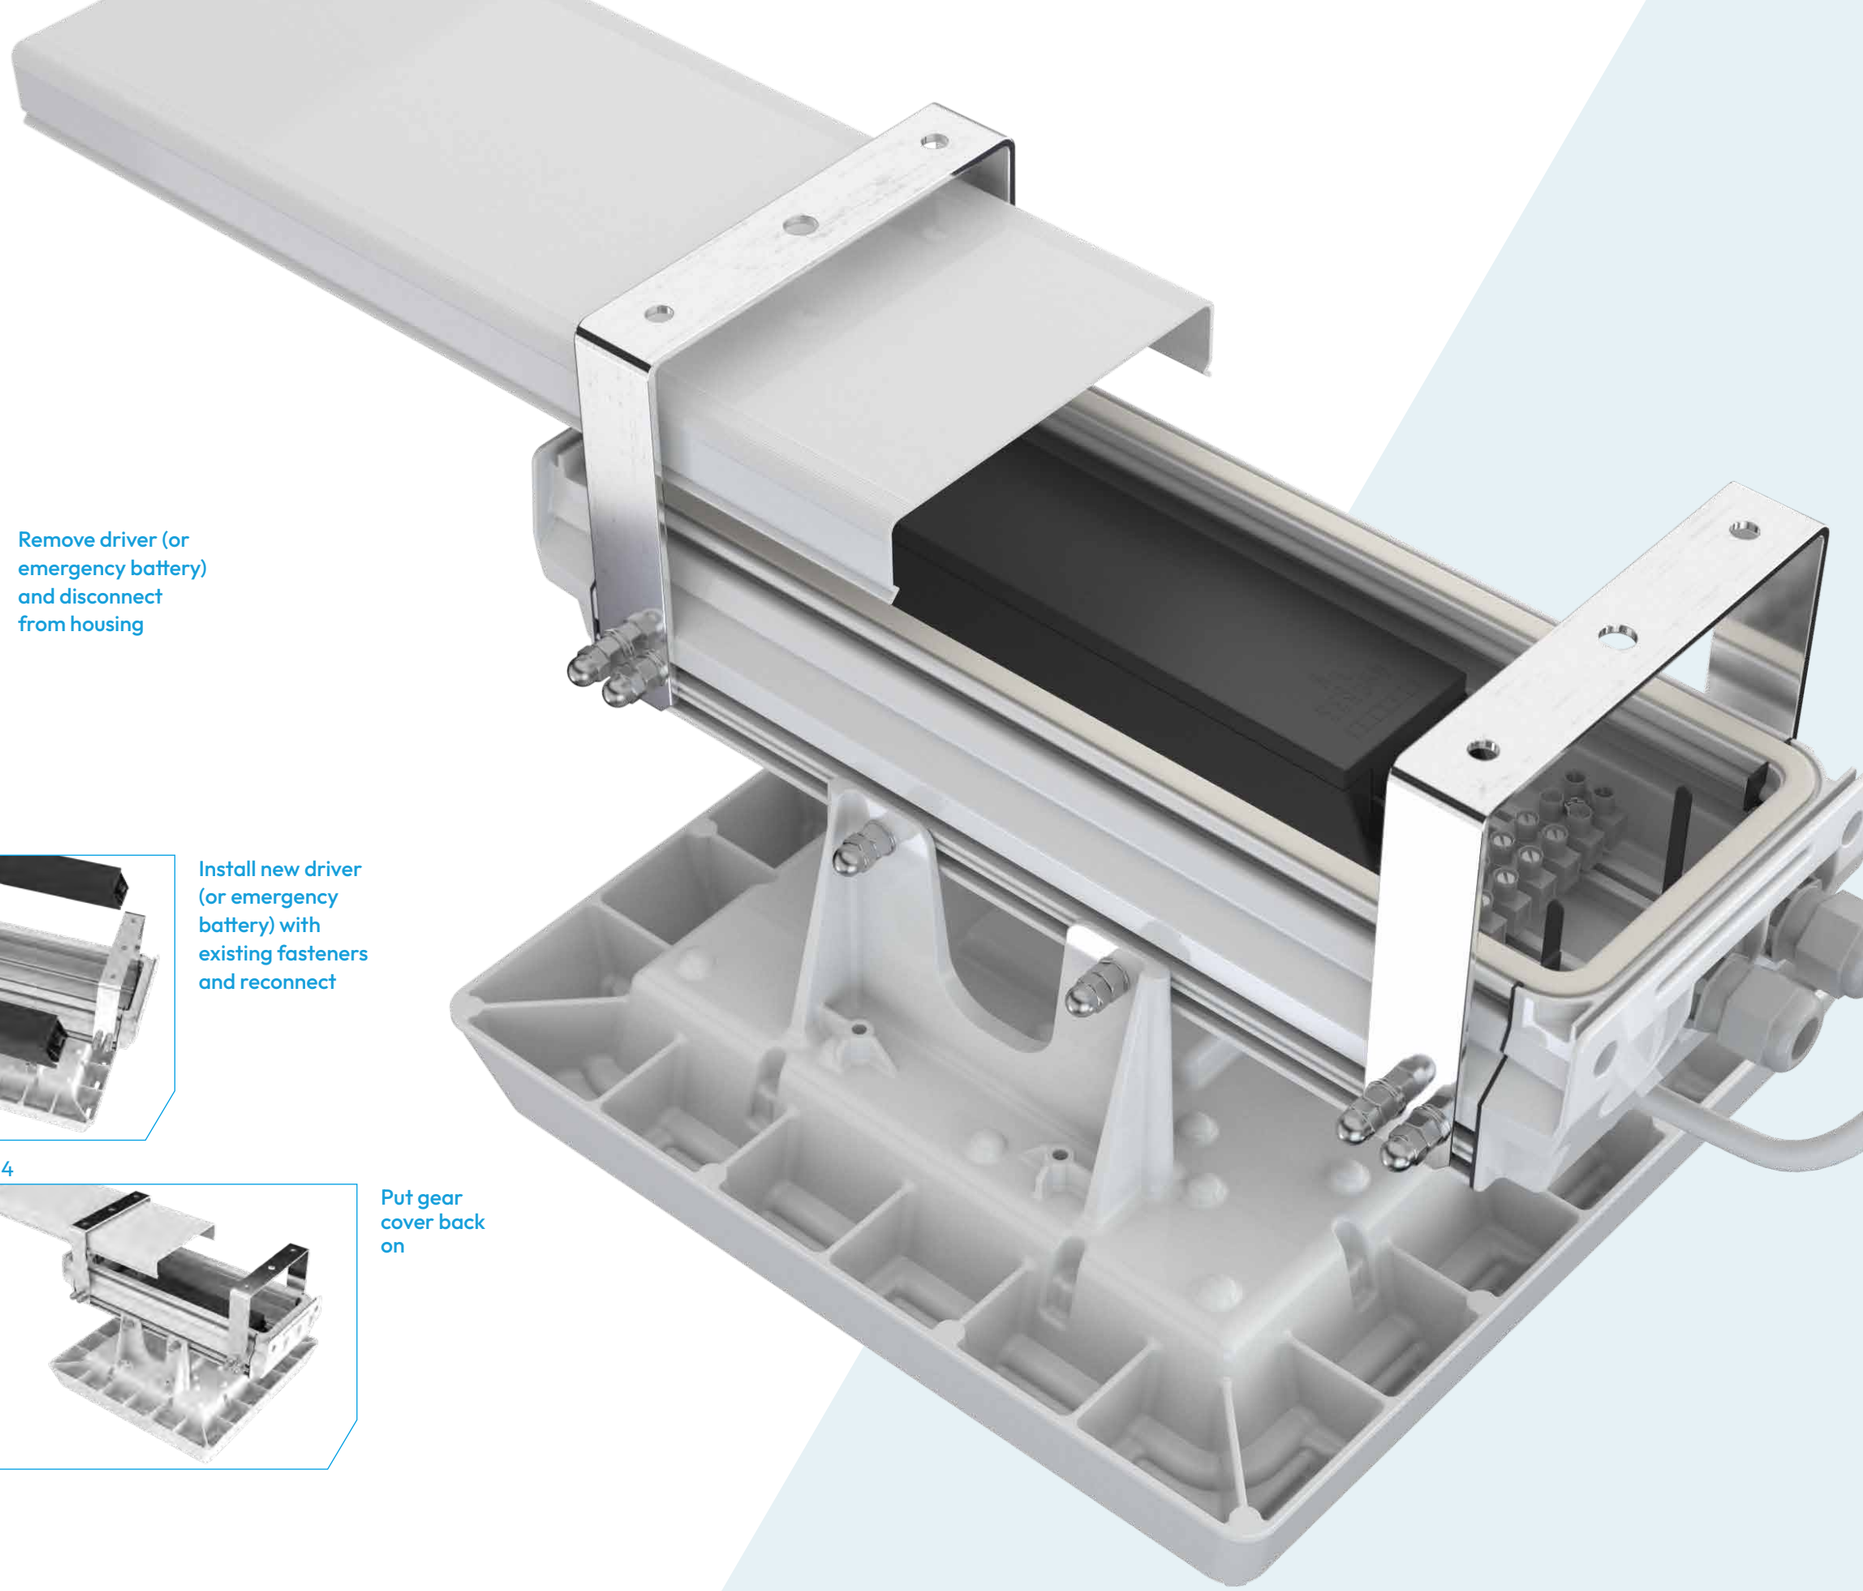


Serviceability

Upgradability

Upgradability


The modularity of **Prismpack** makes this LED luminaire future proof. The LED modules can be upgraded - not only making the luminaire fully maintainable but completely upgradeable - as LED efficiency improves so can your luminaire. Prismpack also has an optional, centrally mounted Zhaga socket for future upgrades and the addition of sensors.

Step 1

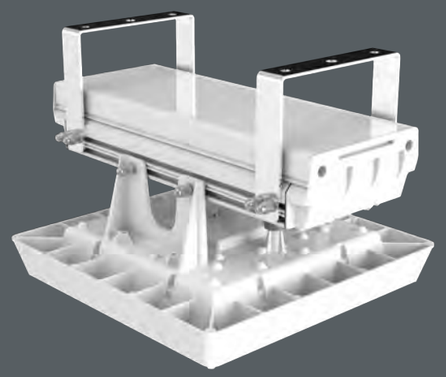


Remove gear housing cover

Step 2

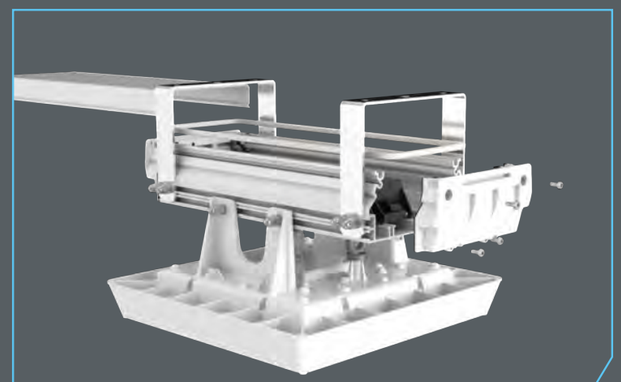


Remove gear cover and undo electrical termination. Remove end cap and mounting bracket.

Step 3

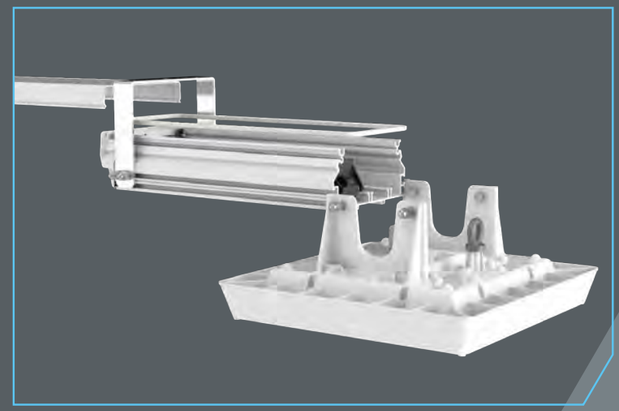


Loosen LED module fixing nut and slide out module.

Step 4

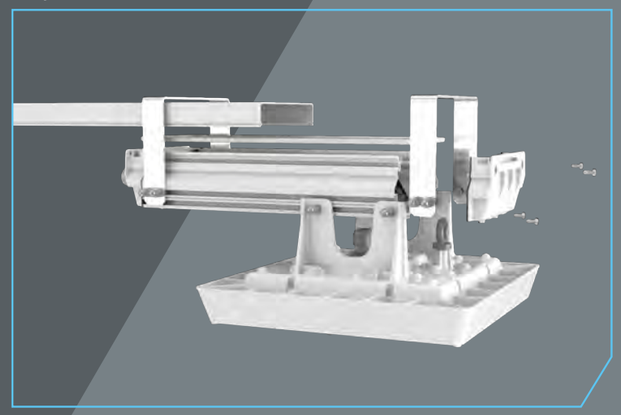

Bring new module in and rewire into gear housing. Redo bolt and secure bracket then end caps.


Step 5

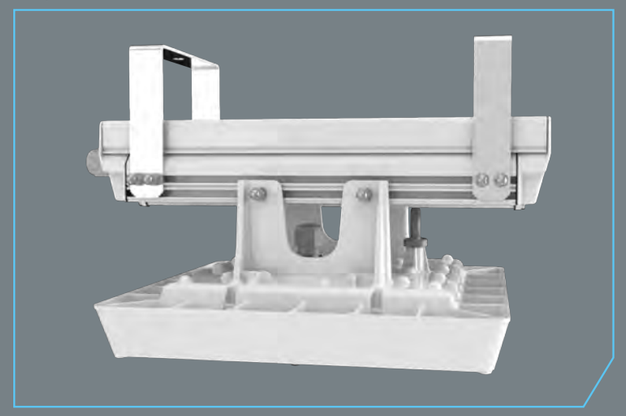


Replace gear cover.

Installation options


Prismpack is a versatile and efficient lighting system that provides intelligent solutions for any lighting task. The luminaire system can be used surface mounted, single point suspended or twin point suspended. The luminaire will always be supplied with a universal bracket that allows for surface mounting or suspension mounting (suspension kits available as accessory item). For ease of electrical installation and to ensure that the integrity of the luminaire is not compromised each luminaire is supplied with 3m flying lead (5-core or 6-core if emergency).

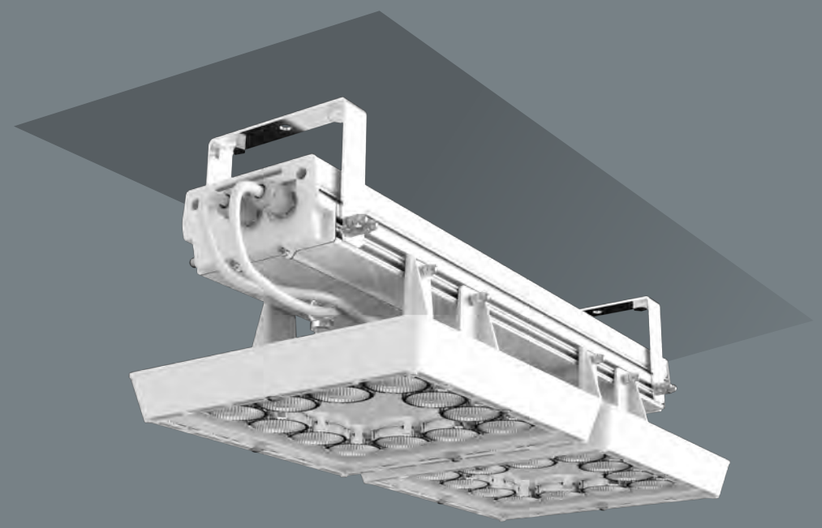

Surface mount

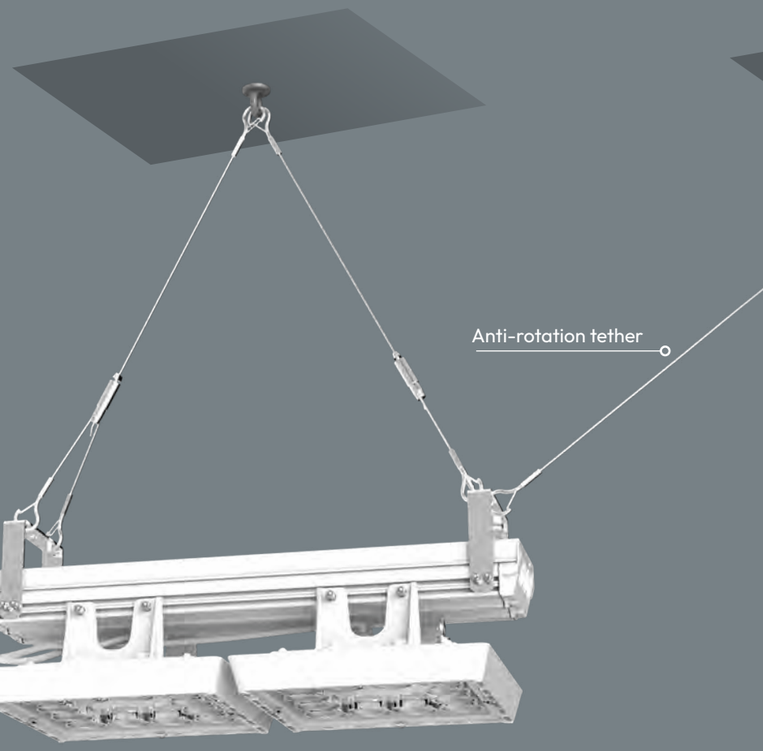

Single-point suspension with anti-rotation tether*

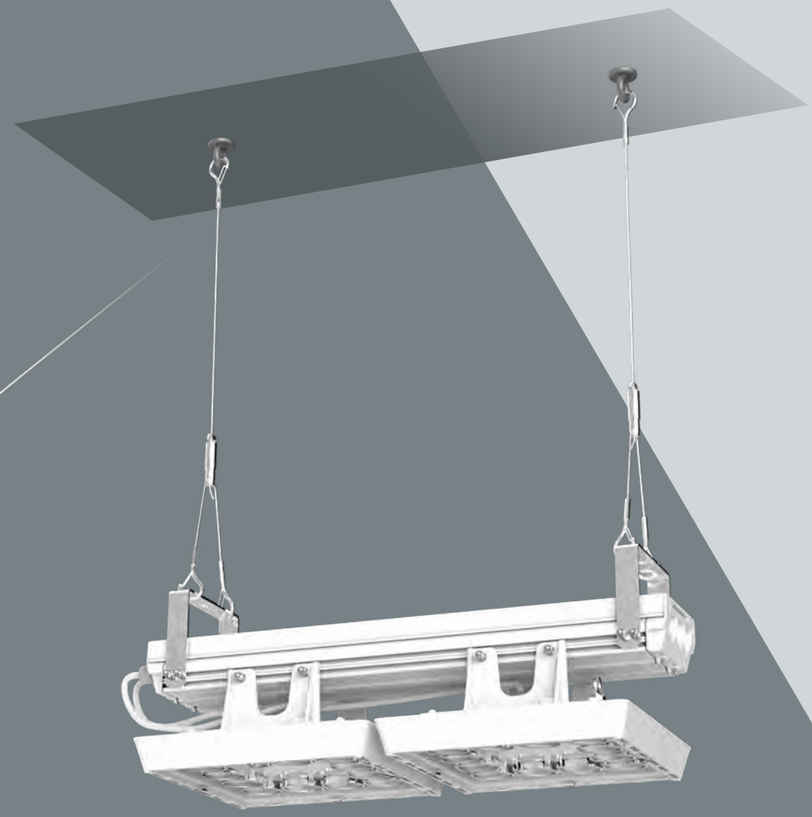

Twin-point suspension*

Flexibility

Note: as standard Prismpack is supplied with mounting brackets manufactured from zinc plated mild steel. For brackets suitable for for marine environments the .SB option can be used where the brackets will be manufactured stainless steel (316).

*Suspension kit sold separately (PPS.SUS)

EarthLIGHT

Lighting built on sustainability

EarthLIGHT is Acuity Inc.'s global sustainability framework, guiding how we design products, operate responsibly and contribute positively to the environments and communities we serve.

Through EarthLIGHT, we focus on reducing environmental impact, improving operational efficiency and developing lighting solutions that help customers lower energy use and carbon emissions while supporting long-term performance.

DOWNLOAD BROCHURE



Our 4 pillars of eco-design guide how we create more sustainable lighting solutions.

Pillar 1

Sustainable

Creating the best luminaires with the least amount of resource.

How are we doing it?

- Using recycled materials wherever possible.
- Reducing unnecessary materials, weight and component count.
- Ensuring only the components required for performance are used.
- Reducing labour time and energy consumption during the manufacturing process.

Pillar 2

Scalable

Customising each product exactly as required.

We offer:

- Product platforms that can be scaled to accommodate new features and technologies.
- Form-factor sizing for different applications to reduce material waste.
- Flexible mounting options to support a wide range of installation requirements.

Pillar 3

Serviceable

Designed with longevity and maintainability in mind.

All our products are:

- Upgradeable, allowing components to be replaced or enhanced as technology evolves.
- Simple in design to support efficient servicing and maintenance.
- Designed to provide easy access to internal components.
- Supported with readily available spare parts to enable repair and long-term product life.

Pillar 4

Separable

Supporting circular design and responsible material recovery.

All our products are:

- Designed with environmentally responsible materials.
- Fully recyclable at end of life.
- Easy to disassemble, allowing materials and components to be separated efficiently for recycling and recovery.

Circular economy

TM66

Holophane's commitment to sustainable product design is supported by independent assessment through the CIBSE TM66 circular economy framework.

Developed by the Chartered Institution of Building Services Engineers (CIBSE) and supported by the Lighting Industry Association (LIA), TM66 provides a recognised methodology for assessing circular product design in the lighting industry.

Traditional manufacturing models follow a linear process, where raw materials are extracted, used to produce products and ultimately discarded once they reach the end of their life. Circular design takes a different approach, focusing on reducing waste, extending product lifecycles and enabling materials to be reused or recovered.

TM66 helps us design luminaires that reduce waste, maximise value and improve maintainability, ensuring products can be repaired, reused and recycled at the end of their lifecycle.

TM66 Circular Economy Assessment Method (CEAM)

Using the TM66 CEAM assessment, luminaires are rated for circularity on a scale between 0.0 and 4.0.

Holophane aims to ensure its products achieve excellent circularity scores between 2.5 and 4.0, supporting longer product lifecycles and responsible material recovery.

To ensure the credibility, objectivity and consistency of our own ratings, our products are independently tested and verified through the Lighting Industry Association (LIA) Assured Scheme.

CIRCULAR ECONOMY ASSESSMENT METHOD
2.7 EXCELLENT

TM66 Assured Score


2.5 > 4.0	Excellent circularity
1.5 > 2.5	Definite/substantial progress to circularity
0.5 > 1.5	Some circular economy functionality
0 > 0.5	Very poor circular economy performance

Performance comparison


It is critical that customers of production and manufacturing applications find ways to reduce the amount of energy required to light their facilities.

Global climate change initiatives, such as the Paris Climate Agreement, mean that countries and the businesses within them have targets to meet in the overall reduction of carbon emissions. Prismpack is an LED luminaire system that can enable significant energy savings whilst also providing instant light and the possibility to dim the light level instantly.

Year 1
Energy consumption (kWh)



Year 1
Total CO_2 (tonnes)



New Build

Design Parameter Scenario 1

Production Space

- Dirty Environment
- Reflectances - C40% W30% F20%
- Room Dimensions (m) 100 x 100
- Total Area 10,000m²
- Luminaire installation height of 16m
- Target Lux - 300 lux Uniformity - >0.6 as per EN12464-1:2011
- Facility operating 12 hours per day, 365 days a year
- 2 years cleaning cycle

Product Used

110 Prismpack high bay luminaires

- Luminous flux: c 38,000
- Luminous efficiency: 145 lm/W
- Uniformity: 0.68
- UGR: 20
- 2.89 W/m²

132 Equivalent LED high bay luminaires

- Luminous flux: c 33,602
- Luminous efficiency: 129 lm/W
- Uniformity: 0.61
- UGR: 23
- 3.43 W/m²

Benefits

- 17% less luminaires reducing capital and installation costs
- 16% energy reduction for the installation
- Lower glare rating
- Over 12 tonnes of CO2 saved

53%
energy saving

Retro Fit

Design Parameter Scenario 1

Heavy Industry Space

- Dirty Environment
- Reflectances - C40% W30% F20%
- Room Dimensions (m) 100 x 100
- Total Area 10,000m²
- Luminaire installation height of 26m
- Target Lux - 300 lux Uniformity - >0.6 as per EN12464-1:2011
- Facility operating 24 hours per day, 365 days a year
- 2 years cleaning cycle

Existing Luminaires

49 1000W HID high bay luminaires

- Luminous flux: 88,781
- Luminous efficiency: 89 lm/W
- Uniformity: 0.57
- UGR: 27
- 4.90 W/m²

Product Used

49 Prismpack high bay luminaires

- Luminous flux: 70,441
- Luminous efficiency: 150 lm/W
- Uniformity: 0.75
- UGR: 18
- 2.30 W/m2

49 Equivalent LED high bay luminaires


- Luminous flux: 68,002
- Luminous efficiency: 132 lm/W
- Uniformity: 0.67
- UGR: 21
- 2.56 W/m²

Benefits


- 53% Year 1 energy saving vs 1000W HID
- 10% Year 1 energy saving vs LED equivalent
- Over 100 tonnes of CO2 saved
- 24% improvement in uniformity
- Reduction in glare

100
tonnes
CO^2 saved

Year 1
Energy consumption (kWh)

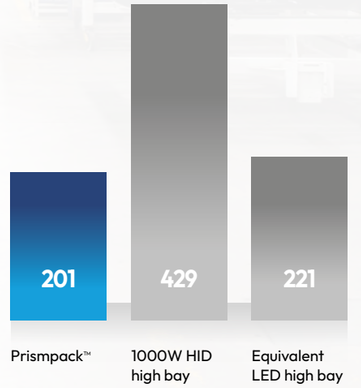

Year 1
Total CO_2 (tonnes)

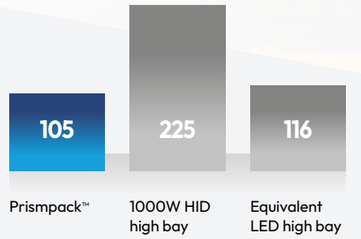

Reduce

Operating platforms

HOLOSOne is Holophane's intelligent wireless lighting controls platform that unifies lighting control across your entire site. From production halls and warehouses to access roads and yards, it provides complete visibility and control—indoors and out.



Platform 1 (local system)

Platform 1 supports **independent and localised lighting control**. It is ideal for areas where on-site configuration is preferred and where luminaires can be easily accessed during commissioning.

Suitable for:


- Pathways and walkways
- Public squares and plazas
- Car parks and access roads
- Smaller campus or landscape zones

Independent control



and / or

Localised control



Platform 2 (remote system)

Platform 2 provides users with **more freedom to manage their sites remotely**, both on and off-site, without being within the range of the lighting network to configure changes. This is ideal for situations where monitoring multiple sites from a central location is crucial and updates can be applied to all devices remotely.

Benefits include:

- Remote configuration and commissioning
- Site-wide scheduling
- Group, zone and area control
- Real-time insights and asset visibility

Cloud control



Features	Platform 1 (local system)	Platform 2 (remote system)
PIR occupancy and vacancy sensing	✓	✓
Daylight harvesting	✓	✓
Photocell control	✓	✓
Scene setting control	✓	✓
Lighting zones and zone linking	✓	✓
Local emergency scheduling and reporting	✓	✓
Time-based scheduling	✓	✓
Energy monitoring and reporting		✓
Occupancy heat map visualisation		✓
Remote emergency scheduling and reporting		✓
Gateway (subscription required)		✓

Scan me

Discover how our service plans keep your system running at its best.

Ordering details



Code	Lamp Type (required)
PPS	Prismpack
PPH	Prismpack High Ambient (Suitable for up to 70°C)

Code	Lamp Type (required)
.LM10X8	LED light engine producing c.10,000 lm with a nominal 4000K colour temperature
.LM20X8	LED light engine producing c.20,000 lm with a nominal 4000K colour temperature
.LM30X8	LED light engine producing c.30,000 lm with a nominal 4000K colour temperature
.LM40X8	LED light engine producing c.40,000 lm with a nominal 4000K colour temperature
.LM50X8	LED light engine producing c.50,000 lm with a nominal 4000K colour temperature
.LM60X8	LED light engine producing c.60,000 lm with a nominal 4000K colour temperature
.LM70X8*	LED light engine producing c.70,000 lm with a nominal 4000K colour temperature
.LM80X8*	LED light engine producing c.80,000 lm with a nominal 4000K colour temperature
.LM90X8*	LED light engine producing c.90,000 lm with a nominal 4000K colour temperature
.LM100X8*	LED light engine producing c.100,000 lm with a nominal 4000K colour temperature
.LM110X8*	LED light engine producing c.110,000 lm with a nominal 4000K colour temperature
.LM120X8*	LED light engine producing c.120,000 lm with a nominal 4000K colour temperature

Replace X with 4 for 4000K, 5 for 5000K and 6 for 6500K

Code	Light Engine (required)
.M1	1 Module
.M2	2 Module
.M3	3 Module
.M4	4 Module
.M6	6 Module

Please consult 'typical luminaire performance' table on page 29 to establish lumen and module compatibility

Code	Distribution (required)
.ND	Narrow Distribution
.MD	Medium Distribution
.WD	Wide Distribution

Code	Colour (required)
.C1	Smooth White (RAL9016)
.RAL****	RAL Colour (Customer choice)

Code	Lens (option)
.PGL	Prismatic Glass Lens
.PC	Polycarbonate Lens

Code	Dimming Outputs (option)
.LRD	DALI enabled (any on site controls wiring should be completed in compliance with the respective control system's Installation instructions (and limitations). Holophane cannot be held responsible for the operation of its luminaires with third party control systems)
.CL7	Programmed to deliver 70% of the initial lumens over the life of the luminaire
.CL8	Programmed to deliver 80% of the initial lumens over the life of the luminaire
.CL9	Programmed to deliver 90% of the initial lumens over the life of the luminaire

Code	Emergency (option)
.VDC	Luminaire supplied with internal DC fuse to accept 176-275VDC. Luminaire will dim to 15%.
.EM1*	Self-contained (self-test) 1hr maintained emergency battery and invertor - c.1000 lumens
.EM3*	Self-contained (self-test) 3hr maintained emergency battery and invertor - c.1000 lumens

Code	Controls
.H1H	Complete with HOLOSOne Bluetooth NLC wireless interior node with PIR and Daylight harvesting functionality suitable for mounting heights of up to 5m. Wireless range 16 meters in line of sight.
.H1L	HOLOSOne Bluetooth NLC wireless interior node with PIR and Daylight harvesting functionality suitable for mounting heights of up to 5m. Wireless range 16 meters in line of sight.
.TZ02*	Complete with 4-Pin Zhaga Socket – 'Bottom' (suitable node/presence detector supplied by others) with weather proof locking top.†
.TZP*	Complete with 4-Pin Zhaga Socket – 'Bottom' with a PIR (attached) for 360°, aisle and end of aisle. From 3 to 13 metres mounting.
.WIH	Integrated wireless node, supports grouping, suitable from 9m to 16m – includes PIR & photocell (Requires SER.COM.DAY or SER.COM.NIGHT commissioning).
.WIL	Integrated wireless node, supports grouping, suitable from 7m to 9m – includes PIR & photocell (Requires SER.COM.DAY or SER.COM.NIGHT commissioning).

Code	Guard
.WG	Wire guard

Code	Fixing Method
.CA	Safety Chain Attachment (chain not included)

Code	Enclosure (option)
.SF	Silicon free*

Code	Suspension (option)
.SB	Supplied with Stainless Steel 316 mounting brackets. Suitable for marine environments.

Example													
PPS	.LM10X8	.1M	.ND	.C1	.PGL	.LRD	.VDC	.H1H	.WG	.CA	.SF	.SB	

* Not available with PPH. † Not available with .LRD.

Note: Luminaire will always be supplied with a universal bracket that allows for surface mounting or suspension mounting (suspension kits available as accessory item). Supplied with 3m flying lead (5-core or 6-core if emergency).


Lumen data is considered to be representative of the configuration shown, and may vary, with a tolerance on flux of +/- 7% (typical of LED manufacturer's data) and luminaire power of +/- 5%.

BRCGS suitable "with PC option".

Accessories


PPS.SUS Suspension kit (1m) - includes 2 x suspension wire, fixing kit and anti-rotation tether for single point suspension.

Dimensions
& Performance

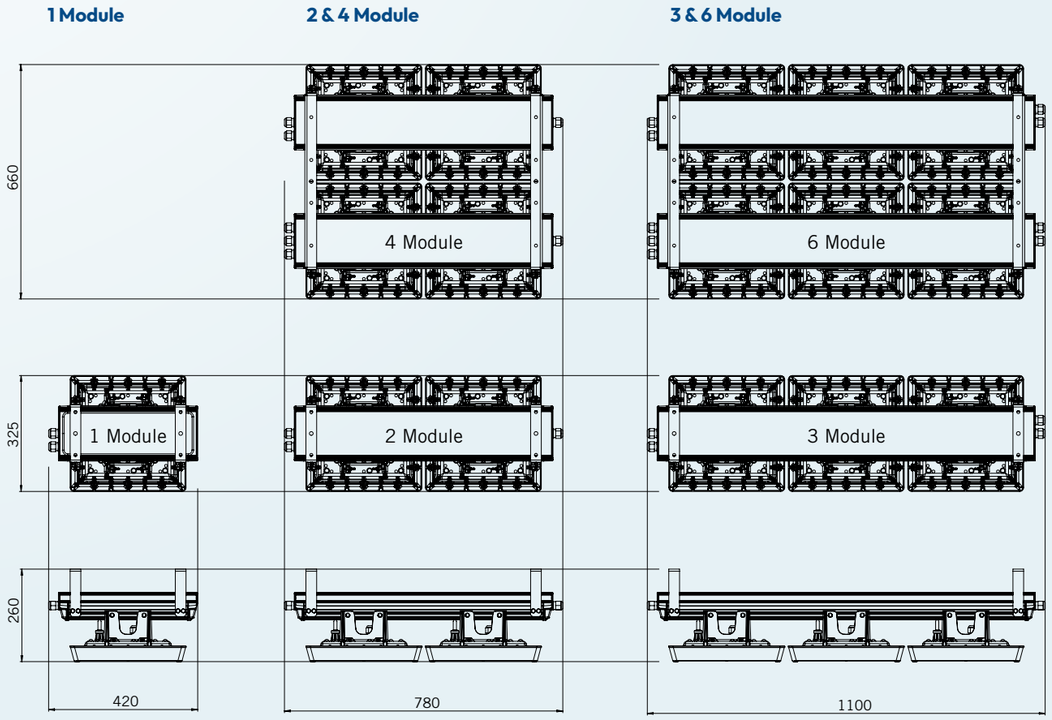

Note: Mechanical dimensions only. Space taken up by led-module to electrical compartment cabale not included. Please allow an extra 60mm in each side for cable. Please allow an extra 150mm for side mounted sensor.

dimensions in mm

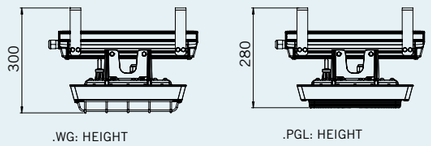

.WG: HEIGHT

.PGL: HEIGHT

Weight kg*

1 Module	7.1
2 Module	13.0
3 Module	19.1
4 Module	27.7
6 Module	39.8

Note: The specifications of the Holophane luminaire represents typical values. All descriptions, illustrations, drawings and specifications in the Holophane catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement.

*Refers to standard luminaire only. Does not account for weight of any additional options or accessories.

Typical luminaire performance

Configuration	Delivered Lumens*	LED Modules	Drivers	Power Usage (W)	Luminaire Efficacy (lpw)	Rated Life of LED Module**
Standard Version						
PPS.LM1048.M1	9,600	1	1	64	150	100,000 hrs
PPS.LM2048.M1	19,100	1	1	138	139	100,000 hrs
PPS.LM2048.M2	19,700	2	2	131	150	100,000 hrs
PPS.LM3048.M2	29,600	2	2	204	145	100,000 hrs
PPS.LM3048.M3	29,500	3	3	197	150	100,000 hrs
PPS.LM4048.M2	38,200	2	2	276	139	100,000 hrs
PPS.LM4048.M4	39,900	4	4	266	150	100,000 hrs
PPS.LM5048.M3	49,700	3	3	348	143	100,000 hrs
PPS.LM6048.M3	57,400	3	3	414	139	100,000 hrs
PPS.LM6048.M6	59,800	6	6	399	150	100,000 hrs
PPS.LM7048.M4	69,900	4	4	494	141	100,000 hrs
PPS.LM8048.M4	76,500	4	4	551	139	100,000 hrs
PPS.LM9048.M6	89,500	6	6	617	145	100,000 hrs
PPS.LM10048.M6	100,000	6	6	701	143	100,000 hrs
PPS.LM11048.M6	109,600	6	6	781	140	100,000 hrs
PPS.LM12048.M6	114,700	6	6	827	139	100,000 hrs

System Life – 100,000 Hrs at 45°C

High Ambient Version						
PPH.LM1048.M1	9,600	1	1	64	150	100,000 hrs
PPH.LM2048.M2	19,700	2	2	131	150	100,000 hrs
PPH.LM3048.M3	29,500	3	3	197	150	100,000 hrs
PPH.LM4048.M4	39,900	4	4	266	150	100,000 hrs
PPH.LM5048.M6	50,000	6	6	333	150	100,000 hrs
PPH.LM6048.M6	59,800	6	6	399	150	100,000 hrs

System Life – 50,000 Hrs at 70°C (High Ambient Version)
*Average of all distribution types.
**L70B50 @tq 70°C

Note: The delivered lumens are averages of all distributions types. All performance variants are based on a 288 LED configuration. The specifications of the Holophane luminaire represents typical values. All descriptions, illustrations, drawings and specifications in the Holophane catalogue and website represent only general particulars of the goods to which they apply and shall not form part of any contract. The company reserves the right to change specifications at its discretion without prior notification or public announcement. *Refers to standard luminaire only. Does not account for weight of any additional options or accessories.

Prismpack™



Speak to the Holophane experts today

Get in touch to discover how, together, we can ensure your lighting space works for you and the planet.

Holophane Europe Ltd.
Bond Avenue, Bletchley,
Milton Keynes, Bucks, MK1 1JG

01908 649292
info@holophane.co.uk
holophane.co.uk

HOL-BRO-PPS-UK-08/26

GOLD GROUP MEMBER

theLIA