CONSTRUCTION DOCUMENTATION

Design Title : table.scene
Revison Level :
Approved by :
Designer :
Company :
Address :
E-Mail :
Phone :
Date : 2026-04-03

Bill of materials (Number of kits: 1)

Pos	Article-No	Description	Units	Qty
1	1.11.030030.43SP-AA4AA4/740	Profile 30x30, 4F, heavy, plain	MM	1
2	1.11.030030.43SP-A00A00/768	Profile 30x30, 4F, heavy, plain	MM	1
3	1.11.030030.43SP-A00A00/768	Profile 30x30, 4F, heavy, plain **PER DRAWING 1**	MM	1
3.A	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 294.0 mm, Side: 4	EA	1
3.B	Q11A4I07161-5.5	Counterbore, left Ø 5.5 mm, distance 474.0 mm, Side: 4	EA	1
4	1.11.030030.43SP-AL0A00/900	Profile 30x30, 4F, heavy, plain Depth of thread, left: 26.0 mm	MM	1
5	1.11.030030.43SP-AA4AA4/670	Profile 30x30, 4F, heavy, plain	MM	2
6	1.11.030030.43SP-A00AL0/900	Profile 30x30, 4F, heavy, plain Depth of thread, right: 26.0 mm	MM	3
7	1.11.030030.43SP-A00A00/740	Profile 30x30, 4F, heavy, plain	MM	11
8	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)	EA	2
11	1.45.81200.046	Locking castor 250 kg, with center thread, dia: 50	EA	4
12	1.46.204.2828.1	Angle GD-Zn, 28x28, natural	EA	25
13	1.61.210	Handle light	EA	1
14	1.65.2538078	Lock GD-ZN	EA	1
15	0.63.D06912.05035	Cylindric head screw, DIN 6912 - M5x35	EA	2
16	0.63.D06912.06012	Cylindric head screw, DIN 6912 - M6x12	EA	4
17	0.63.D07991.04008	Flat head screw, DIN 7991 - M4x8	EA	12
18	0.63.D07991.06012	Flat head screw, DIN 7991 - M6x12	EA	8
19	0.63.WN7381.06010	Round head flange screw, M6x10, WN7381	EA	50
20	1.21.3F0	Connector, universal	EA	6
21	1.45.81000.M12M14	Threaded bolt M12/M14	EA	4
22	1.31.FM4	Threaded plate F, M4	EA	12
23	1.31.FM6	Threaded plate F, M6	EA	8
24	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6	EA	54
25	1.46.204.2828A	Cover cap for angle GD-Zn, 28x28	EA	25
26	1.62.448.17/17	Hinge 48 fixed, A 17.5	EA	2

Frame weight: 24.99 kg (55.09 lbs)

9	2.87.1571-99	Polycarbonat 4mm, SIZE: 680.00MM x 730.00MM **PER DRAWING 2**	SM	1
10	2.87.1571-99	Polycarbonat 4mm, SIZE: 800.00MM x 800.00MM **PER DRAWING 3**	SM	1

Panels weight: 4.94 kg (10.89 lbs)

Total Weight: 29.93 kg (65.98 lbs)

Isometric view

Some accessories may not be shown

Multiview

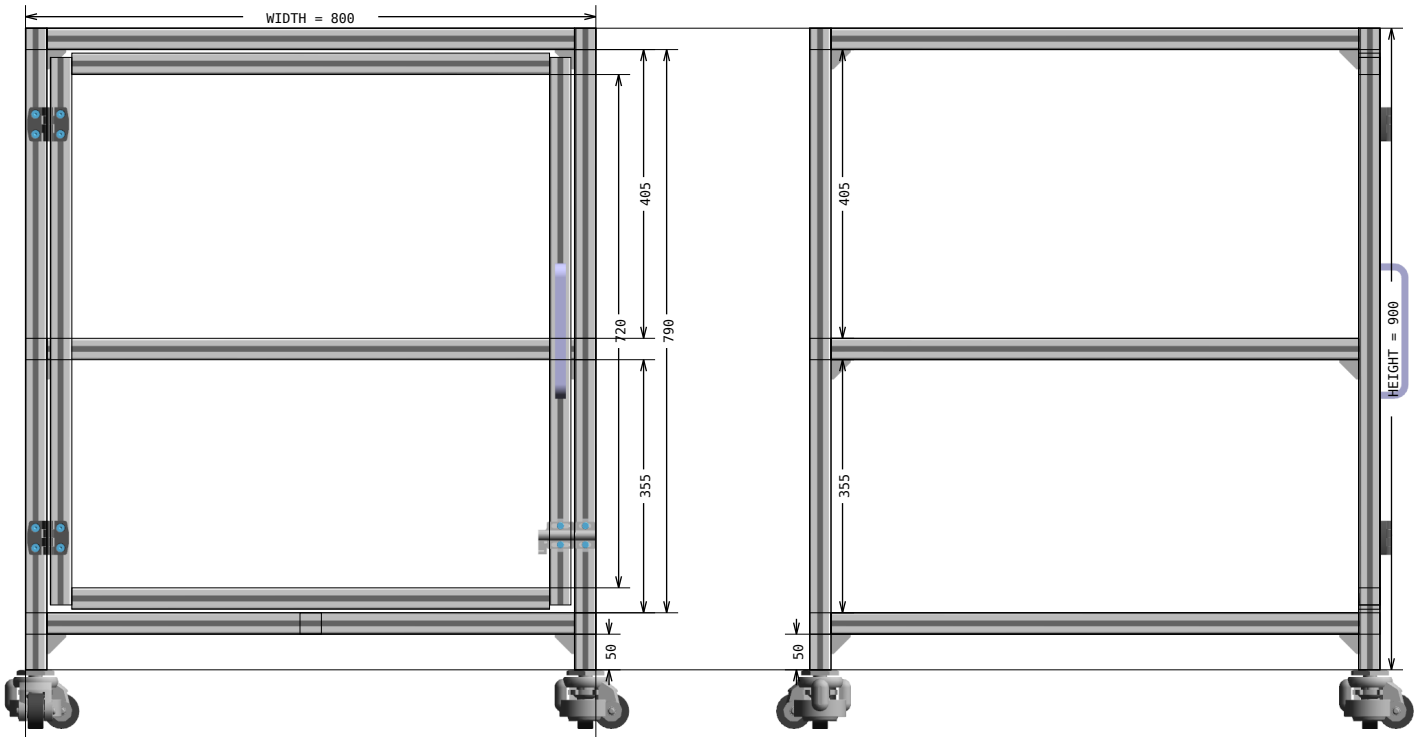

FRONT

LEFT

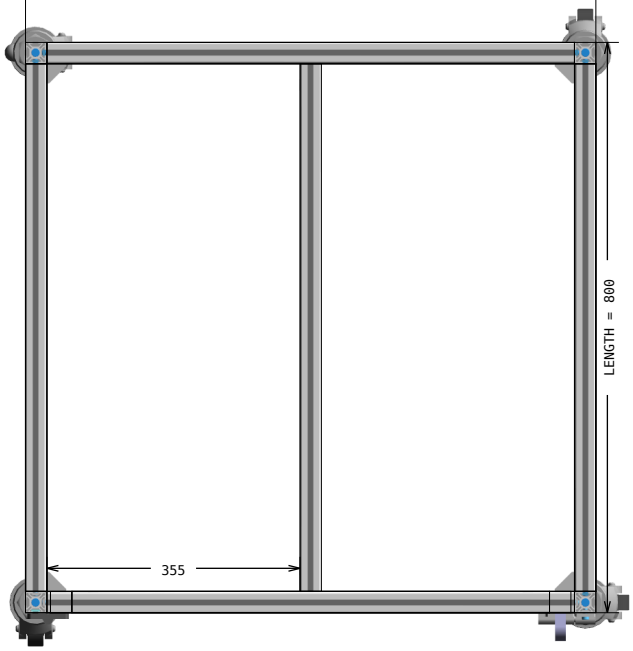

TOP

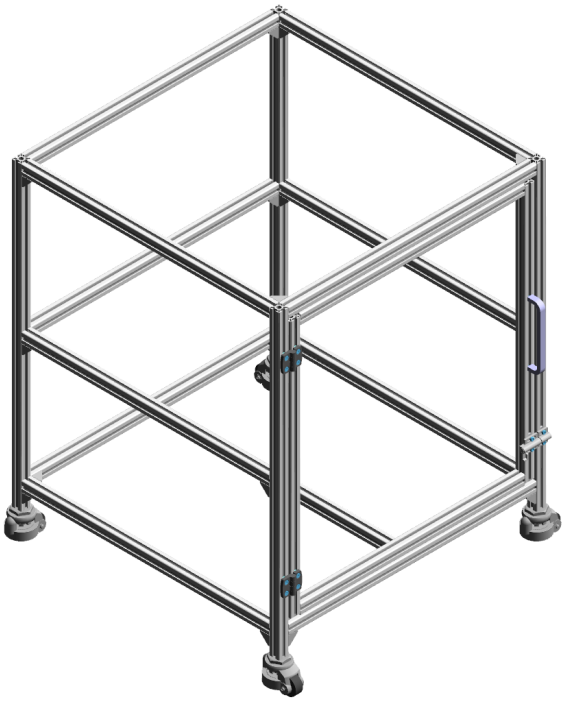

ISOMETRIC

Design Title : table.scene
Customer Name :
Date : 2026-04-03

Exploded view

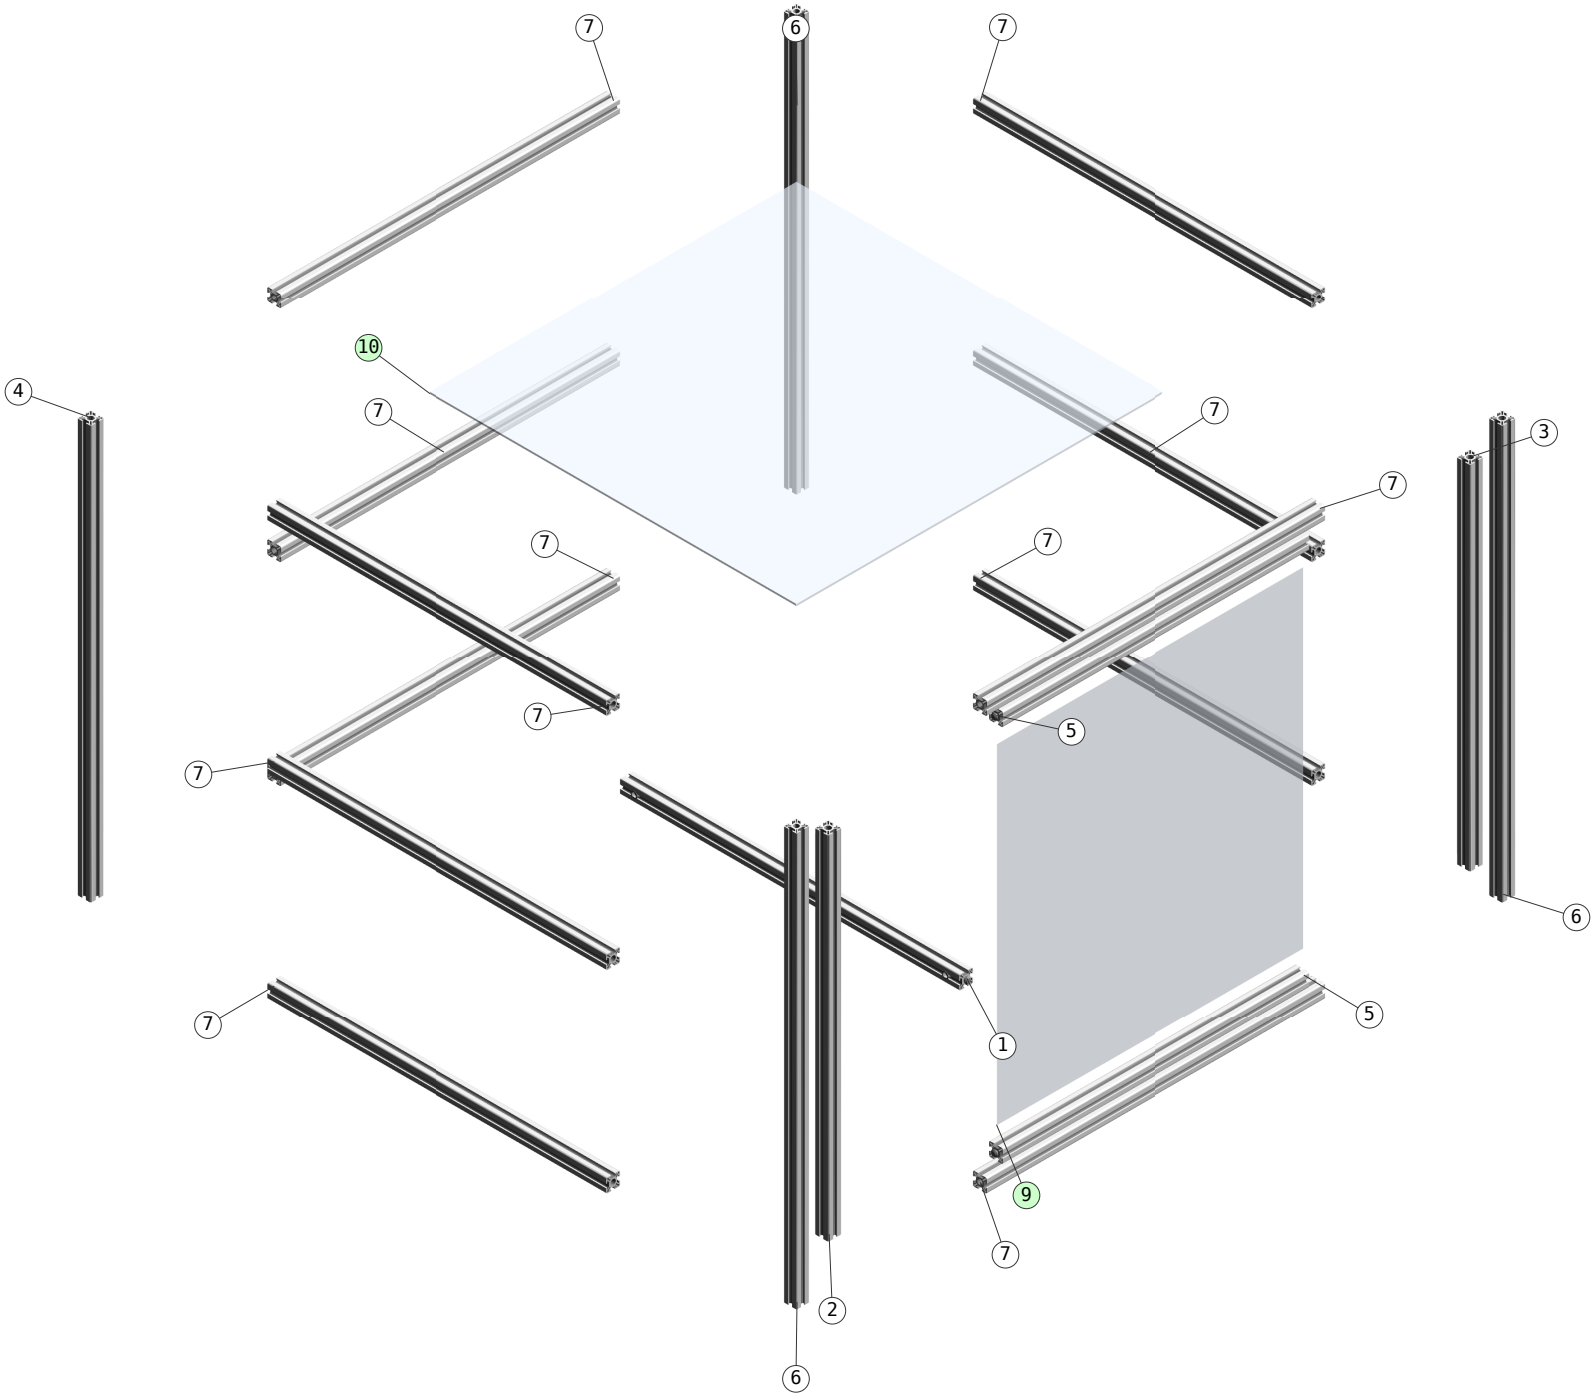

Components of group: Door

Panels are not shown for image clarity, their locations are marked by green balloons

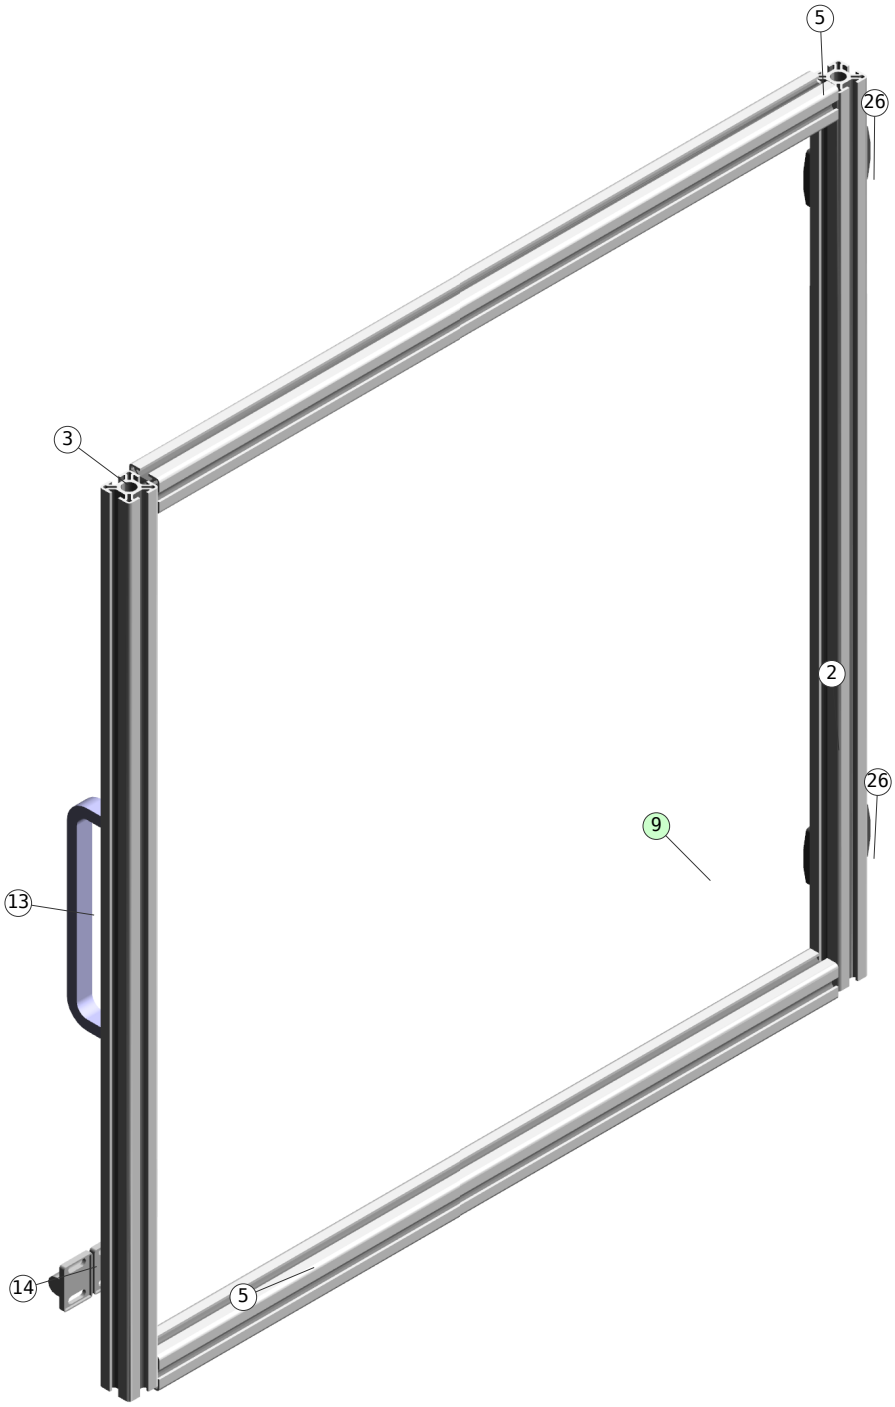

Assembly List

Pos	Article-No	Description	Related parts	Qty
1	1.11.030030.43SP-AA4AA4/740	Profile 30x30, 4F, heavy, plain		
			1.21.3F0, Connector, universal	2
5	1.11.030030.43SP-AA4AA4/670	Profile 30x30, 4F, heavy, plain		
			1.21.3F0, Connector, universal	4
10	2.87.1571-99	Polycarbonat 4mm		
			1.31.FM4, Threaded plate F, M4	12
			0.63.D07991.04008, Flat head screw, DIN 7991 - M4x8	12
11	1.45.81200.046	Locking castor 250 kg, with center thread, dia: 50		
			1.45.81000.M12M14, Threaded bolt M12/M14	4
12	1.46.204.2828.1	Angle GD-Zn, 28x28, natural		
			1.46.204.2828A, Cover cap for angle GD-Zn, 28x28	25
			1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6	50
			0.63.WN7381.06010, Round head flange screw, M6x10, WN7381	50
13	1.61.210	Handle light		
			0.63.D06912.05035, Cylindric head screw, DIN 6912 - M5x35	2
14	1.65.2538078	Lock GD-ZN		
			1.32.4FM6, T-Nut for subsequent insertion, w. spring F, M6	4
			0.63.D06912.06012, Cylindric head screw, DIN 6912 - M6x12	4
26	1.62.448.17/17	Hinge 48 fixed, A 17.5		
			1.31.FM6, Threaded plate F, M6	8
			0.63.D07991.06012, Flat head screw, DIN 7991 - M6x12	8

Profile machining details

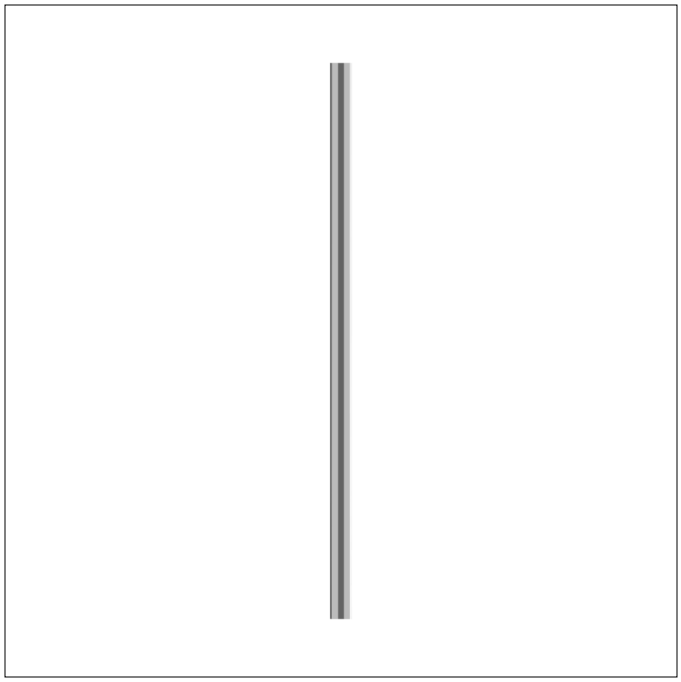

DRAWING 1, Pos 3
SIDE 1, bar length: 768 mm

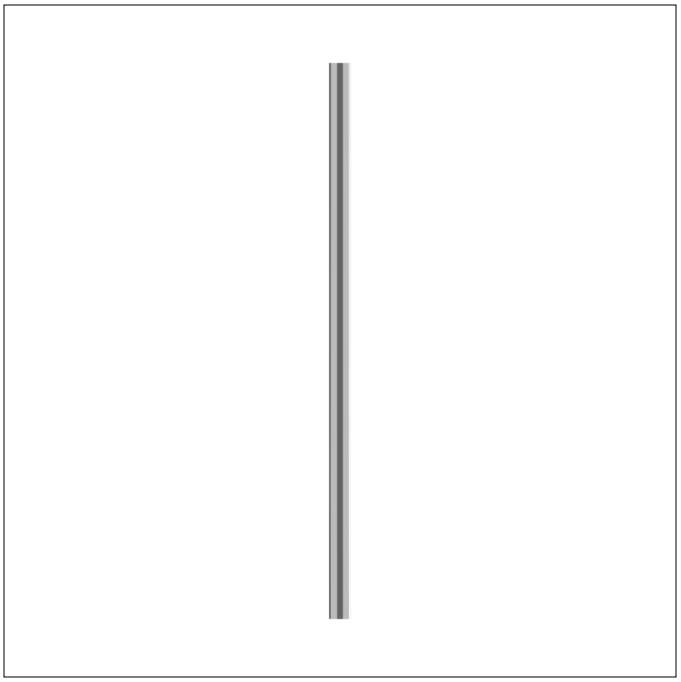

DRAWING 1, Pos 3
SIDE 2

← Profile "left end" is always at the bottom of the drawing. All dimensions are from "left".

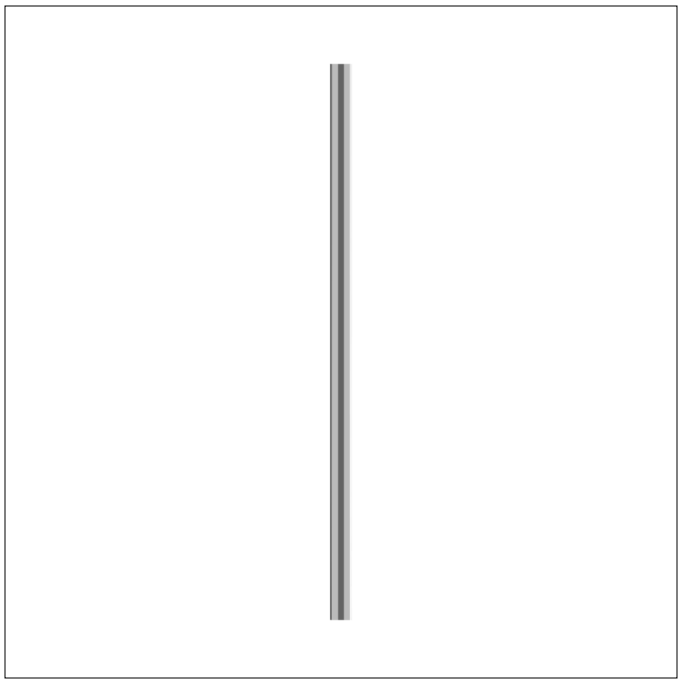

DRAWING 1, Pos 3
SIDE 3

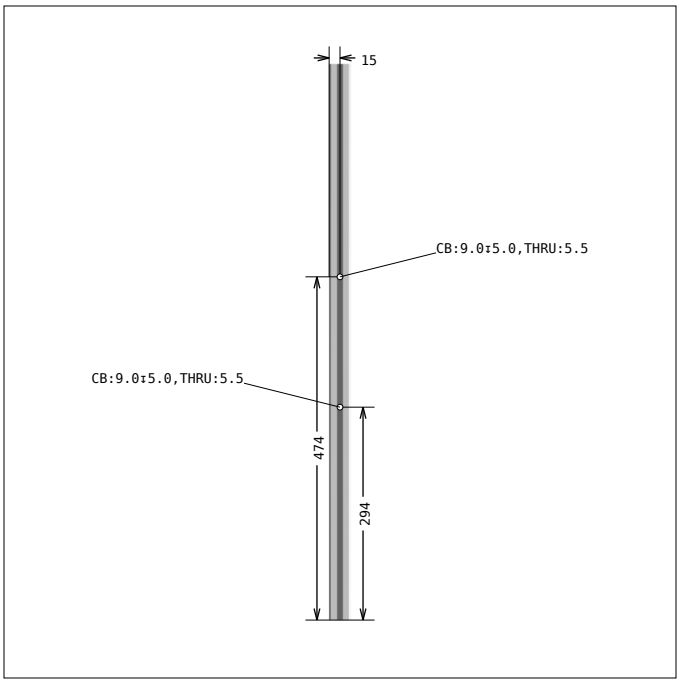

DRAWING 1, Pos 3
SIDE 4

Panels

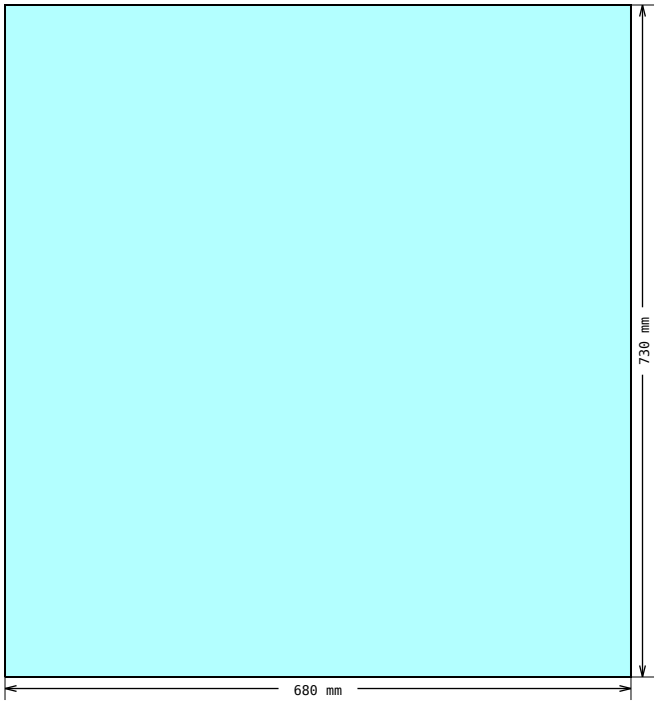

DRAWING 2, Pos 9
Shape measurements

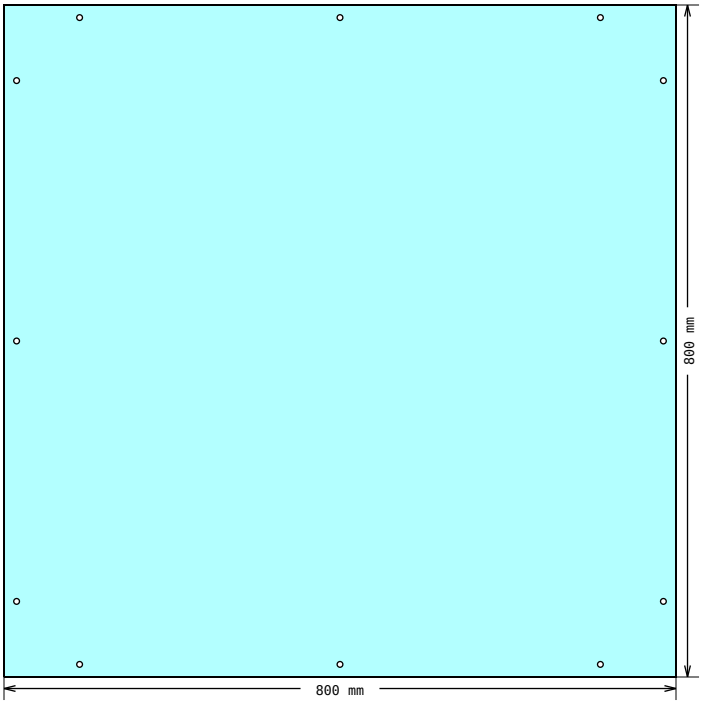

DRAWING 3, Pos 10
Shape measurements

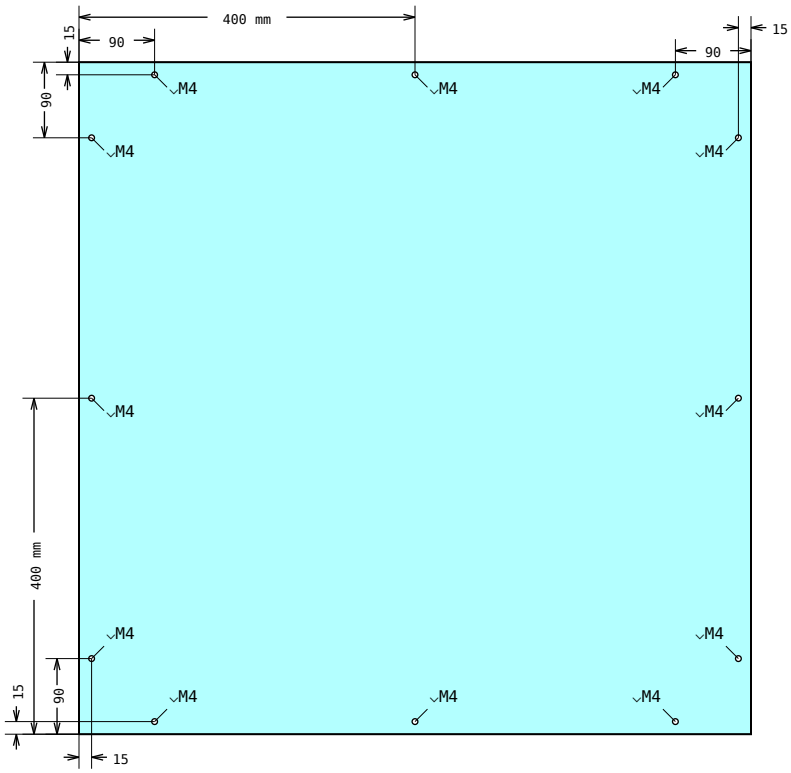

DRAWING 3, Pos 10
Hole placement

Suggested profile cuts (incl. kerf: 3.5 mm)

Article-No	Cuts	Waste (mm)
1.11.030030.43SP		



99.5 mm



52.0 mm



2422.5 mm

Assembly hints

ACCESSORY	1.32.4FM6	T-Nut for subsequent insertion, w. spring F, M6

Fixing with leaf spring

Application
Fastening element for screw-type connections

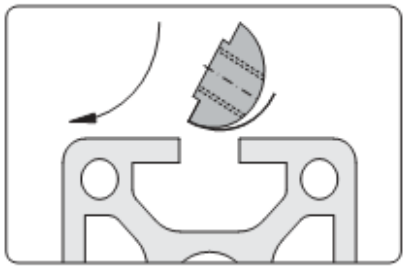

Insert front-sided and rotate

Technical data
Design steel:
- material: steel
- surface: galvanised

Design stainless:
- material: stainless steel 1.4305
- surface: pickled and passivated

max. moment of torque: $M_{A, max}$

These t-nuts are easily inserted into assembled frames

CONNECTOR	1.21.3F0	Connector, universal



Insert the cross bushing



Push in the anchor



Pretension the anchor



Comments
For the optimal assembly of the profiles the connector is to be installed in such a way that the neck is flush to the profile front side

Most MayTec connectors follow these assembly steps. Tightening torque is: 5-15 Nm for 20mm profiles, 30 Nm for 30mm group, 35 Nm for 40mm and larger profiles.

Assembly hints

None	1.41.F14.1	Combination profile PP, F, 1-4.5, grey (bar 2.5 m)

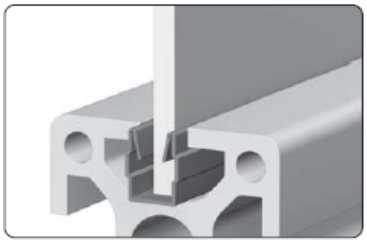

Use as reduction profile

Application
Combination profiles for use as reduction or cover profiles

Technical data
bar length: 2.5 m
material: PP
- oil and water resistant

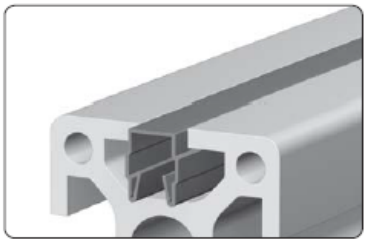

Use as slot-cover profile

Colours: grey
black
orange
red
blue
green

These profiles fill the space between the panel and the walls of the T-slot.

ACCESSORY	1.46.204.2828.1	Angle GD-Zn, 28x28, natural

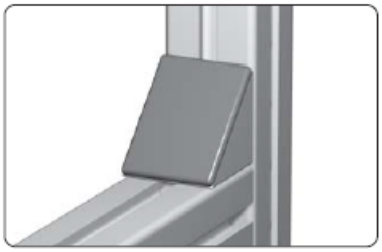

Application
For supporting profiles and mounting various machine components

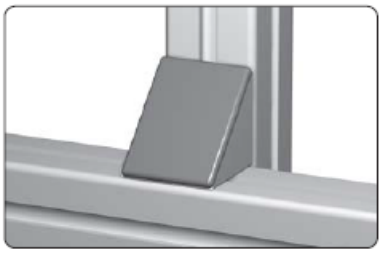

For mounting cross to the slot the noses can be broken off

Technical data
material:
- angle: GD-Zn
- cover cap: PA-GK 30
- T-slot nut: steel, galvanised
- screw: steel, galvanised

surface: natural or aluminium coloured powder-coated

These corner brackets or gussets can be used to reinforce or completely replace the Universal or Standard profile connector, make sure to choos the kit appropriate for your slot type H, F or E. These parts could also be used to mount additional parts and hardware.

Assembly hints

None	1.31.FM4	Threaded plate F, M4	
	1.31.FM6	Threaded plate F, M6	
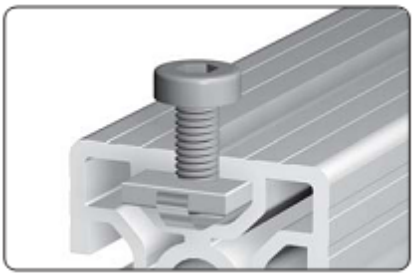 Fixed into position with leaf spring **Application** Fastening element for screw-type connections 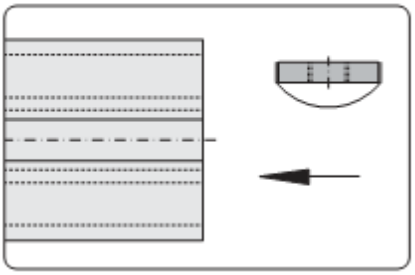 **Assembly** Insert from end			These plates must be inserted from the open side of the profile, prior to final frame assembly