


AS-11

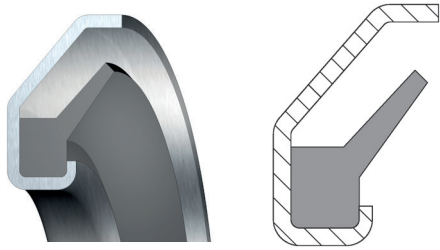

Description

- Axial seal consisting of metal case and elastomer seal
- Metal case on the outer diameter extended in the axial direction
- Seal material: NBR, FKM
- Reinforcement plate material: JIS G3141 SPCC Galvanised + chromatised (CR VI free), corresponds to 1.0330 / AISI 1008

Function

The AS-11 is an axial rotary seal that is primarily intended for sealing against external contaminants such as dirt, liquids, swarf, etc. It protects radial shaft seals and bearings from abrasive ambient conditions. The metal case on the outer diameter of the AS-11 is extended in the axial direction. This protects the elastomer seal from damage and ensures that the seal sits properly on the shaft. The groove running along the axial counter-surface creates an additional labyrinth seal. The design provides additional protection from ingress of contaminants.

Special properties

- Standard seal for compact installation
- The centrifugal effect of the metal ring provides additional sealing
- Low required surface quality of the shaft surface
- Centrifugal force reduces friction as the peripheral speed increases
- Good dynamic sealing effect
- Reliable design with a wide range of applications
- Simple installation, no axial stop required

Applications include:

- Wheel hubs
- Construction and agricultural machinery
- Pumps
- Drive technology
- Cardan shafts
- Transmissions
- Machine tools

Materials

NBR 70 black
FKM 70 brown

Usage parameters

NBR 70

Temperature: -40 °F to +212 °F NBR
Speed: Rotation up to 12 (20) m/s
Pressure: 0 MPa

Media:

- Plant-based and animal-based oils and greases
- Hydraulic oils (DIN 51524) HL, HLP
- Mineral oil-based lubricants
- Flame-resistant hydraulic fluids HFA, HFB, HFC
- Silicone oils
- Hot water up to approx. 176 °F
- Aliphatic hydrocarbons

FKM 70


Temperature: -22 °F to +356 °F FKM
Speed: Up to 12 (20) m/s
Pressure: 0 MPa

Media:

- Mineral oil-based oils and greases
- Synthetic oils and greases
- Aliphatic, aromatic and chlorinated hydrocarbons
- Hydraulic fluids HFD
- Fuels
- Non-polar solvents
- Plant-based and animal-based oils and greases
- Silicone oils and greases
- Ozone, weather, ageing, UV radiation

The maximum values given must not occur simultaneously!

Installation dimensions

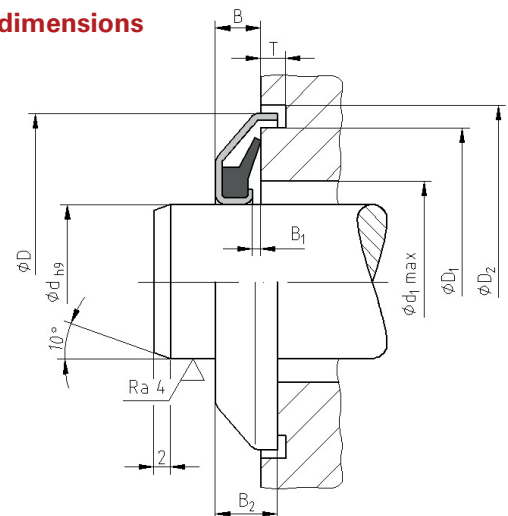

AS-11 Dimensions

Article No.	Ød	ØD	B	B ₁	B ₂	T	Ød ₁	ØD ₁	ØD2	material
111938	15	32	4	1,0	6,0	3,0	21,0	29,0	34,0	FKM
134036	15	32	4	1,0	6,0	3,0	21,0	29,0	34,0	NBR
66319	17	34	4	1,0	6,0	3,0	23,0	31,0	36,0	NBR
111939	17	34	4	1,0	6,0	3,0	23,0	31,0	36,0	FKM
66320	20	37	4	1,0	6,0	3,0	26,0	34,0	39,0	NBR
111940	20	37	4	1,0	6,0	3,0	26,0	34,0	39,0	FKM
66321	25	42	4	1,0	6,0	3,0	31,0	39,0	44,0	NBR
134049	25	42	4	1,0	6,0	3,0	31,0	39,0	44,0	FKM
134037	30	48	4,5	1,0	6,5	3,0	37,0	45,0	50,0	NBR
134114	30	48	4,5	1,0	6,5	3,0	37,0	45,0	50,0	FKM
111943	35	53	4,5	1,0	6,5	3,0	42,0	50,0	55,0	FKM
134038	35	53	4,5	1,0	6,5	3,0	42,0	50,0	55,0	NBR
111944	40	58	4,5	1,0	6,5	3,0	47,0	55,0	60,0	FKM
134039	40	58	4,5	1,0	6,5	3,0	47,0	55,0	60,0	NBR
281072	40	58	4,5	1,0	6,5	3,0	47,0	55,0	60,0	FKM
111945	45	63	4,5	1,0	6,5	3,0	52,0	60,0	65,0	FKM
134040	45	63	4,5	1,0	6,5	3,0	52,0	60,0	65,0	NBR
111946	50	72	5,5	1,0	7,5	3,0	58,0	68,5	74,0	FKM
134041	50	72	5,5	1,0	7,5	3,0	58,0	68,5	74,0	NBR
111947	55	77	5,5	1,0	7,5	3,0	63,0	73,5	79,0	FKM
134042	55	77	5,5	1,0	7,5	3,0	63,0	73,5	79,0	NBR
111948	60	82	5,5	1,0	7,5	3,0	68,0	78,5	84,0	FKM
134043	60	82	5,5	1,0	7,5	3,0	68,0	78,5	84,0	NBR
111949	65	87	5,5	1,0	7,5	3,0	73,0	83,5	89,0	FKM
134044	65	87	5,5	1,0	7,5	3,0	73,0	83,5	89,0	NBR
111950	70	92	5,5	1,0	7,5	3,0	78,0	88,5	94,0	FKM
134045	70	92	5,5	1,0	7,5	3,0	78,0	88,5	94,0	NBR
66331	75	97	5,5	1,0	7,5	3,0	83,0	93,5	99,0	NBR
134048	75	97	5,5	1,0	7,5	3,0	83,0	93,5	99,0	FKM
111951	80	102	5,5	1,0	7,5	3,0	88,0	98,5	104,0	FKM
134046	80	102	5,5	1,0	7,5	3,0	88,0	98,5	104,0	NBR
66333	85	107	5,5	1,0	7,5	3,0	93,0	103,5	109,0	NBR
111952	85	107	5,5	1,0	7,5	3,0	93,0	103,5	109,0	FKM
66334	90	112	5,5	1,0	7,5	3,0	98,0	108,5	114,0	NBR
111953	90	112	5,5	1,0	7,5	3,0	98,0	108,5	114,0	FKM
66335	95	117	5,5	1,0	7,5	3,0	103,0	113,5	119,0	NBR
111954	95	117	5,5	1,0	7,5	3,0	103,0	113,5	119,0	FKM
111955	100	122	5,5	1,0	7,5	3,0	108,0	118,5	124,0	FKM
134047	100	122	5,5	1,0	7,5	3,0	108,0	118,5	124,0	NBR