


## RP-78

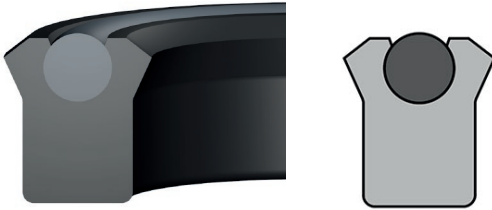

### Description

RP-78 is a loaded, single-acting compact U-ring with beveled sealing lips. The polyurethane U-ring is 'loaded' with an NBR O-ring in the groove to improve sealing performance. Due to its symmetrical profile the RP-78 can be used in hydraulic systems as either a rod or piston seal.

### Special properties

- O-ring loaded sealing profile provides very good performance in
  - low pressure applications
  - vacuum applications
  - applications with pressure peaks and/or vibrations
  - heavy duty applications
  - low temperature applications
  - hydraulic cylinders with long term holding function
- Excellent static and dynamic sealing function
- High abrasion resistance
- High extrusion resistance
- Long service life
- Very low compression set due to the O-Ring

### Application

RP-78 is a hydraulic seal, mainly used for sealing rods or plungers under harsh conditions.

- Construction and agricultural machinery
- Iron and steel industry
- Standard hydraulic cylinders
- Injection moulding machines
- Mobile hydraulics
- Presses
- Marine hydraulics

### Operating parameters

Pressure: max. 400 bar

Temperature: -22 °F to +212 °F with  
standard NBR O-ring (use in mineral oils)

Speed: up to 0.5 m/s

### Media:

mineral oil-based hydraulic fluids