






## RFF FORMAT

Start of Recording Date MM/DD/VY

(8 bytes)

b (1 byte)

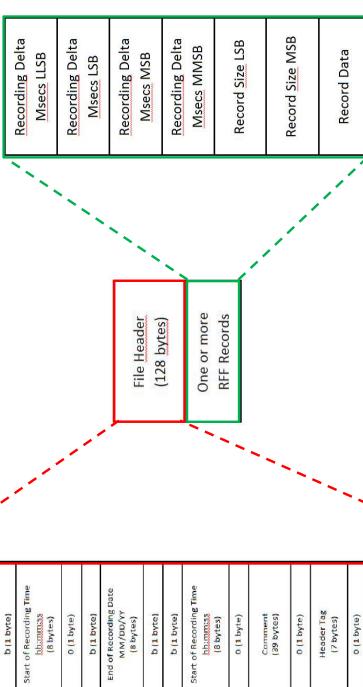

## Where:

- Recording Delta: milliseconds Record Size in bytes in Little from the start recording time (see RFF Header) in Little Endian representation
  - Endian representation

b stands for the blank (Ascii 32 dec) character

Header Type (2 bytes)

Baud Rate (7 bytes)

0 (1 byte) Padding (30 bytes)

0 stands for the 0x00 byte

Padding is a sequence of bytes set to (0x00) Header tag is set to the string "RFF b b b "