

# Software system for data acquisition and analysis operating the ATLAS-TPX Network

Jakub Begera, Petr Manek, Benedikt Bergmann, Petr Burian, Josef Janecek, Stepan Polansky,  
Stanislav Pospisil *Senior Member, IEEE*

**Abstract**—A network of 15 Timepix pixel detectors was installed within the ATLAS experiment at CERN, Geneva. The network is capable of real-time measurement of the composition and spectral characteristics of the radiation fields. Its operation is managed by a dedicated software system. The presented article describes primary components of this system responsible for communication with detector hardware, online operation monitoring, remote acquisition control, automated data verification and analysis. The processed data can be accessed through an interactive web-based Data Visualization Application, which is available to the scientific community.

## I. INTRODUCTION

The ATLAS-MPX Network has been installed in the ATLAS cavern at the LHC at CERN [1]. During the 2013-2014 shut-down period this network was upgraded to a two-layer Timepix design (ATLAS-TPX) with a faster readout system and improved capabilities to discriminate charged particles and gamma rays against neutrons [2].

Operation of the network is managed by a distributed software system comprised of several independent components:

- The Acquisition and Control Subsystem handles communication with detectors through the readout interface.
- The Data Analysis Subsystem automatically verifies and processes frames taken by detectors.
- The Data Visualization Application displays processed data in the form of pixel matrices and trace flux charts.

## II. DEVICE DESIGN

Each ATLAS-TPX device consists of two Timepix [3] readout chips with silicon sensor layers of thicknesses  $300\ \mu\text{m}$  and  $500\ \mu\text{m}$  facing each other [4]. They are interlaced by a set of neutron converters. The Timepix ASIC (application specific integrated circuit) divides the sensor area into a square matrix of  $256 \times 256$  contiguous pixels with a pixel dimension of  $55\ \mu\text{m}$ . It allows a configuration of each pixel in either of the three modes of operation:

J. Begera, P. Manek, B. Bergmann, P. Burian, J. Janecek, S. Polansky, S. Pospisil are with the Institute of Experimental and Applied Physics, Czech Technical University in Prague, Horska 3a/22, 128 00 Praha 2-Albertov, Czech Republic.

P. Burian is also with the Faculty of Electrical Engineering, University of West Bohemia.

The work has been done in the frame of the Medipix collaboration. This research project has been supported by the Ministry of Education, Youth and Sports of the Czech Republic under project numbers: LM2015058 and LG15052

E-mail: jakub.begera@cvut.cz, petr.manek@cvut.cz

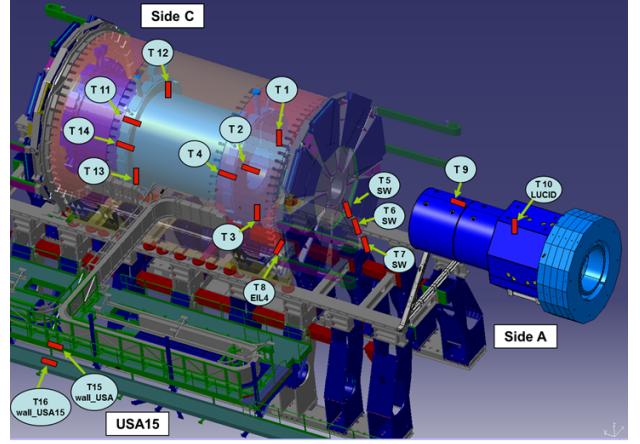


Fig. 1. Artistic view of the device positions of the ATLAS-TPX network in the ATLAS experiment.

- In the spectroscopic Time-over-Threshold (ToT) mode the energy deposition in the sensor material is measured.
- In the Time-of-Arrival (ToA) mode the time from an interaction with respect to the end of the exposure is recorded (precision up to 25 ns).
- In the counting mode, the number of interactions with energies above 5 keV during the exposure time are counted.

Data are taken in so-called frames, representing the counter contents of all individual pixels after an adjustable exposure time (often also referred to as frame acquisition time). In each frame, interacting quanta of ionizing radiation can be seen as tracks on the pixel matrix, which have characteristic shapes, depending on the particle range in silicon, its deposited energy, angle of incidence, and particle type [5].

## III. HARDWARE ARCHITECTURE

Given the harsh radiation environment within the ATLAS machine, ATLAS-TPX devices have to be connected to the rest of the system through a dedicated readout interface. This readout is a special hardware device that reads data and controls acquisition of the detector [6]. The ATLASPIX readout (see Fig. 2) was developed by modifying a regular FITPix readout [7].

The readout has two parts connected by four cables. The detector itself is positioned and oriented within the ATLAS machine (see Fig. 5), whereas the rest of the readout is placed in a nearby server room, shielded against ionizing radiation. Cables connect both parts, allowing protected hardware to

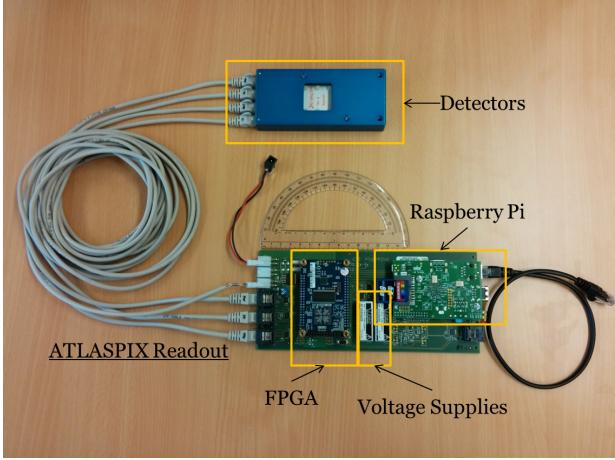


Fig. 2. ATLAS-TPX device, connected to its readout system through three Ethernet cables. The readout system consists of an FPGA, handling the device settings and operation, and a Raspberry Pi minicomputer for sending the data to the control PC in human readable format. Two voltage supplies are used for feeding the proper bias to each of the sensor layers.

control detectors remotely during operation of the machine. To manage multiple detectors simultaneously, a computer is directly connected to all readouts. This computer, also known as *the Control PC*, gathers all measured data and forwards commands from the system operator to the detectors through the ATLASPIX readout.

The Control PC (seen in Fig. 3) is connected directly to the ATLAS Network, which is isolated from the rest of CERN network infrastructure. Consequently, all communications outside the network have to utilize other systems. Acquisition control and real-time status monitoring of the network uses DCS (Detector Control System). Measured data is transferred to the EOS distributed storage system [8], [9]. Communication between components of the system is depicted in Fig. 4.

#### IV. ACQUISITION & CONTROL SOFTWARE

TODO Jakub

#### V. DATA ANALYSIS SUBSYSTEM

The Data Analysis Subsystem is comprised of virtual machines hosted at CERN Meyrin data center and managed by OpenStack private cloud. Each machine provides multitude of *worker nodes* responsible for parallel execution of queued *jobs* – mutually independent operations that interact with data files. Scheduling and completion of such jobs as well as the heartbeat and load of workers is continuously tracked by a single centralized *manager node*, which indirectly communicates with all workers through shared PostgreSQL database cluster.

The primary purpose of the subsystem is to provide reliable infrastructure for automated data evaluation. For reasons of stability, this task is performed asynchronously with respect to all incoming data. In addition to processing new frames, this approach allows data files to be reprocessed when novel analysis algorithms are introduced.

Frames taken by TPX detectors are temporarily retained at the Control PC, then transferred to the EOS shared disk pool

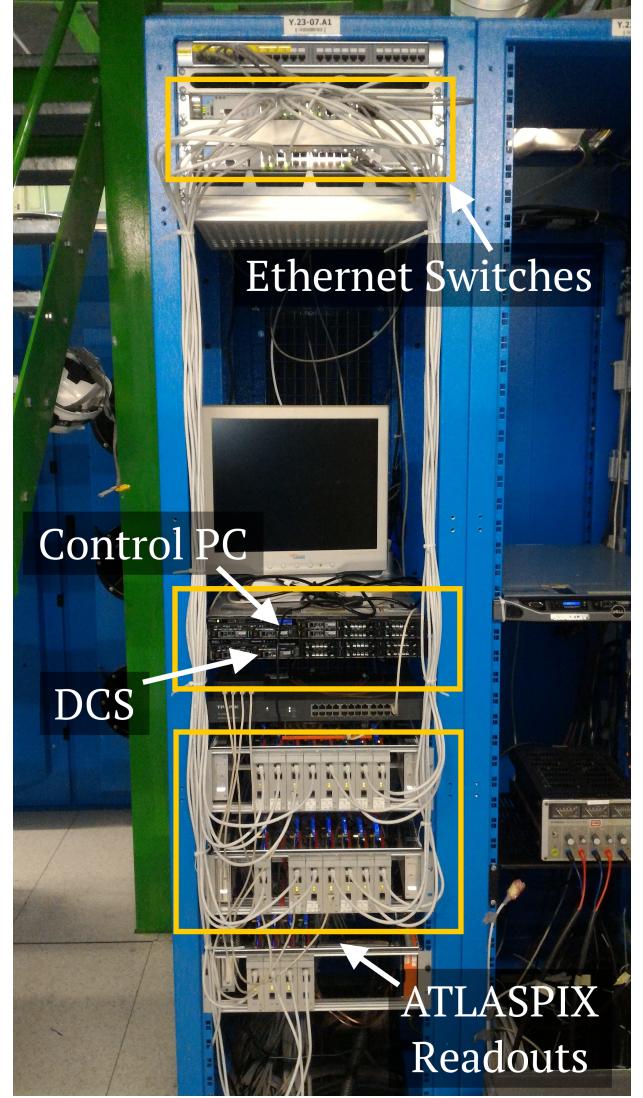


Fig. 3. ATLAS-TPX device, connected to its readout system through three Ethernet cables. The readout system consists of an FPGA, handling the device settings and operation, and a Raspberry Pi minicomputer for sending the data to the control PC in human readable format. Two voltage supplies are used for feeding the proper bias to each of the sensor layers.

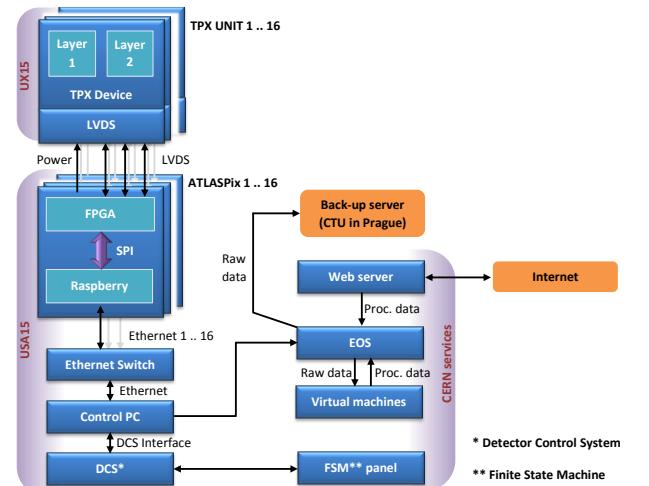


Fig. 4. Scheme of the readout, detector control, and data flow.

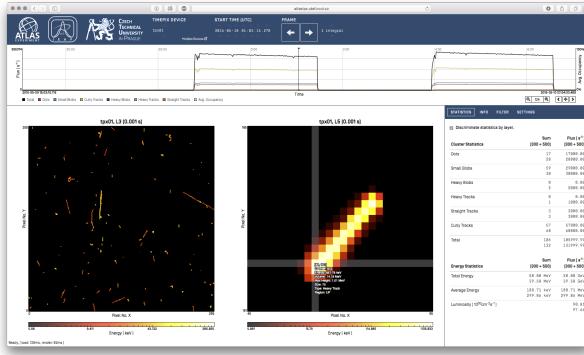


Fig. 5. Screenshot of the Data Visualization Application. [12] Top chart shows flux of characteristic traces in frames in specified time range, bottom charts show pixel matrices at a specified time.

storage in 1-hour batches. Once in EOS, data files become available to all users of the system. Even though subsequent analysis can be performed with the original data files, their storage format contains redundant information and is thus not optimal for long-running analysis tasks. For this reason, original data files are first processed and converted into better suited storage format. The conversion process is automatically scheduled as a job by the manager after the data is confirmed to be valid and no detector malfunctions are suspected. In the course of this operation, frames are subject to cluster analysis [5] and measurements are combined with energy calibration data [10]. Results of this process are stored back in EOS in format compatible with the ROOT Data Analysis Framework [11].

The produced files are utilized as a database by the Data Visualization Application. In addition, these files serve as a starting point for further analysis performed manually. The original data files are compressed and downloaded to backup archive media.

## VI. VISUALIZATION APPLICATION

Processed data can be examined directly from the ROOT files or by means of the Data Visualization Application. [12] This application features a web interface capable of displaying frames given specific detector, date and time. In addition, the application is capable of plotting fluxes of characteristic traces in specified time periods. See Fig. 5.

Since the data is visualized on client-side using modern rendering techniques, the application can also offer basic data operations such as cluster filtering, pixel masking, data aggregation and integral view.

The application serves mainly as a tool of manual inspection of the network operation history. It is openly available to the scientific community upon request.

## VII. CONCLUSION

The presented software can successfully control detector acquisition and retrieve, analyze and display frames from the ATLAS-TPX Network. All components of the system are fully operational. The Data Visualization Application is available to the scientific community upon request.

## REFERENCES

- [1] M. Campbell *et al.*, "Analysis of the Radiation Field in ATLAS Using 2008–2011 Data from the ATLAS-MPX Network," CERN, Geneva, Tech. Rep. ATL-GEN-PUB-2013-001, Apr 2013. [Online]. Available: <http://cds.cern.ch/record/1544435>
- [2] C. Leroy *et al.*, "Proposal to Measure Radiation Field Characteristics, Luminosity and Induced Radioactivity in ATLAS with TIMEPIX Devices," *ATLAS internal note*, ATLAS-COM-GEN-2014-005. [Online]. Available: <https://cds.cern.ch/record/1646970>
- [3] X. Llopert *et al.*, "Timepix, a 65k programmable pixel readout chip for arrival time, energy and/or photon counting measurements," *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 581, no. 1–2, pp. 485 – 494, 2007, VCI 2007: Proceedings of the 11th International Vienna Conference on Instrumentation . [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0168900207017020>
- [4] B. Bergmann *et al.*, "ATLAS-TPX: a two-layer pixel detector setup for neutron detection and radiation field characterization," *Journal of Instrumentation*, vol. 11, no. 10, p. P10002, 2016. [Online]. Available: <http://stacks.iop.org/1748-0221/11/i=10/a=P10002>
- [5] T. Holy *et al.*, "Pattern recognition of tracks induced by individual quanta of ionizing radiation in Medipix2 silicon detector," *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 591, no. 1, pp. 287 – 290, 2008, radiation Imaging Detectors 2007: Proceedings of the 9th International Workshop on Radiation Imaging Detectors. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0168900208004592>
- [6] D. Turecek, "Software for Radiation Detectors Medipix," Master's thesis, Czech Technical University in Prague, Czech Republic, 2011.
- [7] V. Kraus, M. Holik, J. Jakubek, M. Kroupa, P. Soukup, and Z. Vykydal, "FITPix — fast interface for timepix pixel detectors," *Journal of Instrumentation*, vol. 6, no. 01, p. C01079, 2011. [Online]. Available: <http://stacks.iop.org/1748-0221/6/i=01/a=C01079>
- [8] L. Mascetti, H. Gonzalez Labrador, M. Lamanna, J. Mościcki, and A. Peters, "CERNBox + EOS: end-user storage for science," *Journal of Physics Conference Series*, vol. 664, no. 6, p. 062037, Dec. 2015.
- [9] A. J. Peters and L. Janyst, "Exabyte Scale Storage at CERN," *Journal of Physics: Conference Series*, vol. 331, no. 5, p. 052015, 2011. [Online]. Available: <http://stacks.iop.org/1742-6596/331/i=5/a=052015>
- [10] J. Jakubek, "Precise energy calibration of pixel detector working in time-over-threshold mode," *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 633, Supplement 1, pp. S262 – S266, 2011, 11th International Workshop on Radiation Imaging Detectors (IWORLD). [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0168900210013732>
- [11] R. Brun and F. Rademakers, "ROOT — an object oriented data analysis framework," *Nuclear Instruments and Methods in Physics Research Section A: Accelerators, Spectrometers, Detectors and Associated Equipment*, vol. 389, no. 1–2, pp. 81 – 86, 1997, new Computing Techniques in Physics Research V. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S016890029700048X>
- [12] P. Manek, "Interactive Visualization System for Hybrid Active Pixel Detectors Within the ATLAS Experiment at CERN," Bachelor Thesis, Czech Technical University in Prague, Faculty of Electrical Engineering, 2016. [Online]. Available: <https://dspace.cvut.cz/bitstream/handle/10467/64670/F3-BP-2016-Manek-Petr-thesis.pdf>