Impact Protection Slab

Product Data Sheet no. 9301 - R-05
Issue: September 2026

EUROFLEX® Elastic Slabs are used as fall-impact protection surfacing in conformance with EN 1177:2018, EN 1176-1:2017 for fall heights up to 3,0m and under outdoor playground equipment in accordance with DIN EN 16630:2015-06 for fall heights 1,0 m up to 2,30 m or as elastic surfacing slabs on school recess areas. Conditionally resistant to spiked golf shoes or edge trim. Easy and inexpensive to install – with excellent dimensional stability due to integrated connector pins and interlocking masonry-style installation. EUROFLEX® Elastic Slabs are manufactured by an environment-friendly process and can be recycled as process raw material at the end of their service life. They can be played on under almost any weather conditions.

Benefits at a glance

Material


Material:

granulated recycled rubber
Binding agent: MDI polyurethane

Product design

Colours:	red, green, grey or black (minor colour variations and/or fading possible.)

Colours:

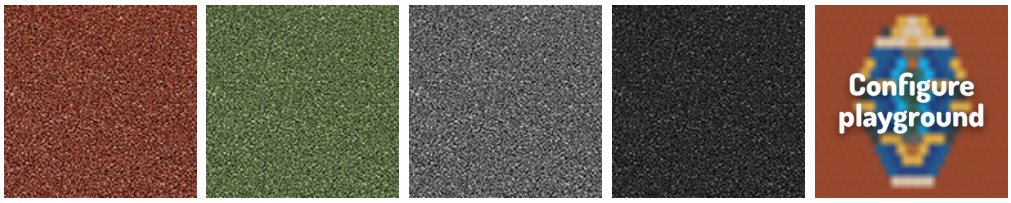

red, green, grey, black, Configure playground

Surface:	smooth with open pores
Lower side:	dimple-textured (for drainage)

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel
Fon +49-(0)8683-701- 199 · Fax +49-(0)8683-701-4-199
euroflex@kraiburg-relastec.com · www.kraiburg-relastec.com/euroflex

Made in Germany
qualityaustria SYSTEMZERTIFIZIERT
ISO 9001:2015 NR. 00186/0
ISO 14001:2015 NR. 05343/0
ISO 50001:2018 NR. 00070/0

Product Data Sheet no. 9301 - R-05
Issue: September 2026

Dimensions / Tolerances / Weight

Dimensions [mm] / weight [kg] / max. fall height [m]:	**30 mm** / 1.00 m / ca. 5.2 kg **40 mm** / 1.20 m / ca. 6.5 kg **50 mm** / 1.50 m / ca. 7.5 kg **55 mm** / 1.60 m / ca. 8.1 kg **60 mm** / 1.70 m / ca. 9.0 kg **70 mm** / 2.10 m / ca. 10.4 kg **80 mm** / 2.40 m / ca. 12.0 kg **60+20 mm Softsystem** / 2.60 m / ca. 9.3 kg **70+20 mm Softsystem** / 3.00 m / ca. 10.7 kg
Dimensions [mm]:	500 x 500 500 x 250 1.000 x 500 (only for 40 mm)

Product Testing

General Information:	Production facility inspection
Permissible fall height:	in accordance with DIN EN 1177:2018, EN 1177:2018
HIC 1000:	DIN EN 1176-1:2017, EN 1176-1:2017
Abrasion resistance:	rV 5,9 (DIN 18035) BS 7188-4 Migration of certain elements in accordance with EN 71-3:2013 - passed
Fire resistance:	Class E (DIN EN 13501-1, 2010)
Tensile strength:	min. 0,75 N/mm² EN-DIN-ISO 1798-2008 (DIN 53571)
Elongation at break:	approx. 40 % EN-DIN-ISO 1798-2008 (DIN 53571)
Chemical resistance:	conditionally resistant to acids and bases
Salt water resistance:	resistant in accordance with DIN EN ISO 175, DIN EN ISO 3386-2
UV resistance:	resistant in accordance with DIN EN 1297, DIN EN ISO 3386-2
Resistance to chlorine:	resistant in accordance with DIN EN ISO 175, DIN EN ISO 3386-2
Cold fracture resistance:	24h / -40°C, no fracture

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel
Fon +49-(0)8683-701- 199 · Fax +49-(0)8683-701-4-199
euroflex@kraiburg-relastec.com · www.kraiburg-relastec.com/euroflex


Made in Germany
qualityaustria SYSTEMZERTIFIZIERT
ISO 9001:2015 NR. 00186/0
ISO 14001:2015 NR. 05343/0
ISO 50001:2018 NR. 00070/0
IQNet
TÜV SÜD

Product Data Sheet no. 9301 - R-05
Issue: September 2026

Cold crack resistance:	5h / -30°C, no cracks
Skid resistance:	wet: 50,75, dry: 50 in accordance with ASTM E 303
Water permeability:	40 mm slab: 0,011 gpm/in³ 70 mm slab: 0,015 gpm/in³
Critical Radiant Heat Flux:	0,08 Watts/cm³ in accordance with ASTM E 648/03

Installation

Pour level layer of lean concrete or crushed rock over frost-stable sub grade.
If the surface covered is an existing concrete or asphalt surface, take care to provide sufficient slope for water drain-off and level off any irregularities.
Use edge slabs and corner slabs around the surface to minimize the danger of stumping. Install the slabs in a masonry-type configuration, i.e. beginning every second row with a half slab. Insert connector pins fully into the receiving holes. To ensure secure placement, cement the crosswise joints of the first and the last row. The cement used should be a 1-component PU adhesive cement. Cut slabs to size using a powered sabre saw.
Note the complete Installation instruction
Installation picture:

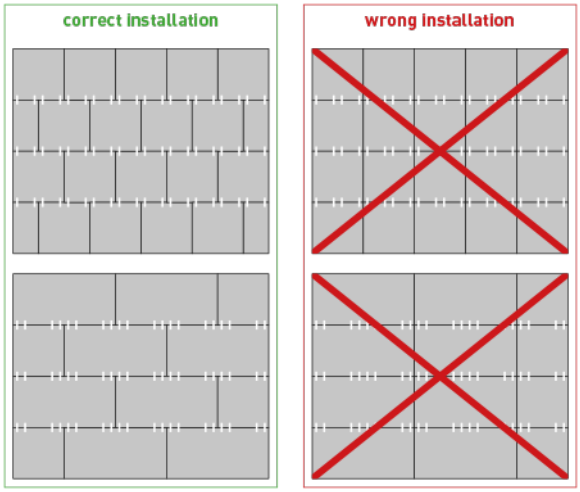

Other

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel
Fon +49-(0)8683-701- 199 · Fax +49-(0)8683-701-4-199
euroflex@kraiburg-relastec.com · www.kraiburg-relastec.com/euroflex

Made in Germany
qualityaustria SYSTEMZERTIFIZIERT
ISO 9001:2015 NR. 00186/0
ISO 14001:2015 NR. 05343/0
ISO 50001:2018 NR. 00070/0

Other:	plastic connector pins included

PDF-Verlegeanleitung Softsystem

Installation instruction Softsystem PDF:	https://www.kraiburg-relastec.com/euroflex/wp-content/uploads/sites/3/2025/09/II_EUROFLEX_Impact_Protection_Slabs_Softsystem.pdf

KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Straße 4 · D-29410 Salzwedel
Fon +49-(0)8683-701- 199 · Fax +49-(0)8683-701-4-199
euroflex@kraiburg-relastec.com · www.kraiburg-relastec.com/euroflex

Made in Germany
qualityaustria SYSTEMZERTIFIZIERT
ISO 9001:2015 NR. 00186/0
ISO 14001:2015 NR. 05343/0
ISO 50001:2018 NR. 00070/0