




BATTERY




BOOT_SEL

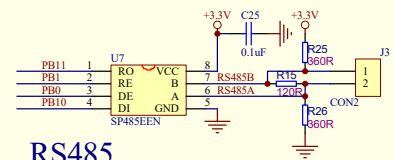


RS485

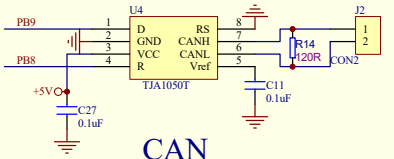

CAN





USER_LED

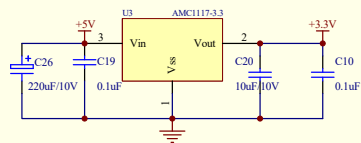

POWER





RS232

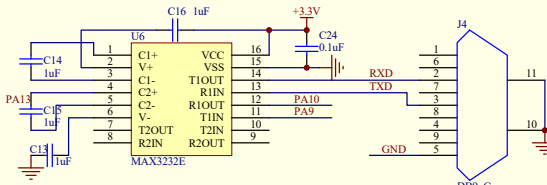



WIFI-ESP8266

| MODE | BOOT0 | BOOT1 |
|-------|-------|-------|
| FLASH | 0 | X |
| ISP | 1 | 0 |
| SRAM | 1 | 1 |


BOOT_MODE

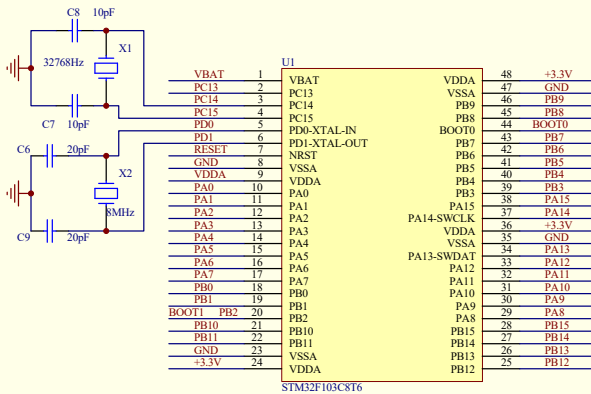


STM32F103C8T6




I/O



POWER

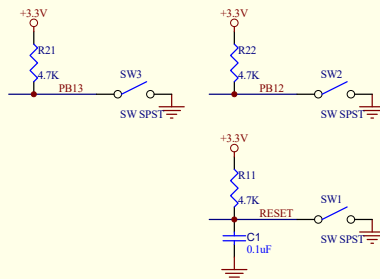

KEY

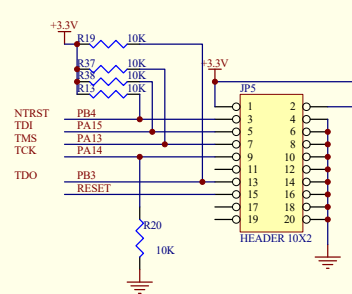

JTAG

| | | |
|-------|--|----------|
| Title | | |
| Size | Number | Revision |
| E | | |
| Date: | 19-Mar-2019 | Sheet of |
| File: | H:\STM32系列\stm32f103c8t6\STM32F103C8T6\STM32F103C8T6GK.DOC | |