





C7S

CASCOS 
13970



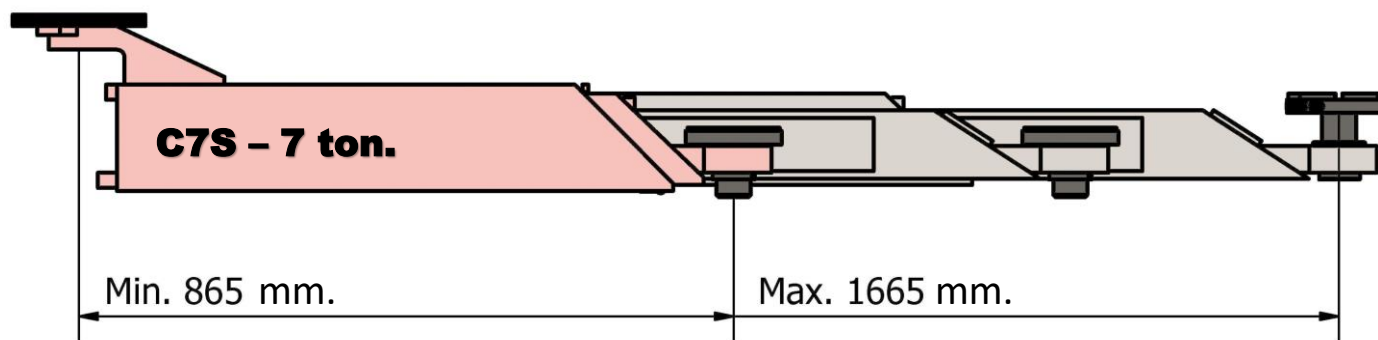





C7S

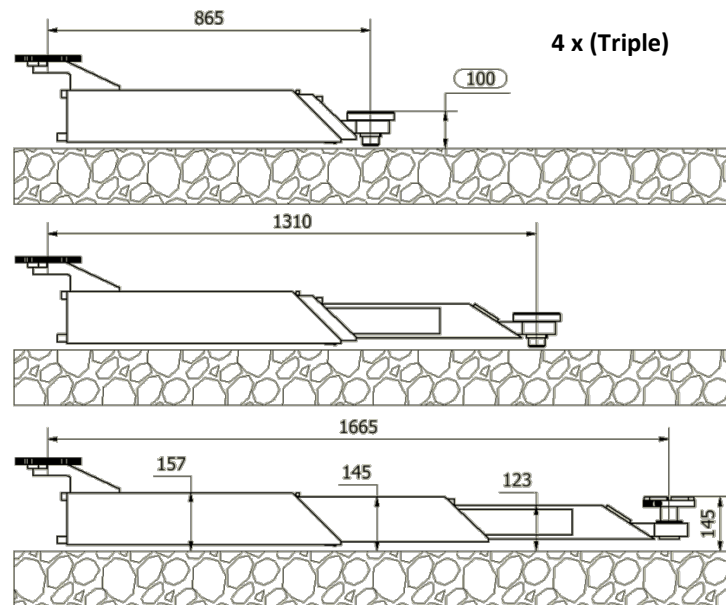

4 x (Triple)



CASCOS 13970

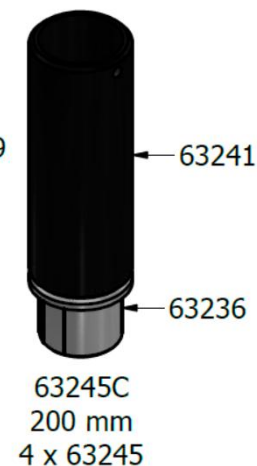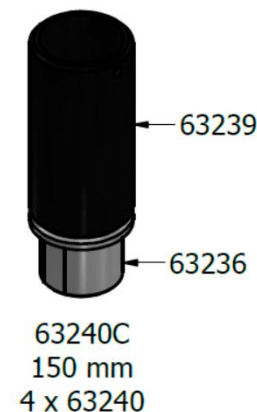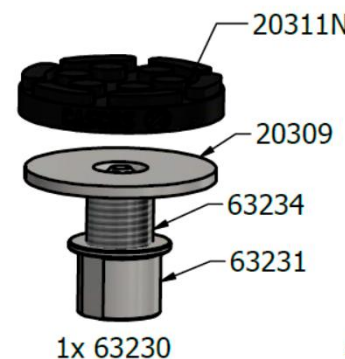

Enchufe integrado en fábrica
*Integrated power plug
Assembled in factory
Prise de courant intégrée
Assemblé en usine*




Kit magnético de aire
*Magnetic air Kit
Connecteur d'air magnétique
Ref. 26.177*

**63250C
C7S
Soporte Magnético
Magnetic Holder**



Soporte magnético para herramientas
*Magnetic holder for tools
Porte-outils magnétique
Ref. 26.141*

REF: 15855 - KIT DOBLE BOTONERA ELEVADORES CONSUL


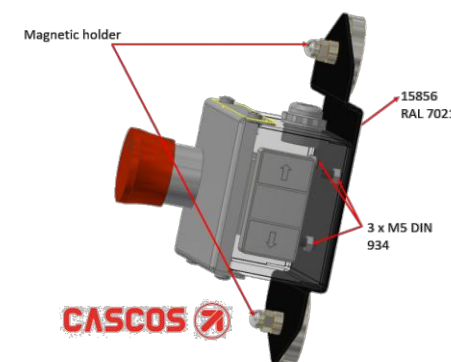


CASCOS 




CASCOS 

C7S 13970

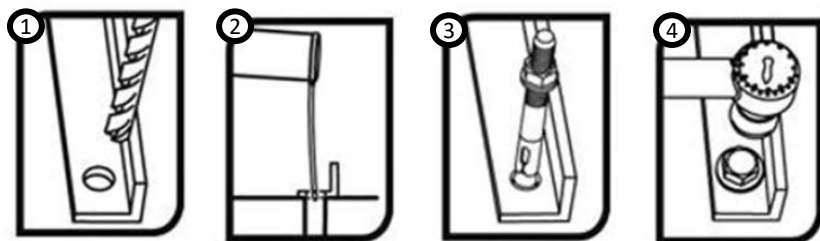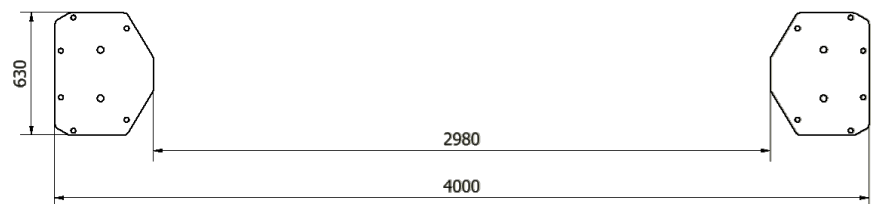

Calidad del Hormigón: C20/25
Concrete quality: C20/25

Min. 80cm



Lifts:	Type:	Manufacturer: Description of type: Piece:	Torque during anchorin g:	Individual fundaments Fundament dimensions:	Concrete floor (hall floor) Fundament- characteristics		Power values
C7S	13970	Shear connector Hilti HVA/HAS-M16x125 (12 Stück)	80 Nm	150 cm 150 cm	21 cm C 20/25	12,5 cm	400 V/ 50 Hz/ 3x25 A 3x20 A
The setting up of the lifts is only admissible and will only be carried out if the minimum requirement on the fundaments indicated are fulfilled at the place of setting up. The bolt manufacturers' instructions must be followed! Subject to change without prior notice! Date: 06.01.2015							

Ref.


13970

7.000 kg.

1.350 kg.

400/230V – 5+5Kw

45"

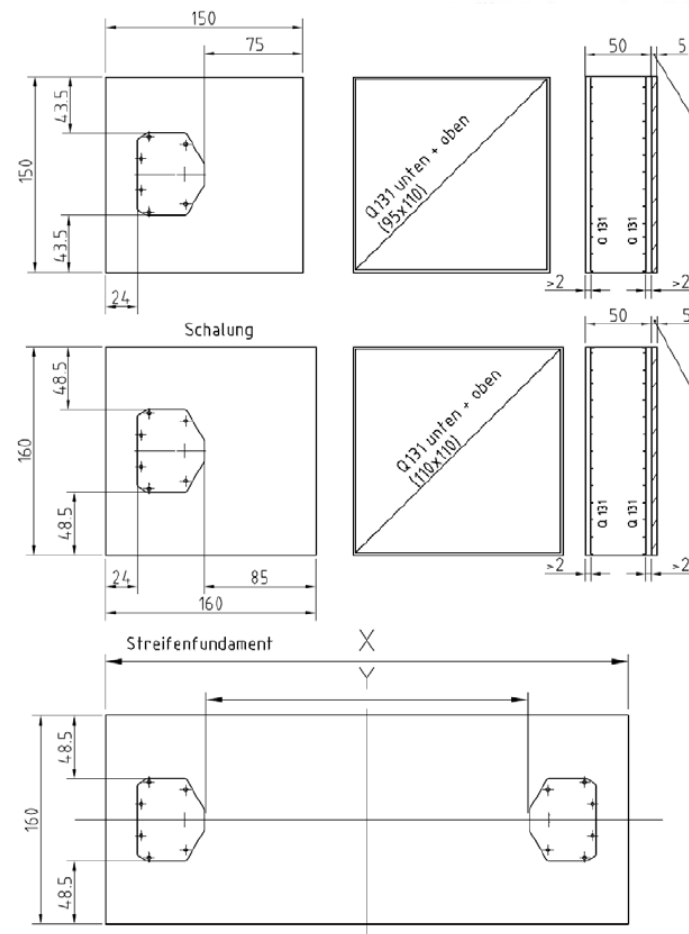

Underground concrete without
damages
Permissible $\sigma_{B} \geq 200 \text{ kN/m}^2$
C20/25 BST 500 M
Concrete floor > 2,0 cm

Hormigón sin daños
 σ_{B} admisible $\geq 200 \text{ kN/m}^2$
C20/25 BST 500M
Suelo de hormigón > 2,0 cm

Dimensions in cm!
¡Dimensiones en cm!

Underground concrete without
damages.
Permissible $\sigma_{B} \geq 150 \text{ kN/m}^2$
Concrete floor > 2,0 cm
Hormigón sin daños
 σ_{B} admisible $\geq 150 \text{ kN/m}^2$
C20/25 BST 500M
Suelo de hormigón > 2,0 cm

C7S (Ref 13970) :
X= 4480 mm
Y= 2980 mm