





C5.5S GLOBAL

CASCOS 
13974




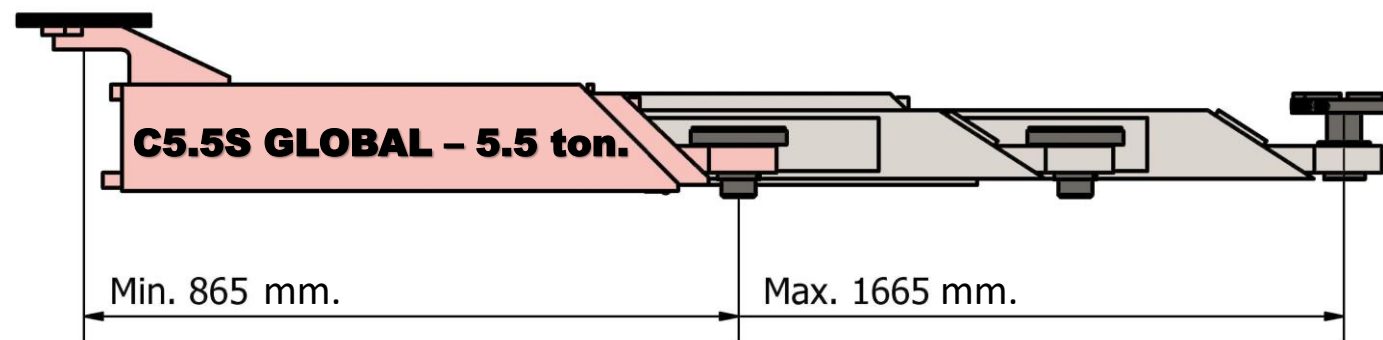

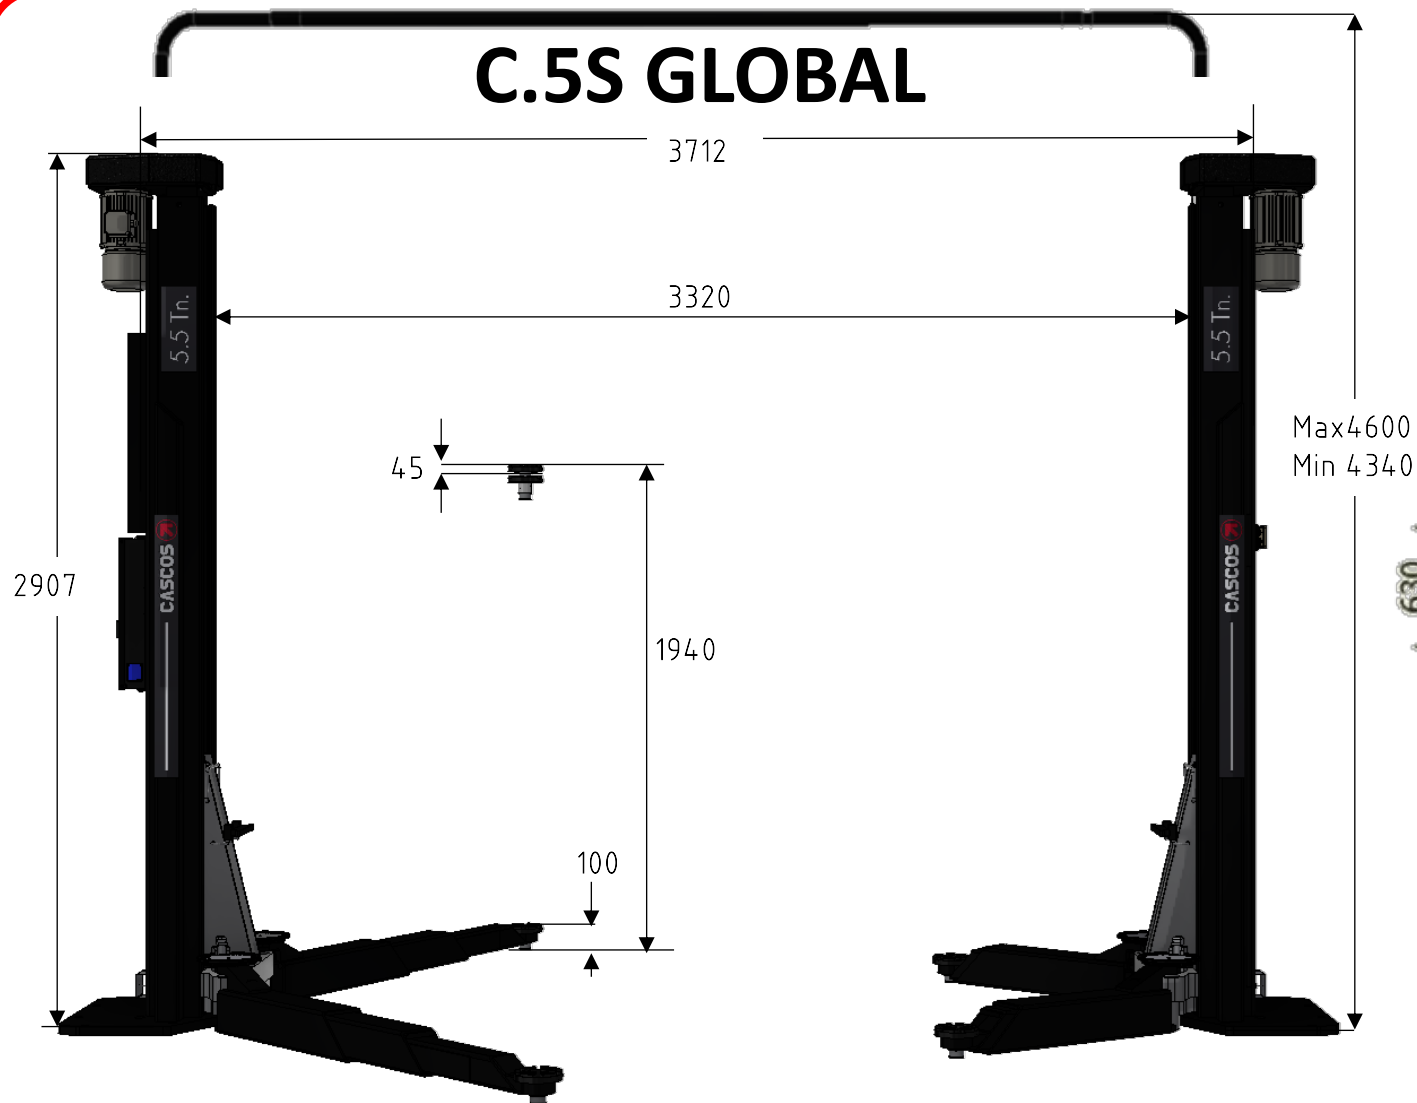


C.5S GLOBAL

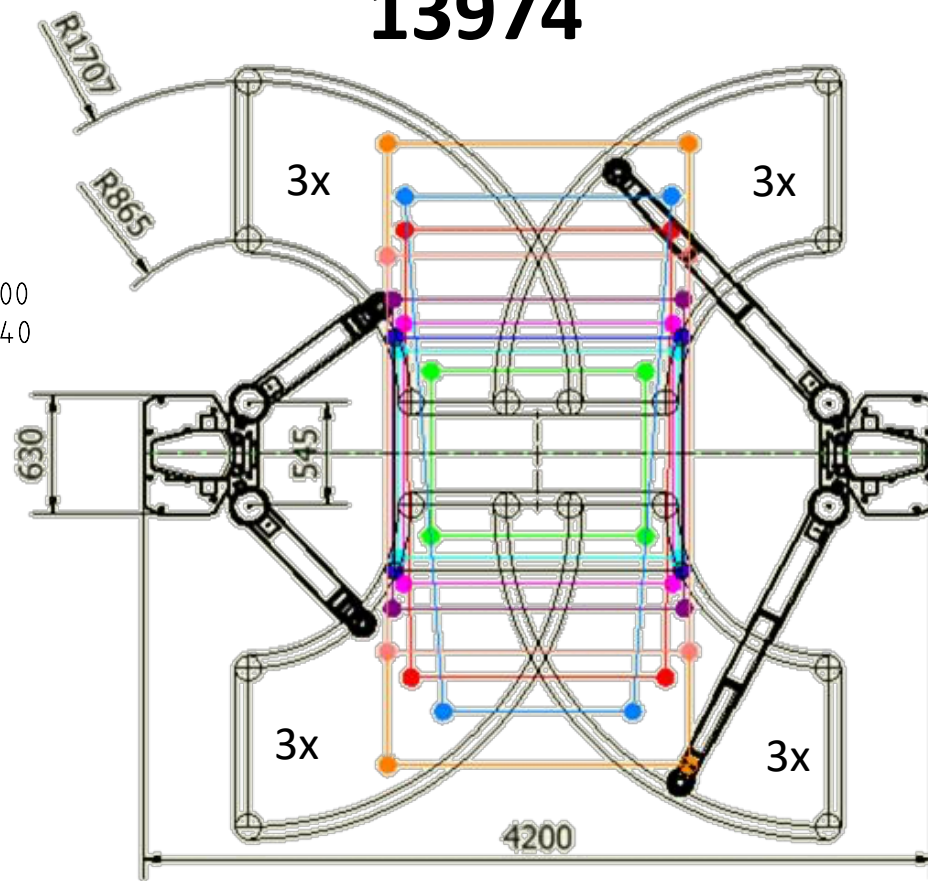

CASCOS 


13974







-  Volkswagen Crafter L5F/Q+4x4-2
-  Volkswagen Crafter L3 F-Q + 4x4
-  Mercedes VITO
-  BMW X5
-  Smart for two



C5.5S GLOBAL

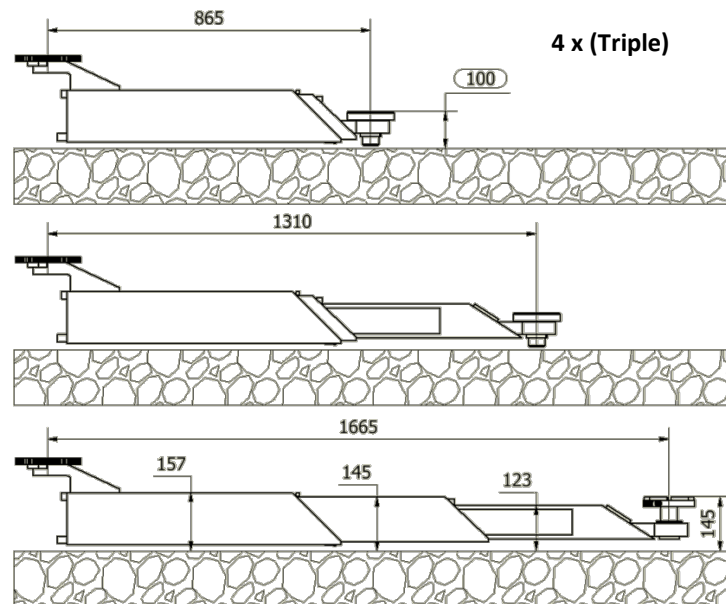

CASCOS 
13974

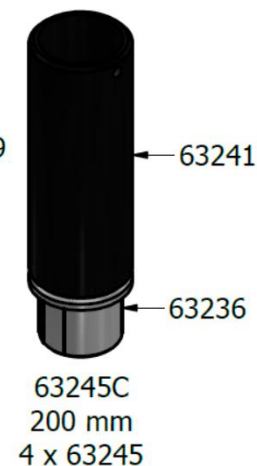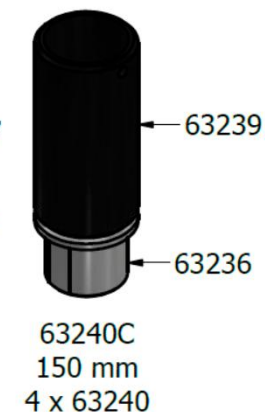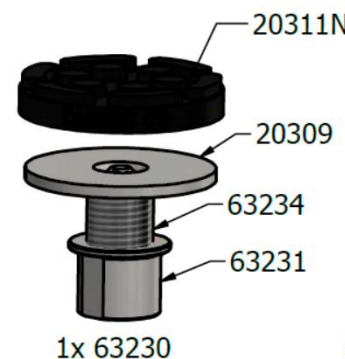

**Enchufe integrado
en fábrica**
*Integrated power
plug
Assembled in factory
Prise de courant
intégrée
Assemblé en usine*




**Kit magnético
de aire**
*Magnetic air Kit
Connecteur d'air
magnétique
Ref. 26.177*

**63250C
C5.5S GLOBAL
Magnetic Holder**





**Soporte
magnético para
herramientas**
*Magnetic holder
for tools
Porte-outils
magnétique
Ref. 26.141*

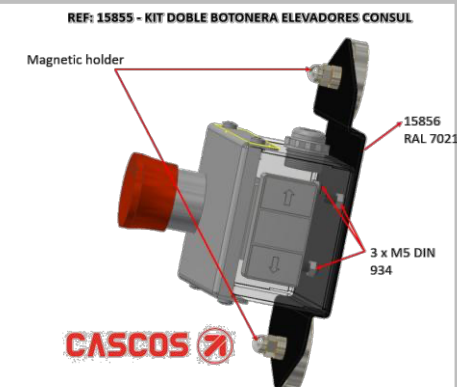




CASCOS

C5.5S GLOBAL 13974

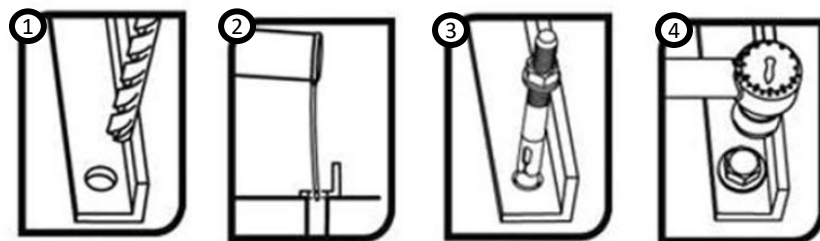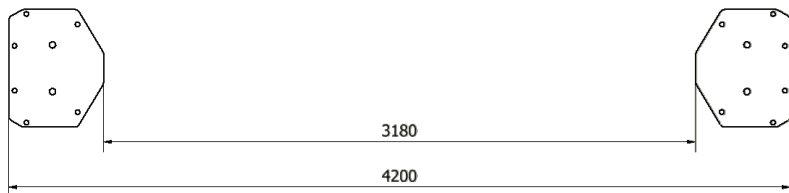

Calidad del Hormigón: C20/25
Concrete quality: C20/25

Min. 80cm



Lifts:	Type:	Manufacturer: Description of type: Piece:	Torque during anchorin g:	Individual fundaments Fundament dimensions:	Concrete floor (hall floor) Fundament- characteristics	Power values
C5.5S GLOBAL	13974	Shear connector Hilti HVA/HAS-M16x125 (12 Stück)	80 Nm	150 cm 150 cm	21 cm C 20/25	12,5 cm 400 V/ 50 Hz/ 3x25 A 3x20 A
The setting up of the lifts is only admissible and will only be carried out if the minimum requirement on the fundaments indicated are fulfilled at the place of setting up. The bolt manufacturers' instructions must be followed! Subject to change without prior notice! Date: 06.01.2015						

Ref.


13974

5.500 kg.

1.350 kg.

400/230V – 5+5Kw

45"

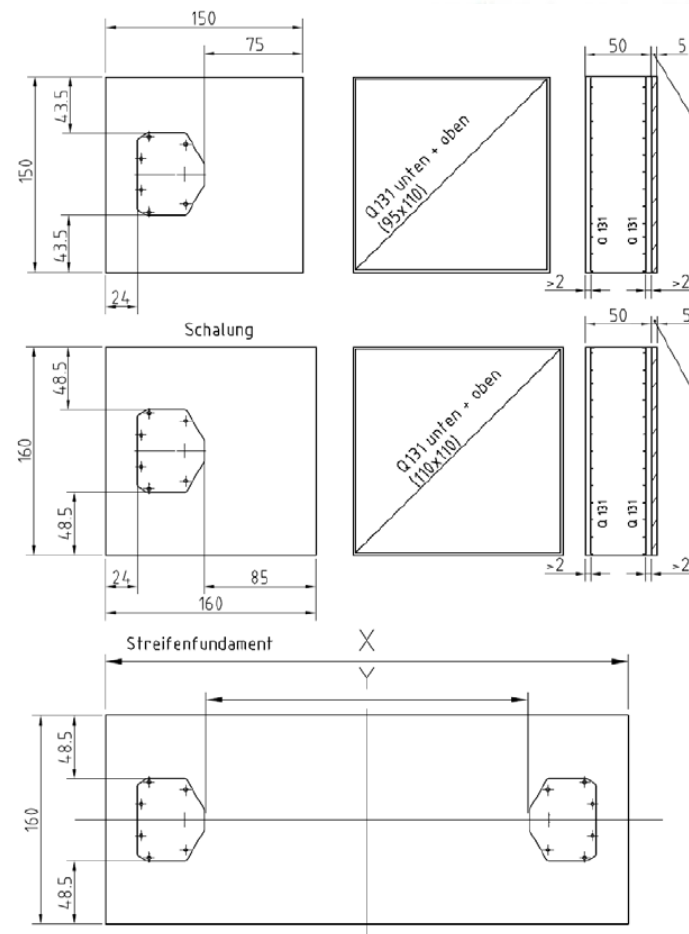

Underground concrete without
damages
Permissible $\Sigma B \geq 200 \text{ kN/m}^2$
C20/25 BST 500 M
Concrete floor $> 2,0 \text{ cm}$

Hormigón sin daños
 ΣB admisible $\geq 200 \text{ kN/m}^2$
C20/25 BST 500M
Suelo de hormigón $> 2,0 \text{ cm}$

Dimensions in cm!
¡Dimensiones en cm!

Underground concrete without
damages.
Permissible $\Sigma B \geq 150 \text{ kN/m}^2$
Concrete floor $> 2,0 \text{ cm}$
Hormigón sin daños
 ΣB admisible $\geq 150 \text{ kN/m}^2$
C20/25 BST 500M
Suelo de hormigón $> 2,0 \text{ cm}$


C5.5S GLOBAL (Ref 13974):

X=4680mm
Y=3180mm



CASCOS 

3,2 ton.




C3.2S – 13120SE



C3.2SCONFORT – 13120SC

C3.2SVS – 13120SVS

3,5 - 4 ton.




C3.5S – 13169

C3.5SXL – 13169-4


C4S – 13194S

C4SXL – 13194S-4E


(*) EVA 2x1 by CASCOS 

C4SXLSVS- 13194SVS-4E (*)EVA 2x1 by CASCOS 

5 – 5,5 ton.



C5.5S – 13998S




C5.5SWAGON – 13988S



C5SWAGON – 13177

5,5 - 7 ton.



C5,5S GLOBAL – 13974

C7S – 13970