






C3.2S CONFORT


CASCOS **(7) 13120SC**

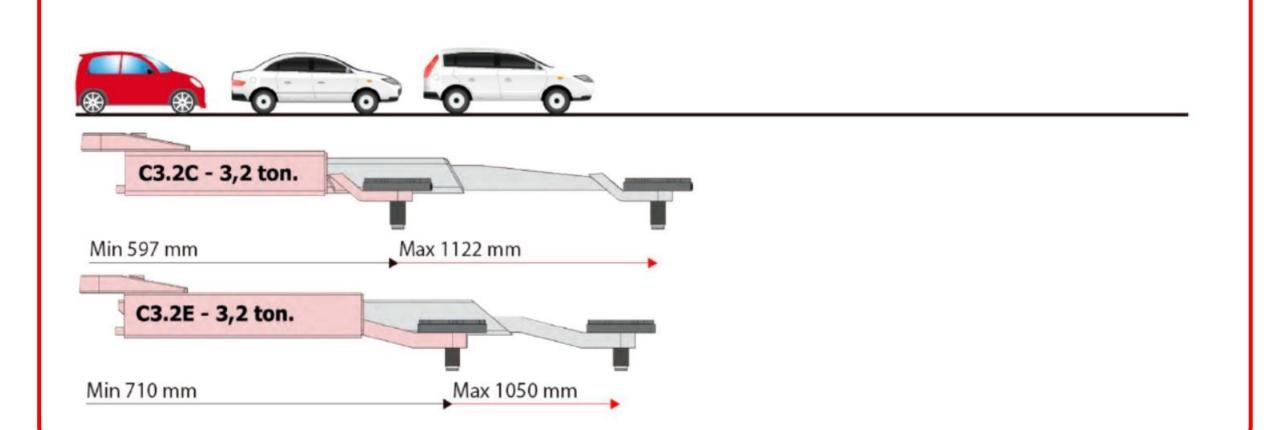





C3.2S CONFORT









CASCOS 🤊 13120SC

			t pads / Rallo					
	Ref.	Ton.	Elevador /	/ Lift / Pont élévateur	H-ext	H min.	H max	
	20649		13120E	C3.2	_	164	201	
		3.2	13120C	C3.2 CONFORT	60 –	164	201	
Т			13120SE	C3.2 SYNC	-	164	201	
-			13120SC	C3.2 SYNC CONFORT	_	164	201	REMEMBERS MEMBERS MEMBERS
	20650	3.2	13120E	C3.2	_	204	241	
			13120C	C3.2 CONFORT	100 –	204	241	CAMPAGE AND DESCRIPTION OF THE PARTY OF THE
₩.			13120SE	C3.2 SYNC	_ 100	204	241	
			13120SC	C3.2 SYNC CONFORT		204	241	
	20651	3.2	13120E	C3.2	200 -	304	341	
			13120C	C3.2 CONFORT	200	304	341	
			13120SE	C3.2 SYNC		304	341	CHICKLES HOW THE SHEET
L			13120SC	C3.2 SYNC CONFORT	_	304	341	



Enchufe integrado en fábrica

Integrated power plug Assembled in factory Prise de courant intégrée Assemblé en usine



Kit magnético de aire Magnetic air Kit Connecteur d'air magnétique Ref. 26.177





Soporte magnético para herramientas Magnetic holder for tools Porte-outils magnétique

REF: 15855 - KIT DOBLE BOTONERA ELEVADORES CONSUL Magnetic holder




® t


45"








C3.2S CONFORT 13120SC

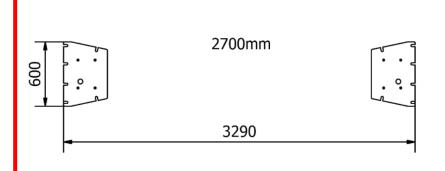










Ref.


13120SC



<u>kg</u>∖

3.200 Kg.

590 Kg.

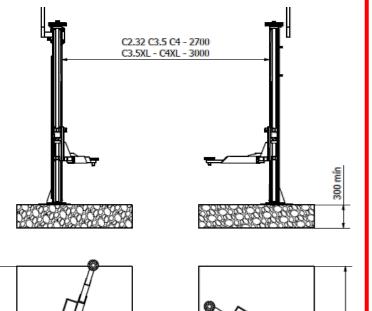

400/230V - 2.2+2.2kW


1500


KIT Anchor bolts	Model	Max load Capacity (Ton)	Anchor Bolt type	Ø (mm)	(N*m)	Reference		Anchor Min. Tensile Strength (Kg)	Concrete quality	Optimal Concrete thickness (mm)	Min. Concrete thickness (mm)
17232S	C2.32SC	3,2	M16x145	16	120	10549	12	3400	C20/25	200	170







CASCOS 🤊

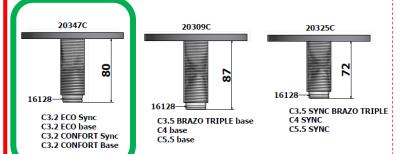






C4 SYNC - 23529







C4SXL SVS