Operation Procedure of PC Tester

Step 1:

    Take the GPS receiver outside where it has a clear view of the sky and away from tall trees, buildings, or other obstructions.
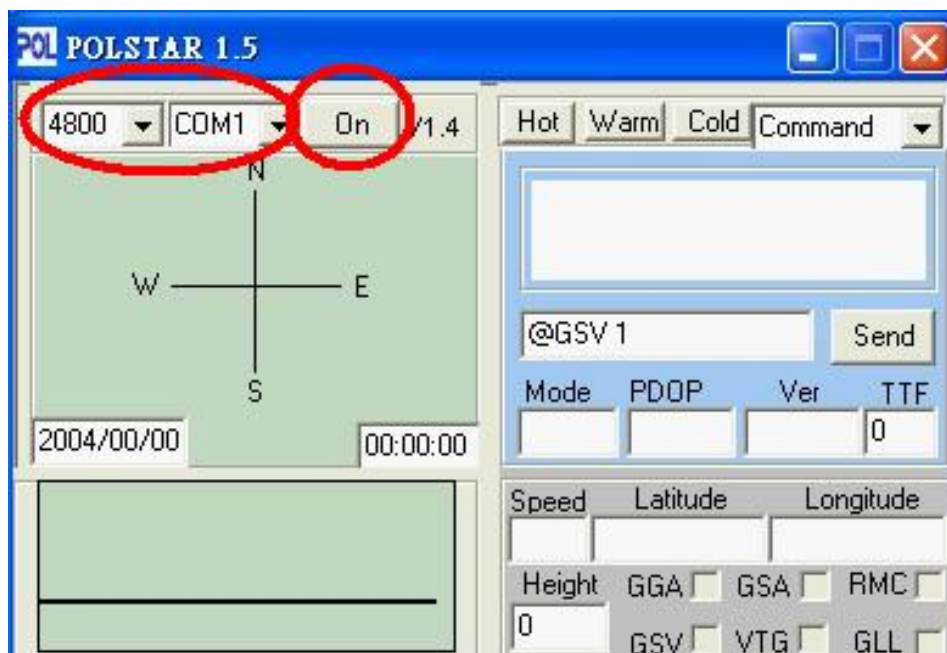
Step 2:

    Execute the PCTester tool on PC.

Step 3:

    Set baud rate (4800) and com port (output port)
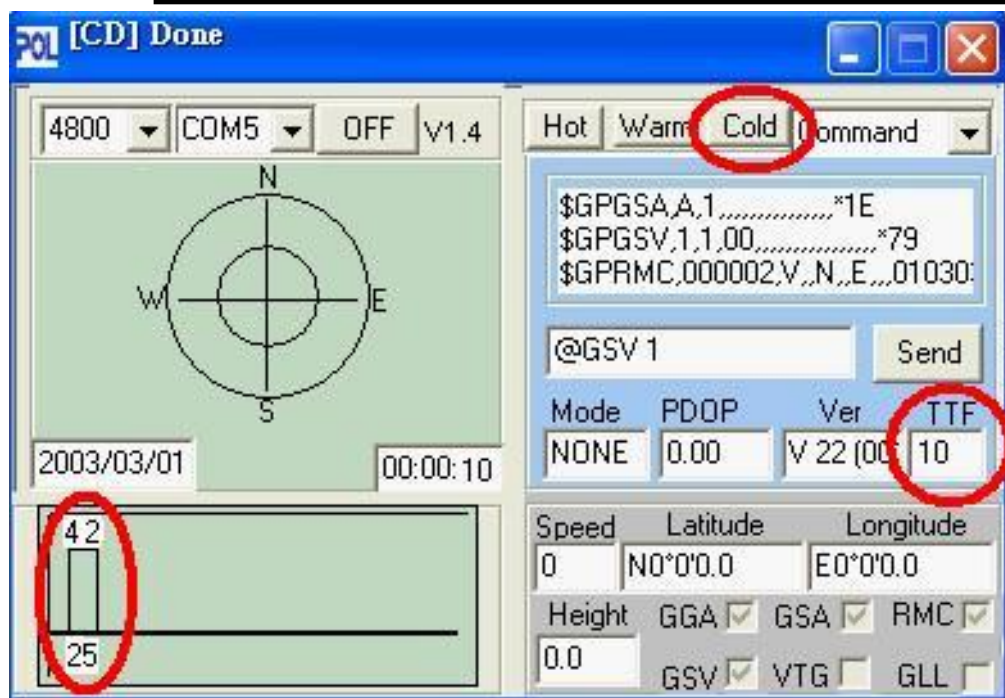
Step 4:

    Click "on" icon

Step 5:

    Tap on *"cold"* icon when you see the NMEA message running and then you can see the date changed to 2003/03/01 that means the *cold start* command is processed properly.

Note:
   1. If the string with $GP(NMEA message) is running, but can not see the satellite
   numbers and the column bars, please tap the **send** icon to execute @**GSV1** command
   then the satellite number and the column bar will appear.

   2. Make sure the numbers of satellite are greater than 3 and the strength of satellite
   signal are greater than 40, and then GPS receiver should get fix within 3 minutes.