



# Wheel Loader Boom Mowers

Attach to  
any BRAND



Universal engine  
control module with  
Electronic Joystick.



ROTARY  
AND  
FLAIL

DURABILITY INNOVATION  
COMMITMENT



# Features

The Tiger Bengal series boom mower can be attached to a wide variety of wheel loaders. The wheel loader must have a minimum GVW of 25,000 lbs or a Lift Capacity of 10,000 lbs. Available with Left Hand or Right Hand operation, the boom unit features a totally independent auxiliary engine capable of delivering all the cutting power, needed for your toughest jobs. This unit is built and designed to allow the operator to achieve maximum performance in all types of vegetation.

Simply add the mating half of the loader's Quik-Attach system and easily go from bucket work to a boom mower in minutes.



## AUXILIARY ENGINE SPECIFICATION

Engine Make	Cummins
Engine Model	QSF 2.8 (Tier 4 Final)
Engine Type	4 cyl., Turbo Diesel
Power Rating	74 HP @ 1,800 RPM
Boom Controls	Electronic Joystick

Contact your dealer about setting up this unit with a Quick-Attach coupler system from the following companies.

## COUPLER BRANDS

ACS® Industries,  
AIM, Balderson,  
Case, CAT® Fusion,  
Dymax, JRB and  
Oil Quick.



## CUTTER HEADS

Rotary	50" or 60"
Flail	50" or 63"

## BOOM SPECIFICATION


BENGAL	19	24	25
A- Reach Out	18.9'	23.9'	24.9'
B- Reach Out @Max. Down	9.7'	12.1'	13.2'
C- Reach Down	9.3'	13.1'	13.7'
D- Reach Up	16.6'	21.2'	22.0'
E- Reach Out @Max. Up	8.8'	10.4'	11.5'
F- Reach In	6.7'	6.8'	7.1'
G- Ground Level	2.0'	2.0'	2.0'

(All dimensions in feet w/ 50" rotary head)

\*Specifications are subject to change based on wheel loader make & model\*

Optional equipment maybe shown.

\*\* CAB SAFETY SCREEN NOT PROVIDED \*\*

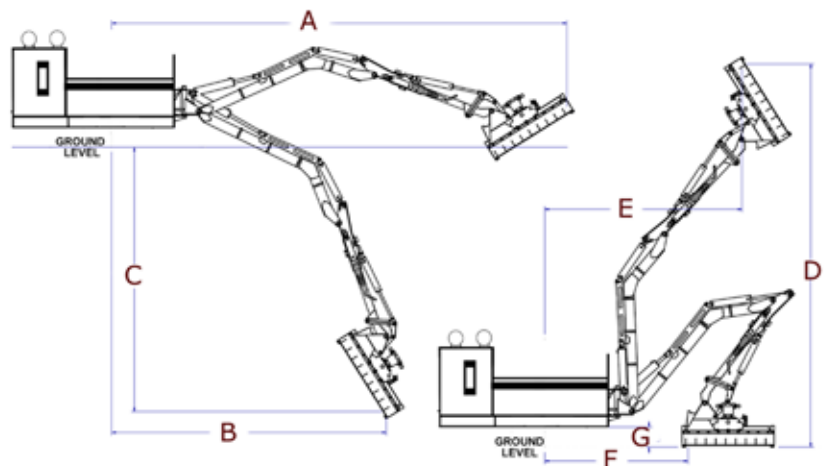

An Alamo Group® Company  
© 2015 Tiger Corporation, All Rights Reserved  
Printed in the USA



Tiger Corporation  
3301 North Louise Ave  
Sioux Falls, South Dakota 57107  
800.843.6849  
www.tigermowers.com

Dealer Info: