



Tank access cover



Large fill port



Manual product valve



Hose reel and wand



K 5 Emulsion Applicator

The K 2 and K 5 Emulsion Applicators provide high-performance reliable heating and application of bituminous emulsions and tack coats. From the large maintenance hatch and 7 gauge steel tank to the reliable torsion axles, the K Series is built to get the job done with operator friendly features and long service life.

**Fuel Saving Flue Design-** Save fuel and heat more efficiently with the unique “S-type” internal flue design. The “S” Design allows for better heat distribution and efficiency throughout the tank. This conserves fuel by almost 50% as compared to less efficient “U” designs.


**250 and 500 gallon capacities:** Choose the model that is right for the job. The K 5 is the workhorse and can handle large or small jobs. The K 2 offers all the features of the 5 but on a smaller single axle platform.

**“Eco-Friendly” Clean out -** Both models are equipped with large solvent and Waste tanks. With a turn of the product valve, complete flush out of the plumbing system is achieved. The on-board Waste Tank allows storage of waste solvents until you can properly dispose of it back at the shop.


**Folding Spray bar -** The optional folding spray bar can cover an 8’ swath in a single pass. Fold one side up to cover smaller areas. Hand valves at each nozzle allow the spray width to be customized in one foot increments.



On-Board solvent and flush tanks

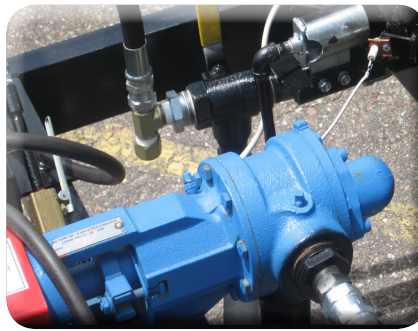


Gear pump for application and recirculation

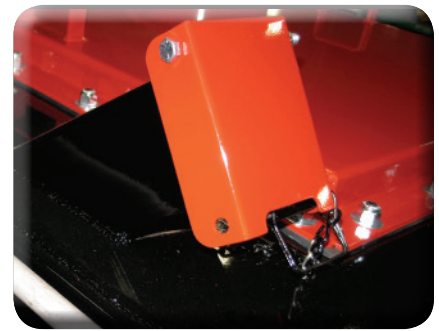

Wand recirculation port



Optional spray bar attachment

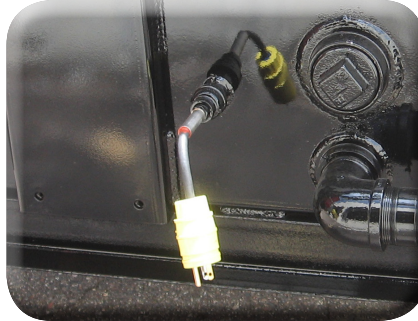

Optional overnight heater



Standard torsion axles

# SPECIFICATIONS:

## K 2

## K 5

Emulsion Capacity (US gallons):	250	500
Engine:	5HP Gas Honda	5HP Gas Honda
Heating Method (overnight):	Electric Probe (option)	Electric Probe (option)
Heating Method (operating):	Single "S type" Flue w/burner	Dual "U type" Flue w/burners
Heat Rating (BTU's):	80,000	80,000 x 2
Material Pump (GPMS):	15	15
GVWR (lbs):	3700	6500
GAWR (lbs):	4000	2 x 4000
Axle/Suspension:	1 (torsion type)	2 (Torsion type)
Brake Type:	Electric	Electric
Application Wand/ Hose:	72" aluminum (50ft on Hose Reel)	72" aluminum (50ft on Hose Reel)
Loading Ports:	10" (vented and lockable)	10" (vented and lockable)
Fuel Capacity:	2 Gallons	2 Gallons
Maintenance Hatch (l x w):	36" x 22"	36" x 22"
Trailer Construction:	5" channel	5" channel
Gravity Drain Valve:	2"	2"
Temperature Gauge:	2"	2"
Solvent Flush/ Waste Tank Capacity:	6 gallons	11 gallons
Dimensions (l x w x h)	130" x 76" x 67"	130" x 79" x 67"
Shipping Weight (lbs):	1600	2300
Warranty:	One Year	One Year

Distributed By:

Due to continuous improvement, specifications are subject to change without notice.

## Other Products from CPMG



Spray Injection Patchers



Emulsion Storage



Crack Sealers

## FULL PRODUCT LINE



800-328-3874

**HINES**  
CORPORATION  
COMPANY



cimlinepmg.com