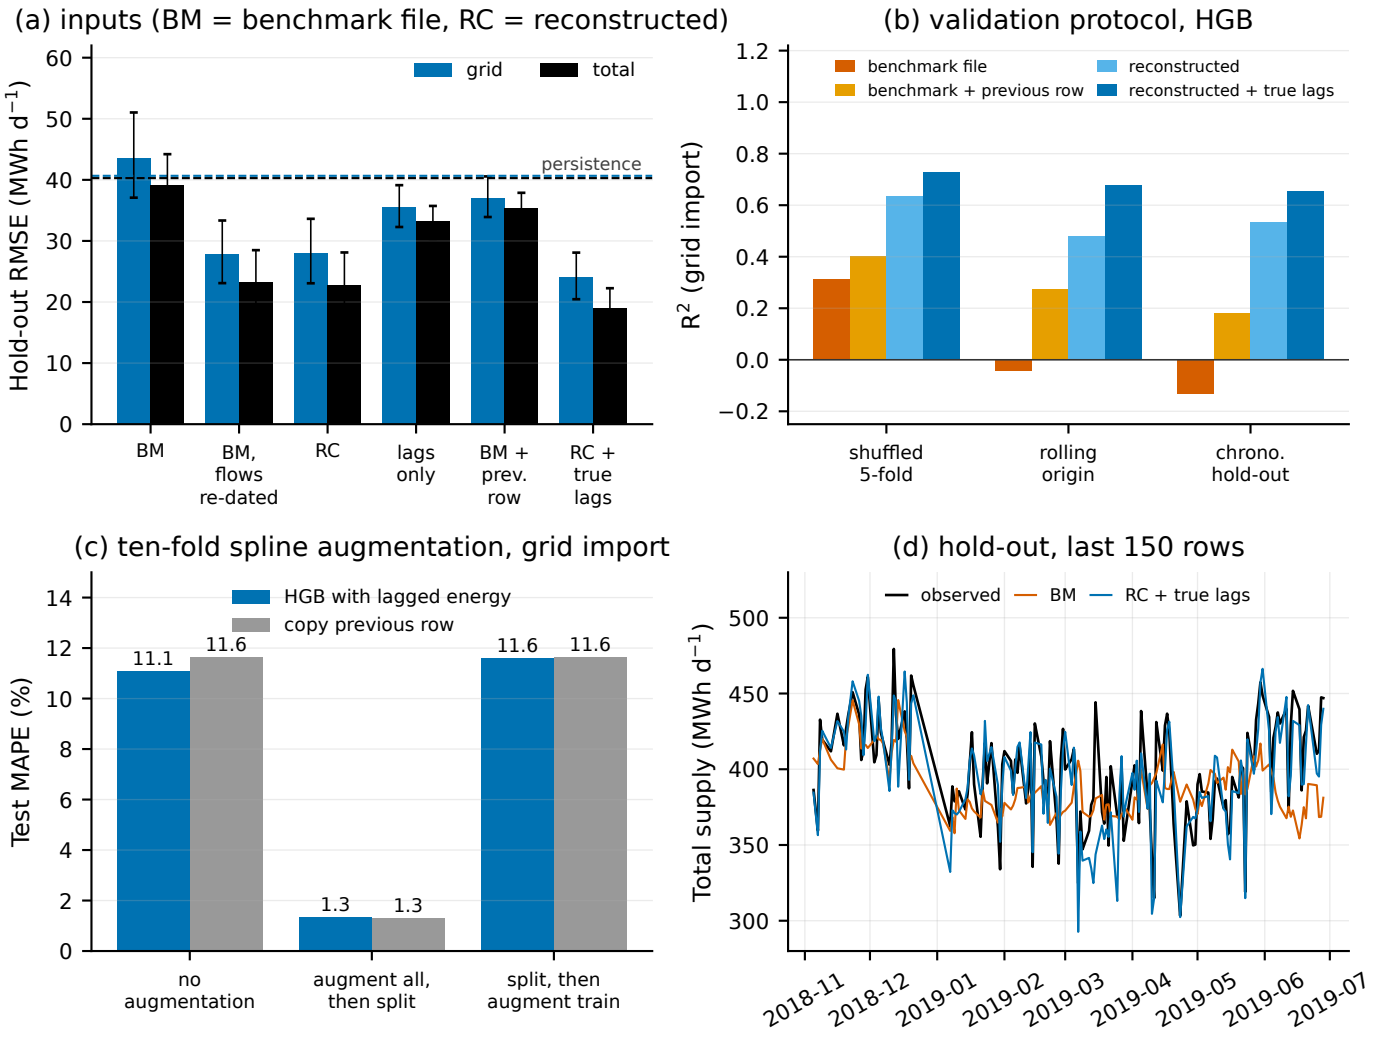
(a) inputs (BM = benchmark file, RC = reconstructed)
Hold-out RMSE (MWh d^{-1})
grid
total
persistence
BM
BM, flows re-dated
RC
lags only
BM + prev. row
RC + true lags
(b) validation protocol, HGB
R^2 (grid import)
benchmark file
benchmark + previous row
reconstructed
reconstructed + true lags
shuffled 5-fold
rolling origin
chrono. hold-out
(c) ten-fold spline augmentation, grid import
Test MAPE (%)
HGB with lagged energy
copy previous row
11.1
11.6
1.3
1.3
11.6
11.6
no augmentation
augment all, then split
split, then augment train
(d) hold-out, last 150 rows
Total supply (MWh d^{-1})
observed
BM
RC + true lags
2018-11
2018-12
2019-01
2019-02
2019-03
2019-04
2019-05
2019-06
2019-07