





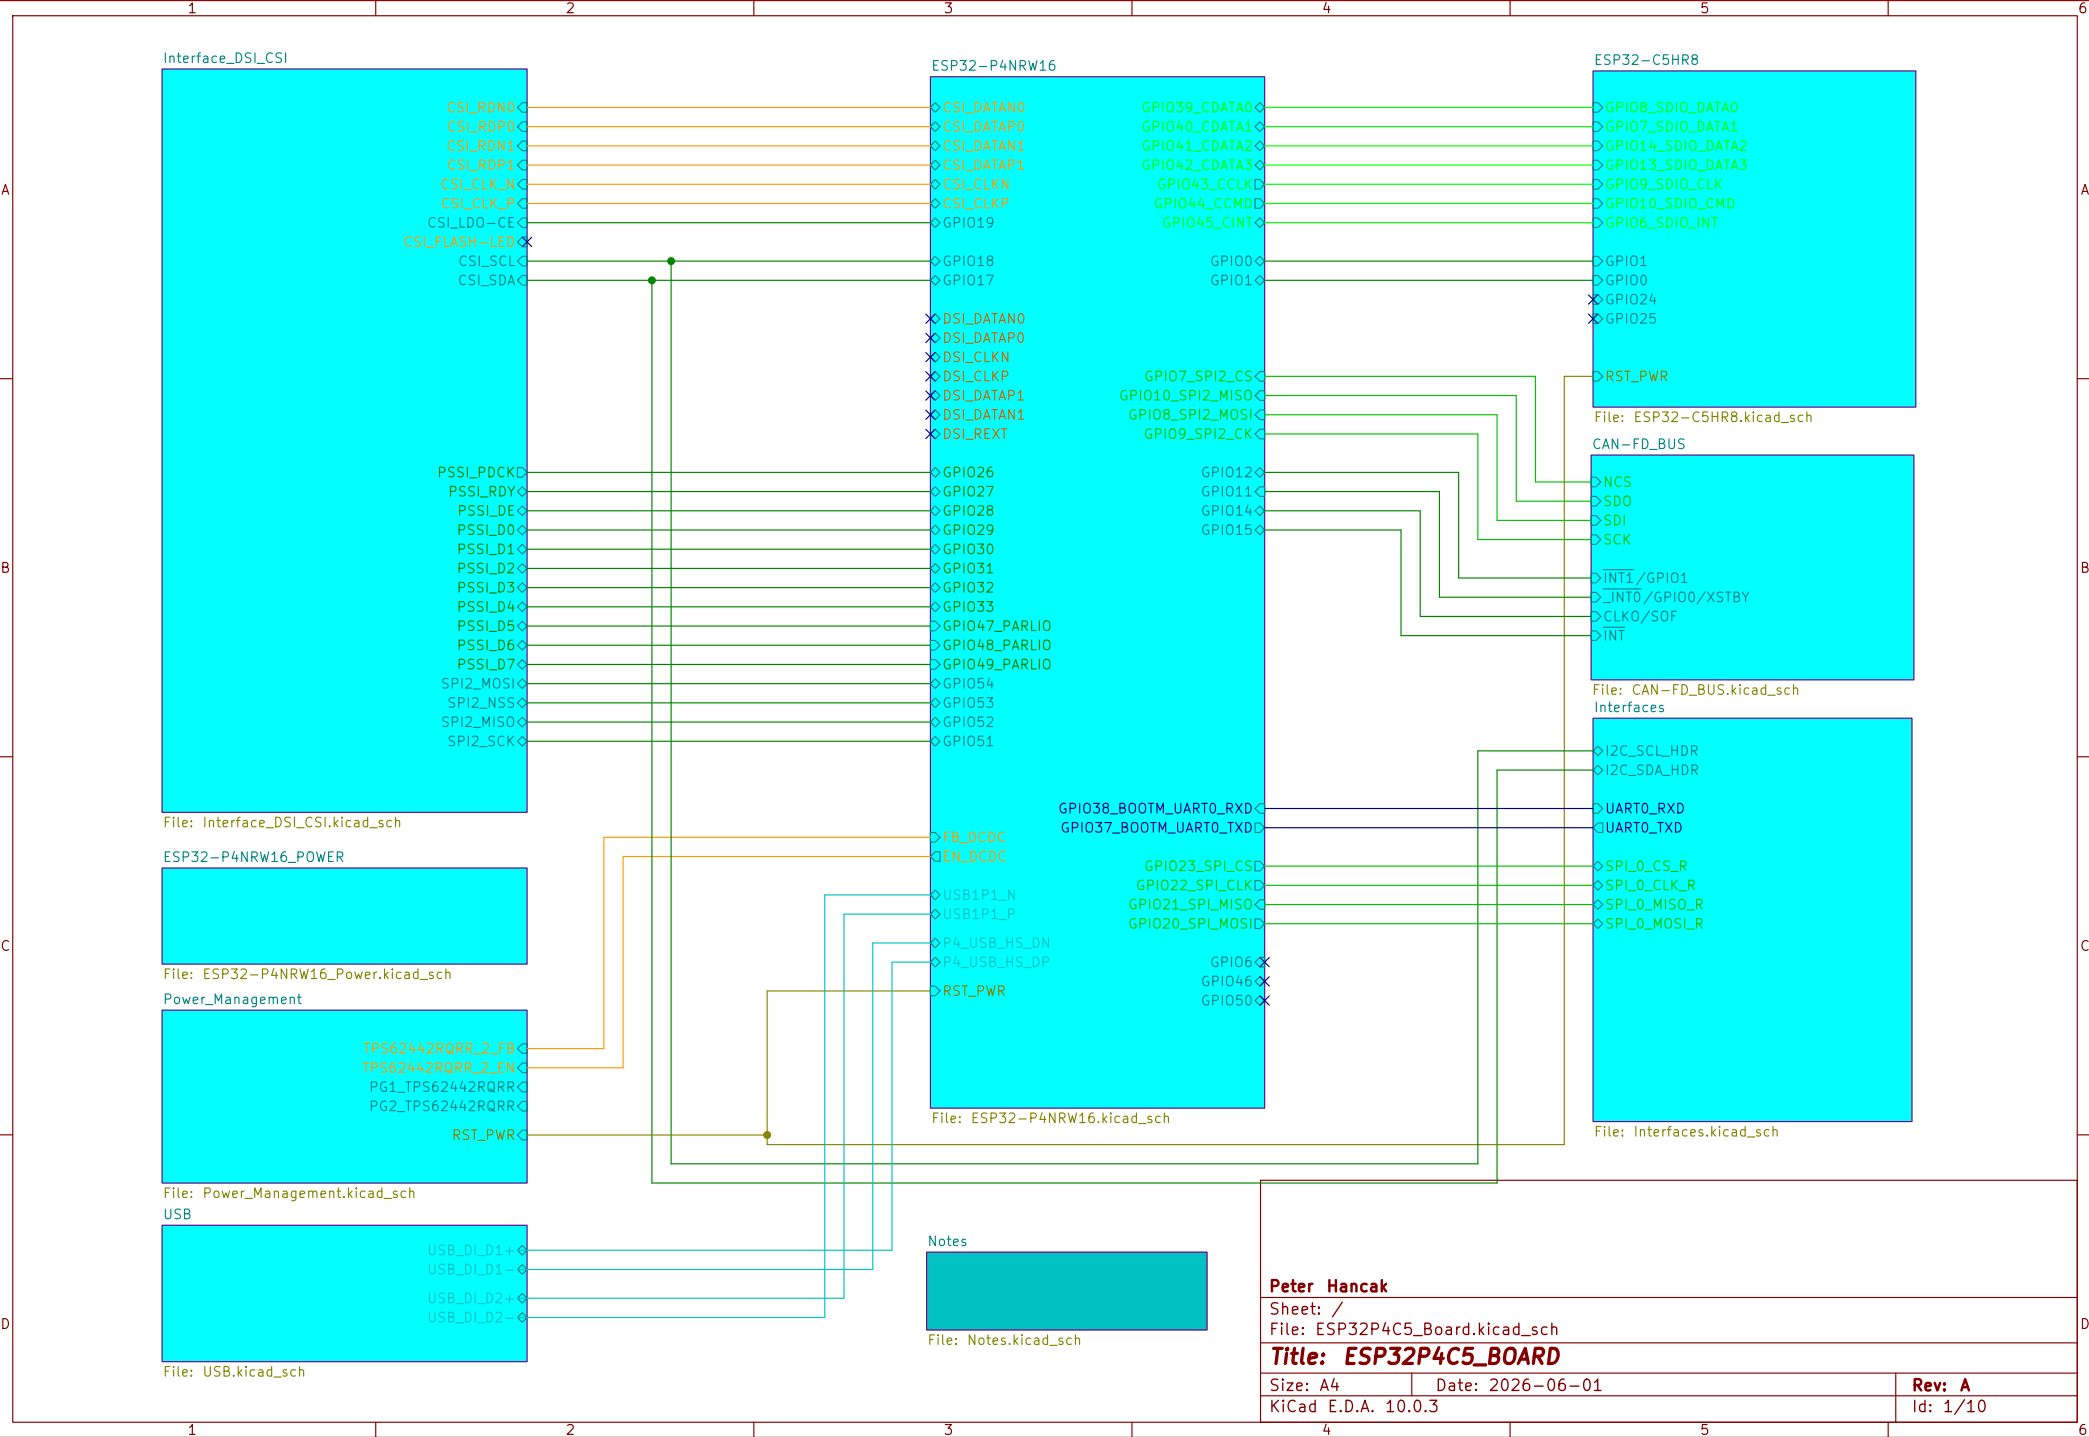

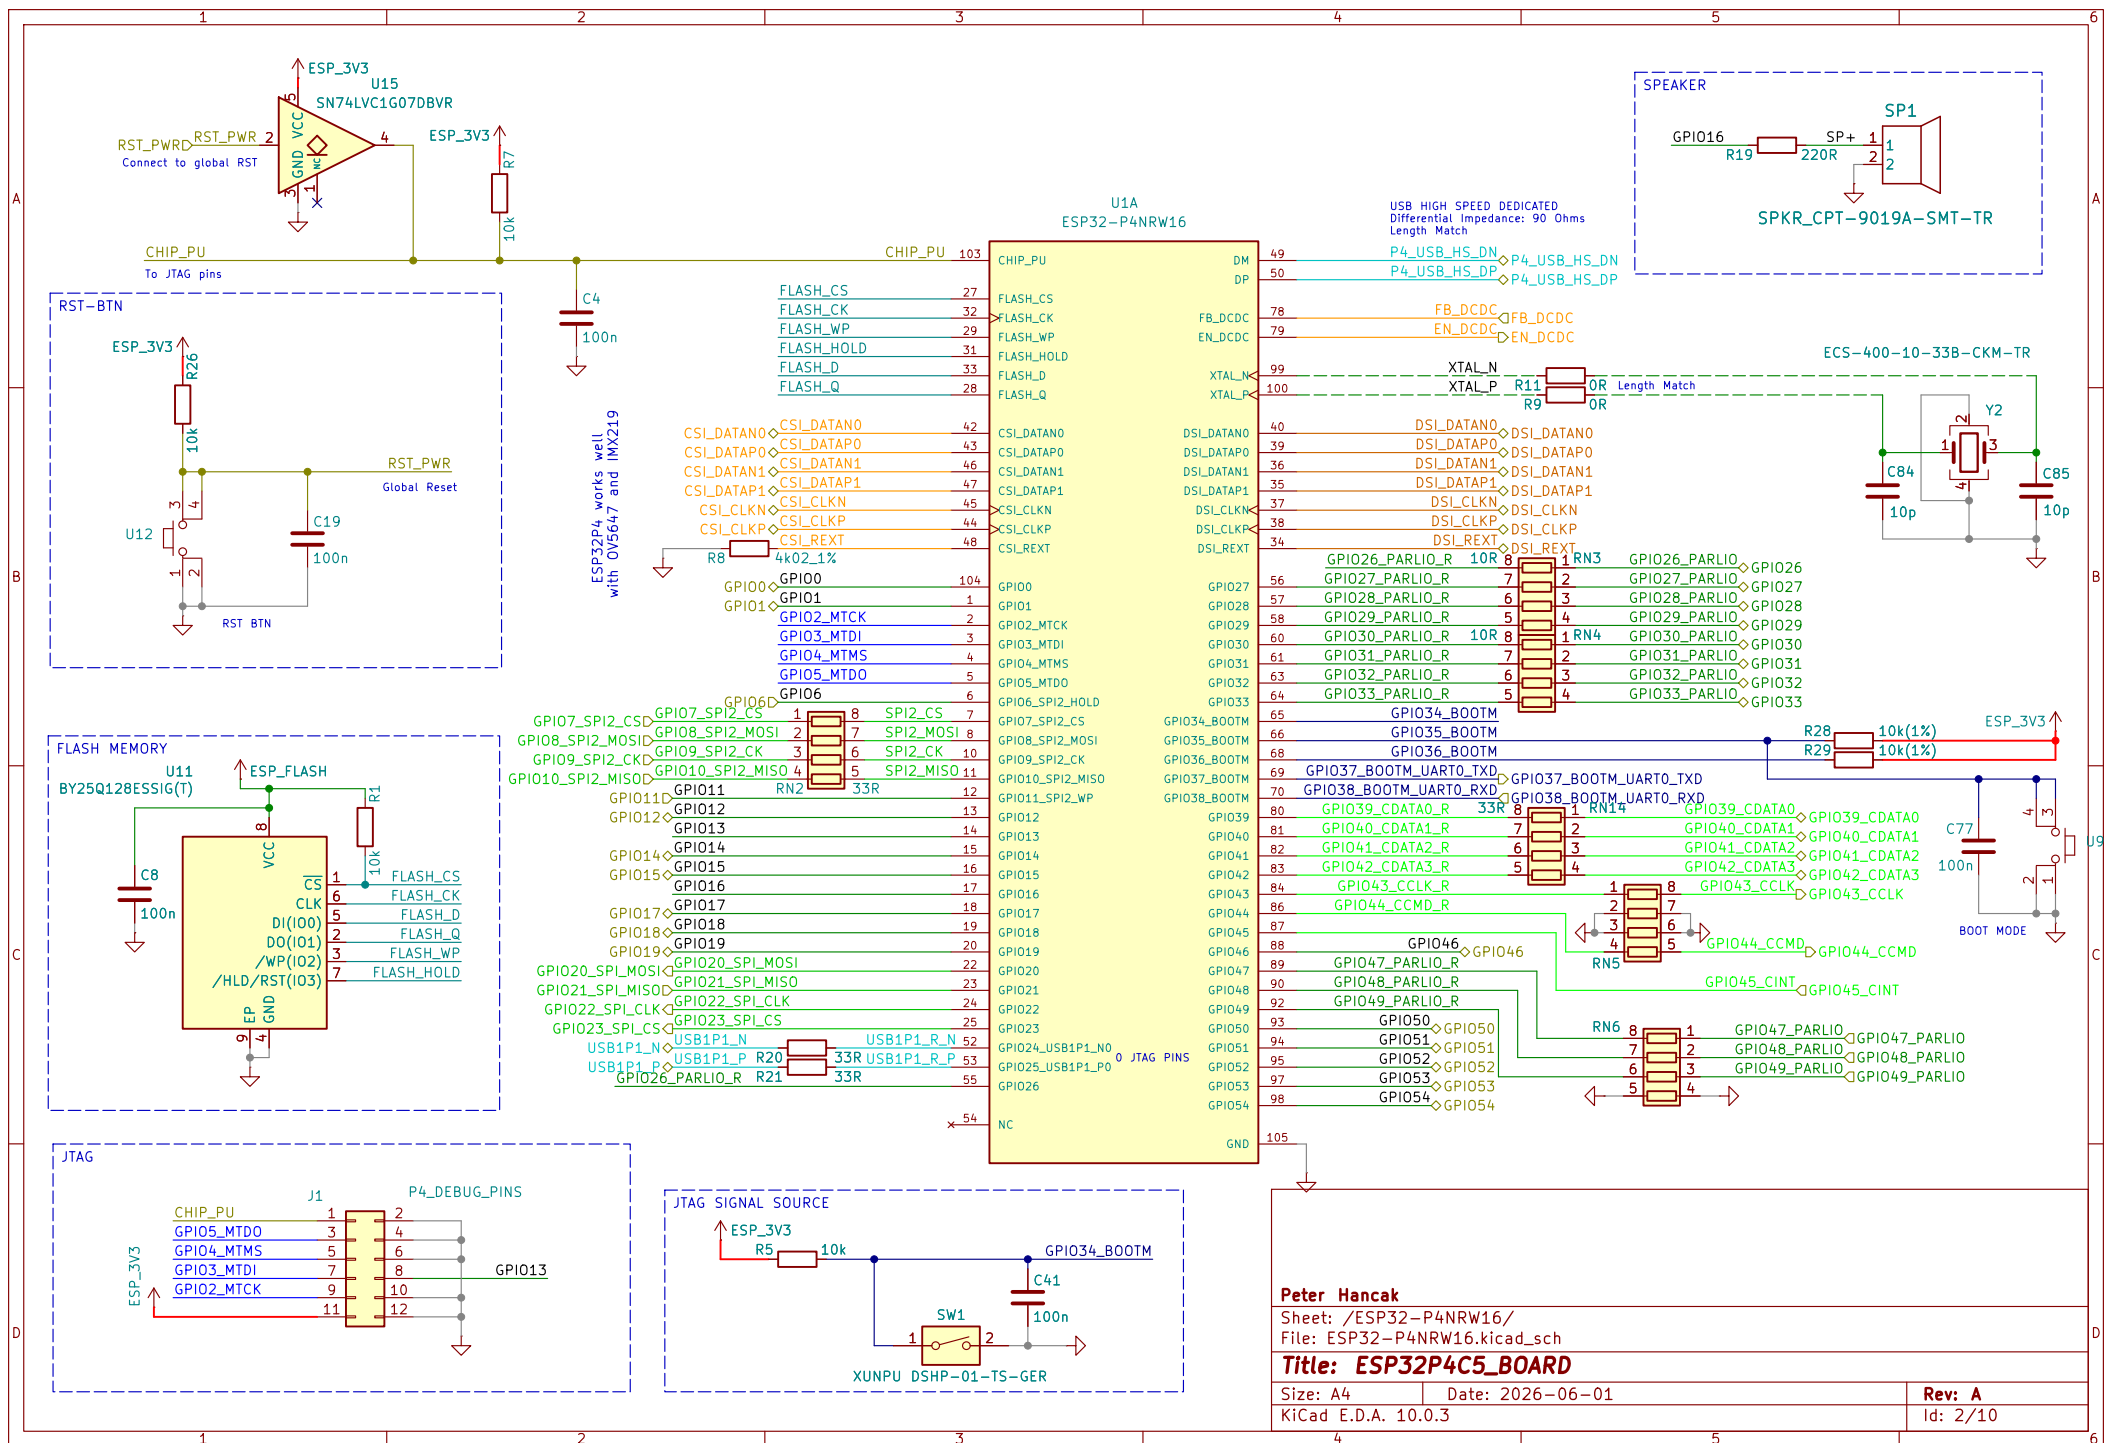

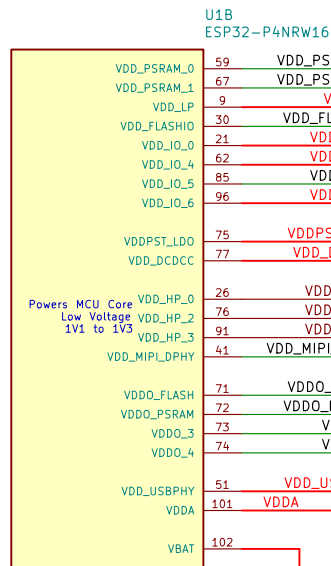

ESP_3V3 is from 5V LDO or SMPS

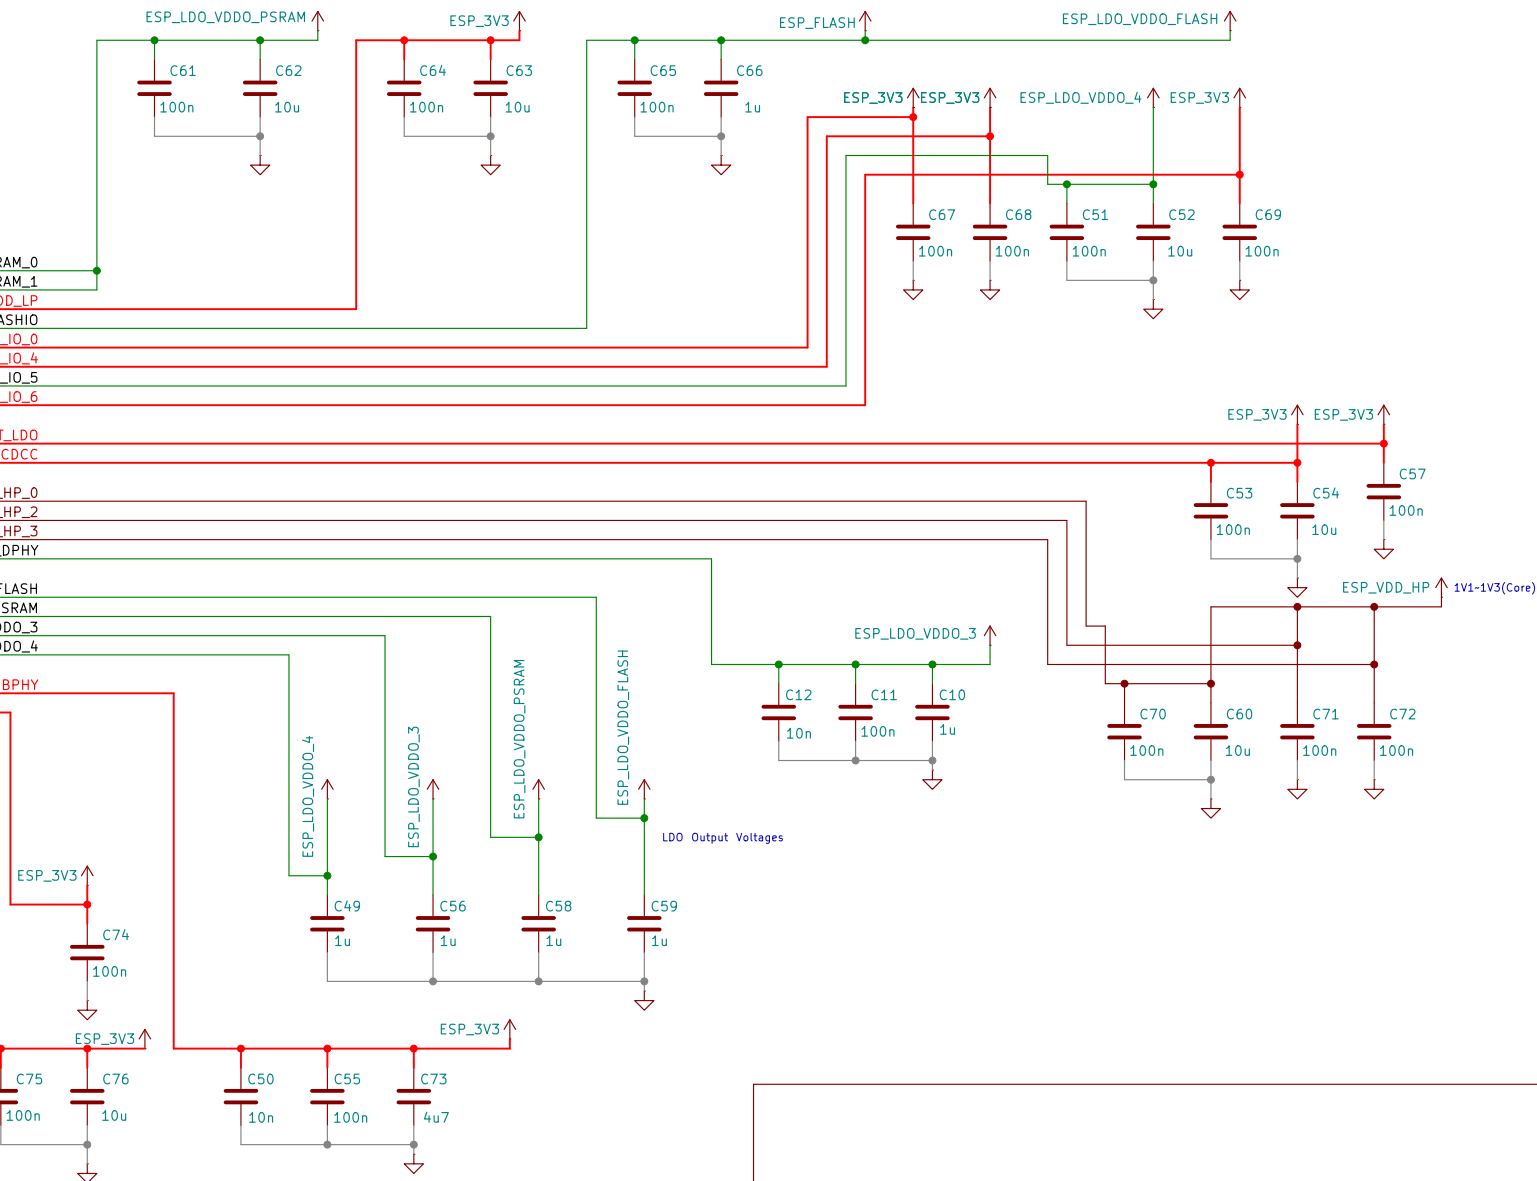



Peter Hancak

Sheet: /ESP32-P4NRW16_POWER/
File: ESP32-P4NRW16_Power.kicad_sch


Title: ESP32P4C5_BOARD

Size: A4 Date: 2026-06-01
KiCad E.D.A. 10.0.3

Rev: A
Id: 3/10

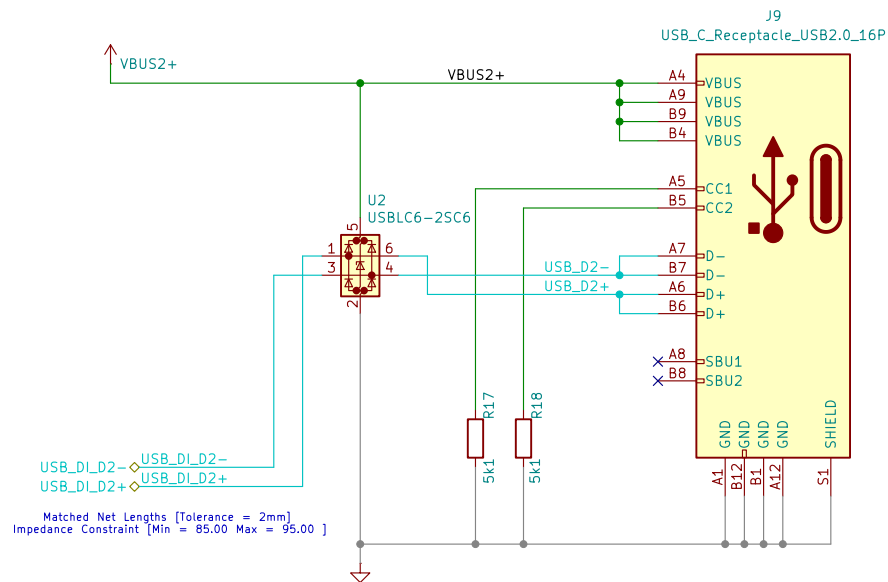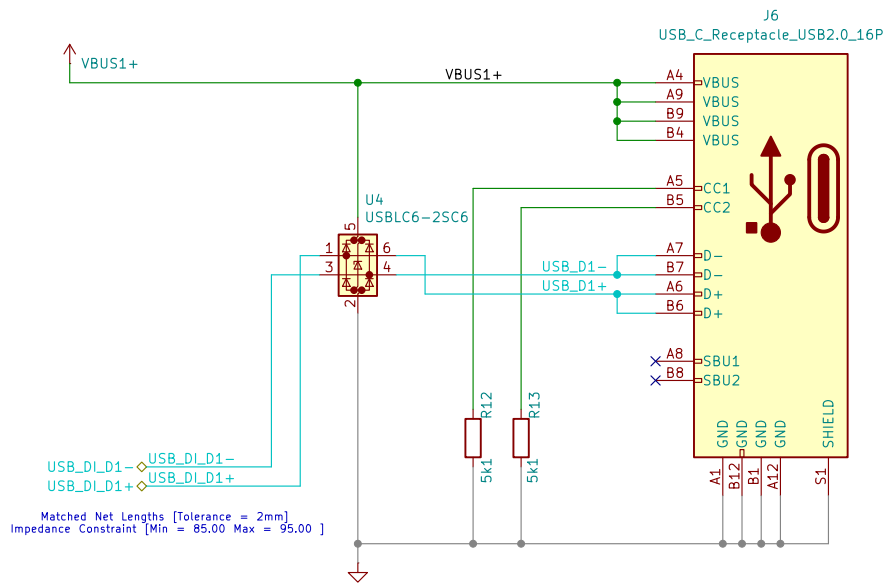

Mounting Holes



Peter Hancak

Sheet: /USB/

File: USB.kicad_sch

Title: ESP32P4C5_BOARD


Size: A4


Date: 2026-06-01



Rev: A

KiCad E.D.A. 10.0.3

Id: 4/10

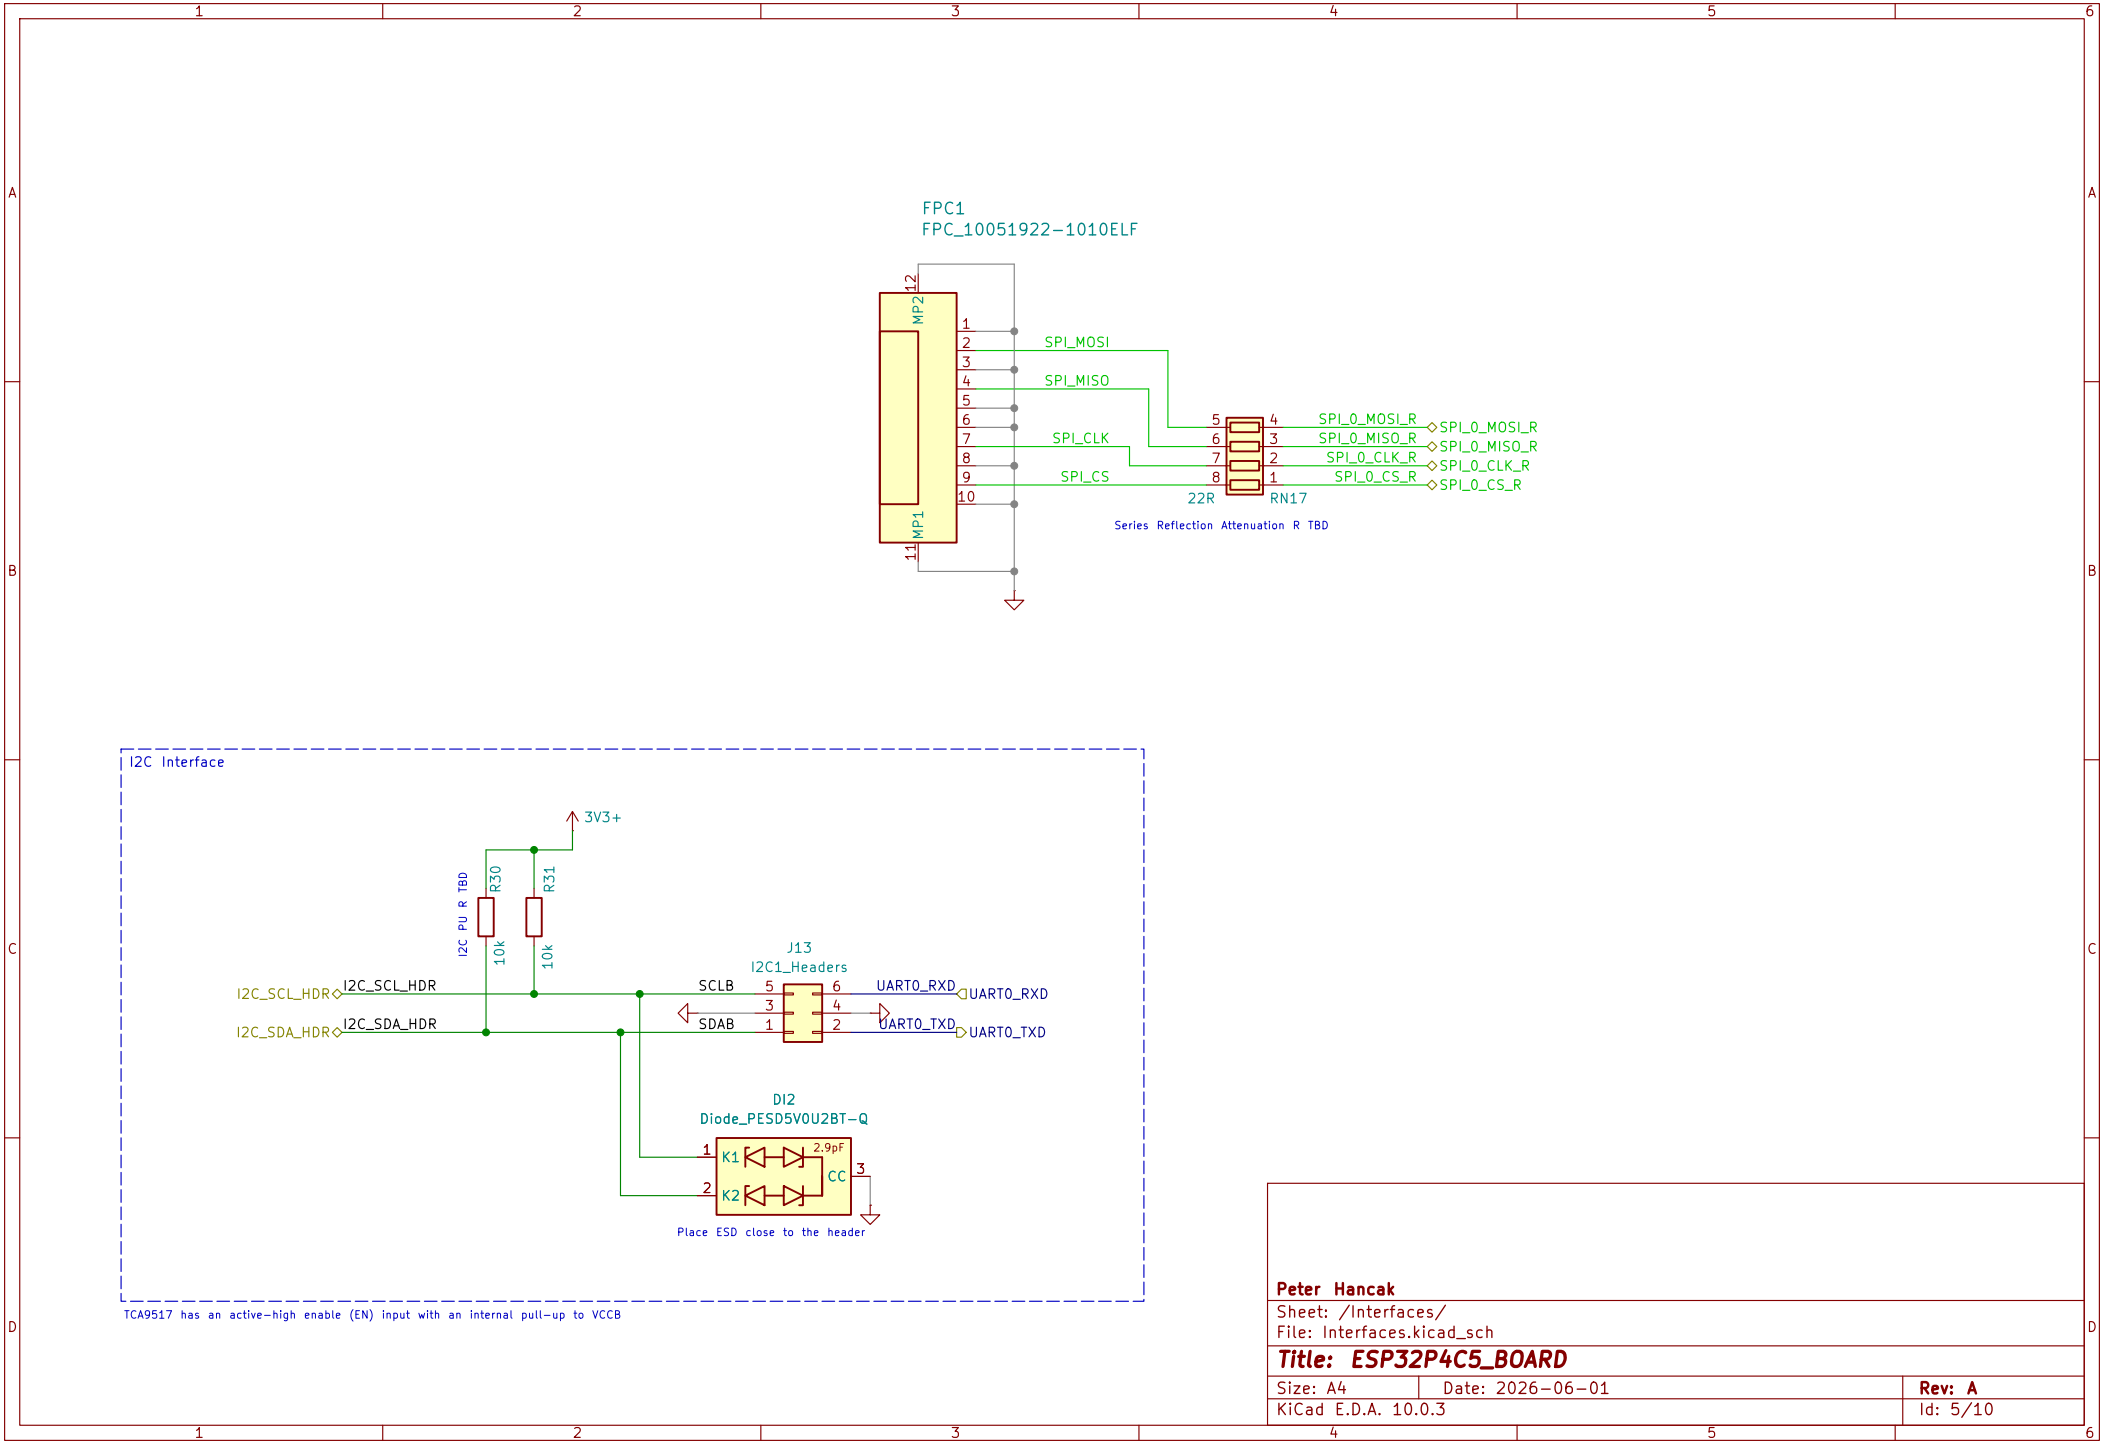

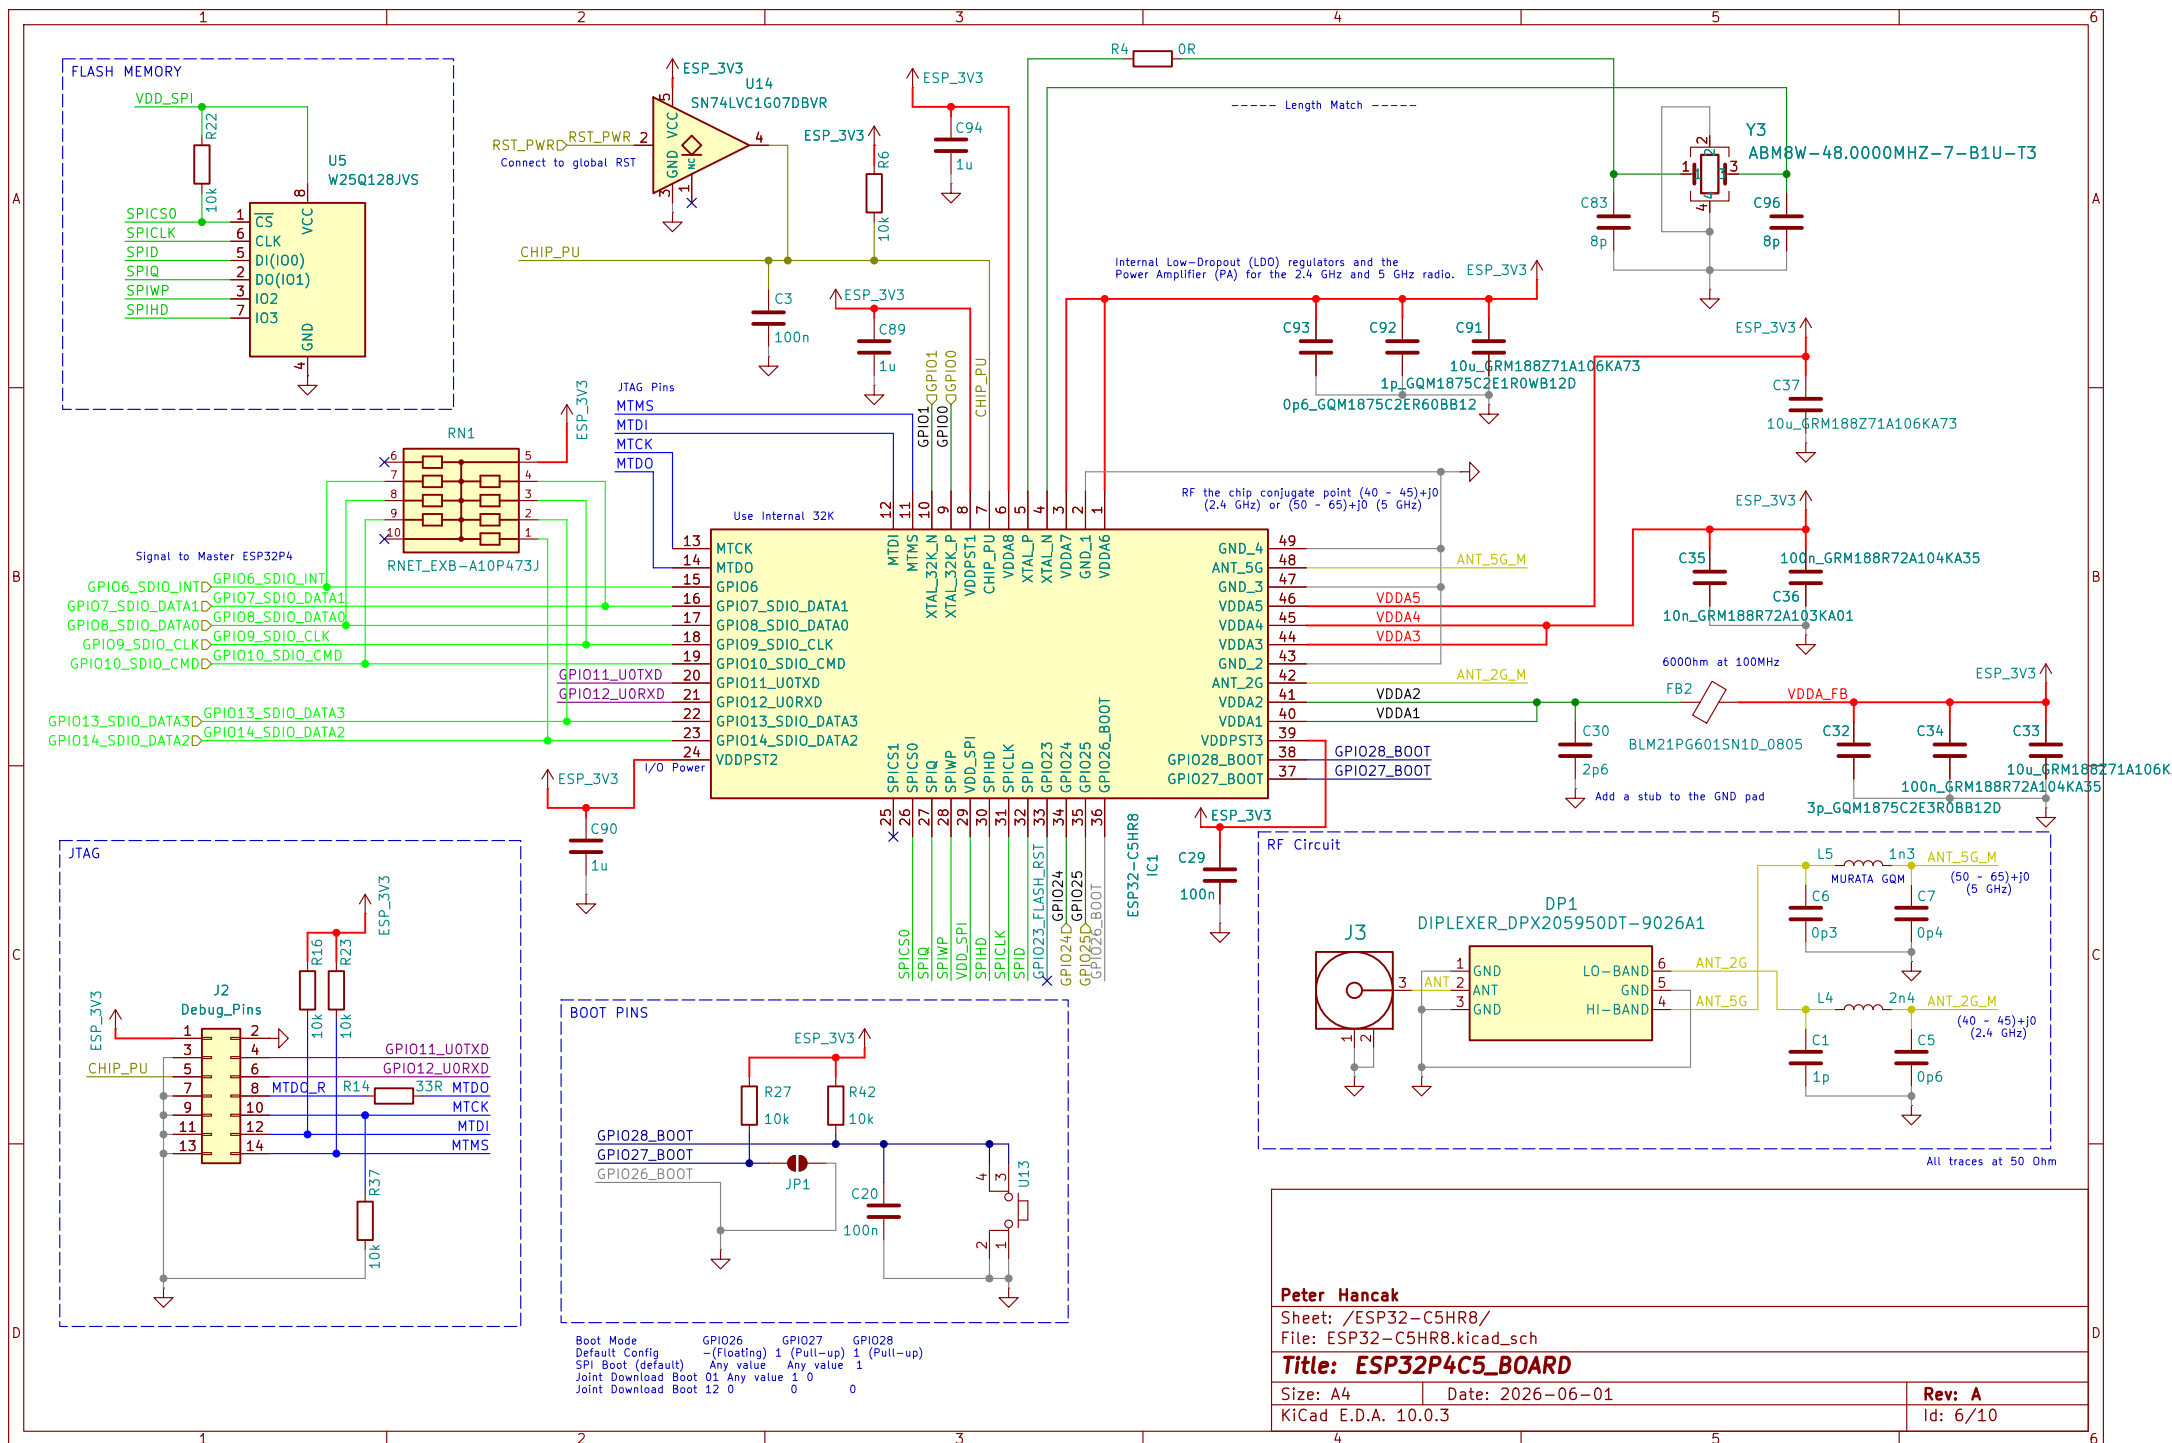

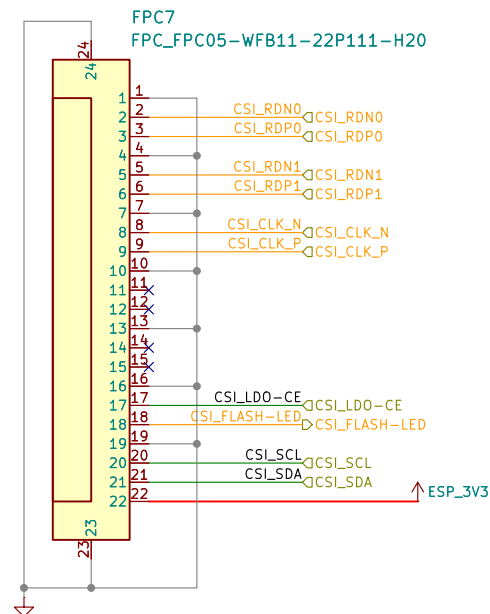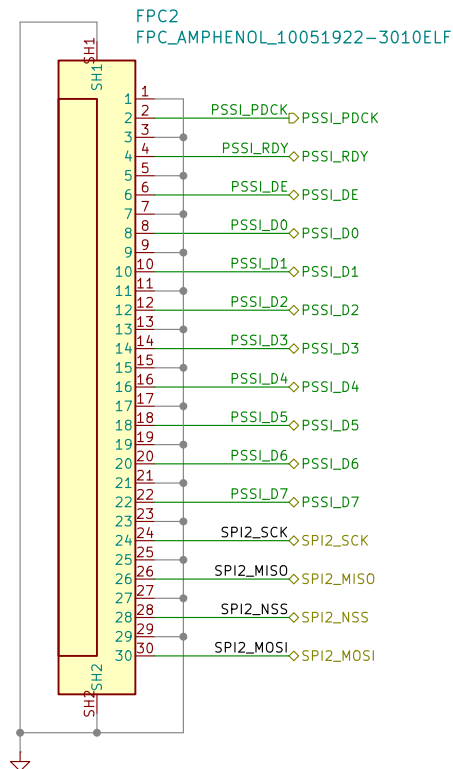

FPC REQUIREMENTS/GOALS:
- based on 54548-227
0.50mm Pitch Easy-On FFC/FPC Connector, 1.20mm Height,
Right-Angle, Surface Mount, ZIF, Bottom Contact Style, 22 Circuits,
Gold (Au)Plating0.50mm Pitch Easy-On FFC/FPC Connector,
1.20mm Height, Right-Angle Surface Mount, ZIF, Bottom Contact
Style, 22 Circuits, Gold (Au)Plating

MIPI 2 LANE 40PIN 0.5P REFERENCE
https://www.alibaba.com/product-detail/3-5-Inch-LCD-480-800-1601636999524.html?spm=a2700.proseach.normal_offer.d_image.311067af89LjnB&priceId=2b7e3e7b4ca24f6aad4eb9f0880c6bb

Peter Hancak

Sheet: /Interface_DSL_CSI/
File: Interface_DSL_CSI.kicad_sch


Title: **ESP32P4C5_BOARD**

Size: A4 Date: 2026-06-01

KiCad E.D.A. 10.0.3

Rev: A

Id: 8/10

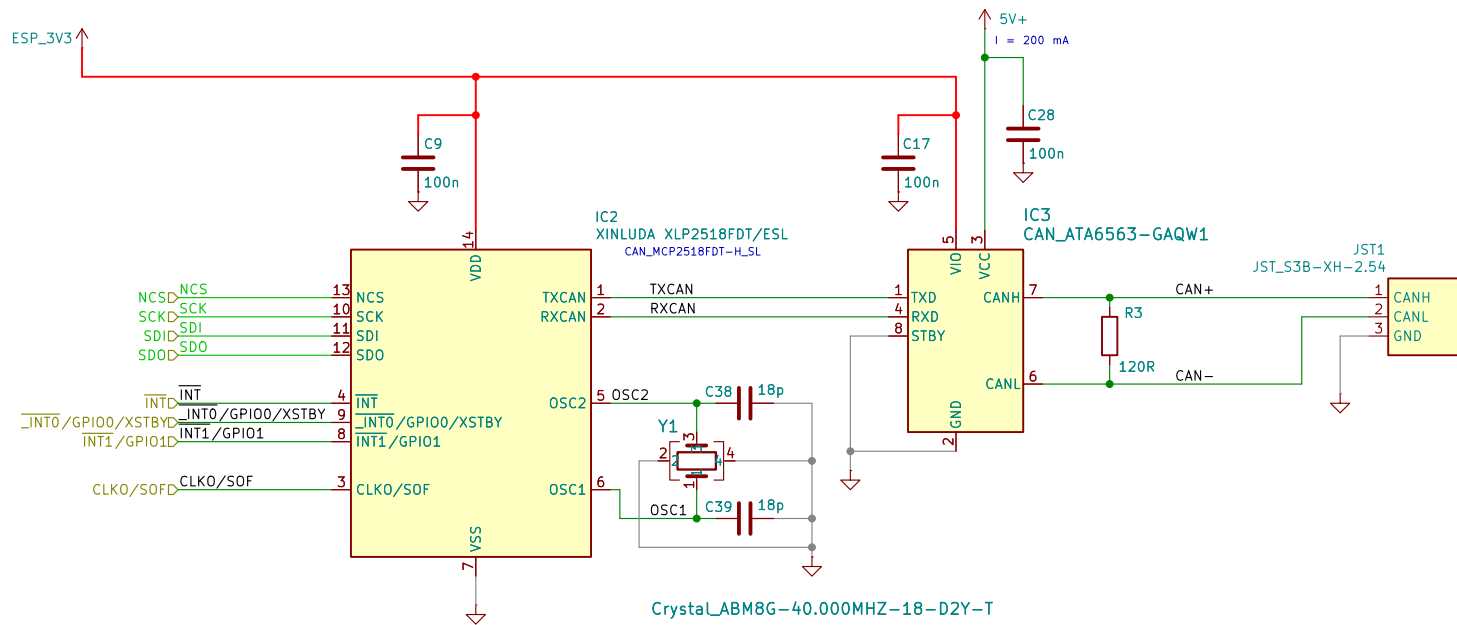

Use INT0 when your software needs to know: "Is there data for me to read and process?"
 Use SOF when your software needs to know: "Exactly what microsecond did this network event happen in physical reality?"

Peter Hancak

Sheet: /CAN-FD_BUS/
 File: CAN-FD_BUS.kicad_sch

Title: ESP32P4C5_BOARD

Size: A4 Date: 2026-06-01
 KiCad E.D.A. 10.0.3

Rev: A
 Id: 9/10

