modaLIGHT®
SPECIFICATION

The Pharos POE provides a simple power and networking solution for four Power-over-Ethernet devices with a separate Ethernet uplink port. It is perfect for connecting power and data between Pharos Controllers and Pharos Remote Devices.
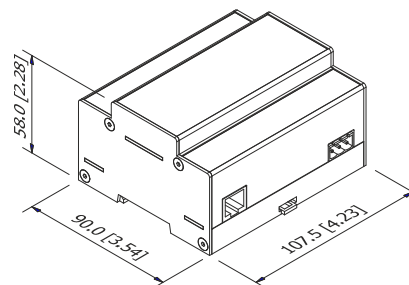

SPECIFICATION

Certifications	CE compliant, ETL/cETL listed
Power	48V DC on install-friendly 0.200" (5.08mm) 3-pin plug in rising clamp connector (included)
Consumption	Any Pharos Controller
Temperature	0°C to 50°C (32°F to 122°F)
Physical	6 unit wide DIN rail mounting enclosure (DIN43880 / EN60715 (35/7.5 rail))
Weight	0.5 kg (1.1 lbs)
Shipping	20 x 15 x 12 cm (8" x 6" x 5") 0.5 kg (1.1 lbs)
Warranty	5 years

INTERFACES

PoE	Four RJ45 sockets for 10/100Base-TX Ethernet with Power-over-Ethernet
Ethernet	RJ45 socket for 10/100Base-TX Ethernet

ORDER CODE & VARIANTS

POE	Unmanaged PoE Ethernet Switch (4+1 Port: 4 PoE, 1 non-PoE)

DIMENSIONS

58.0 [2.28]
90.0 [3.54]
107.5 [4.23]

STANDARDS & CERTIFICATIONS

CE   ETL

5 YEAR WARRANTY

Project Name:

Notes: