moda**LIGHT**®
SPECIFICATION

Create Unlimited Runs of Continuous Solid Lines of Light.

Complete lighting solution that offers a low profile and easily bends along it's line of light (opposite bend to Super Neon X Dome & Flat). Ultra flexible, bends easily, free from any form of shape memory. Create endless contours, forms, lines, curves and shapes of powerful solid light. Transparent ends allows for unlimited run lengths, combined with integral "No Tool" connectors and simple leader/jumper cables. UV protected IP67 Wet Location Rated.

OUTPUT

Delivered Lumens	182.77
CCT & SDMC	4500K - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.3710 y: 0.3900 u: 0.2139 v: 0.5059
Color Bin Tolerance	+ 3% / -3%
Efficacy (lm/w)	54.07
CRI	88
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

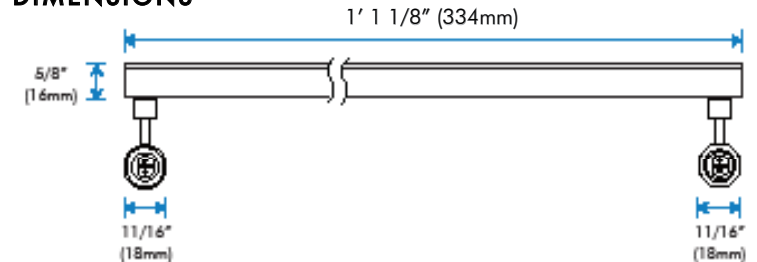|	
Input Voltage	24V DC
Power Consumption	3.38W (0.02A)
Power Factor	≤ 1
Dimming	100 - 277V 0-10V & Magnetic Low Voltage
Emergency	N/A

PHYSICAL

Applications	Accent Linear / Curved Surfaces, Architectural Highlights
Dimensions	Length 1' 1 1/8" (334mm) Width 5/8" (16mm) Height 9/16" (15mm)
Weight	4.8 oz (136g)
Construction	UV Resistant Tough White Flexible PVC
Thermal Management	Cool to Touch, Free Air Convection
Optics	N/A
Fixture Connections	Male and Female Barrel Connectors
Operating Temperature	-4°F ~ 113°F (-20°C ~ 45°C)
Storage Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Humidity	0-95% Non Condensing

DIMENSIONS

1' 1 1/8" (334mm)
5/8" (16mm)
11/16" (18mm)
11/16" (18mm)

CIE 1931 CHROMATICITY DIAGRAM

0.3710, 0.3900

LUMINANCE DATA
(cd/sq.m)

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	4853	3617	3598
55	4571	3477	3520
65	4156	3382	3475
75	3738	3375	3516
85	3308	3525	3634

CONNECTOR DIMENSIONS

Bottom Feed

5/8" (16mm)
7/16" (11mm)
1 3/8" (45mm)

STANDARDS & CERTIFICATIONS

LM 79
LM 80
3 YEAR WARRANTY

Project Name:

Notes:

ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width	
2.0 ft	16.92 fc	5.9 ft	5.5 ft
4.0 ft	4.23 fc	11.7 ft	11.0 ft
6.0 ft	2.11 fc	17.6 ft	16.6 ft
8.0 ft	1.05 fc	23.4 ft	22.1 ft
10.0 ft	0.52 fc	29.3 ft	27.6 ft
12.0 ft	0.42 fc	35.1 ft	33.1 ft

Vert. Spread: 111.3°
Horiz. Spread: 108.1°
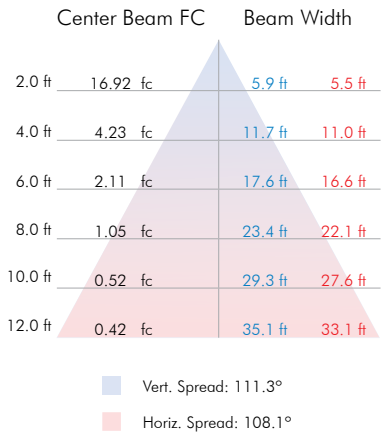
POLAR CANDELA DISTRIBUTION

- 22.50° H
- 45° H
- 67.50° H
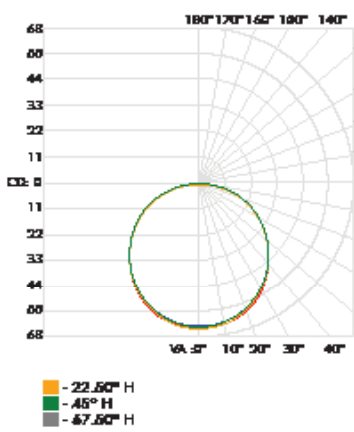
ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	26.86	N.A.	14.70%
0-40	44.77	N.A.	24.50%
0-60	85.53	N.A.	46.80%
60-90	37.28	N.A.	20.40%
0-90	137.99	N.A.	75.50%
90-180	44.77	N.A.	24.50%
0-180	182.77	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Lamp	% Fixt
0-10	3.23	N.A.	1.77%
10-20	9.30	N.A.	5.09%
20-30	14.32	N.A.	7.84%
30-40	17.94	N.A.	9.82%
40-50	20.10	N.A.	11.00%
50-60	20.65	N.A.	11.30%
60-70	19.70	N.A.	10.78%
70-80	17.63	N.A.	9.65%
80-90	15.00	N.A.	8.21%
90-100	12.44	N.A.	6.81%

WIRING

UL / cUL Non-Dimming

UL / cUL 0-10V Dimming
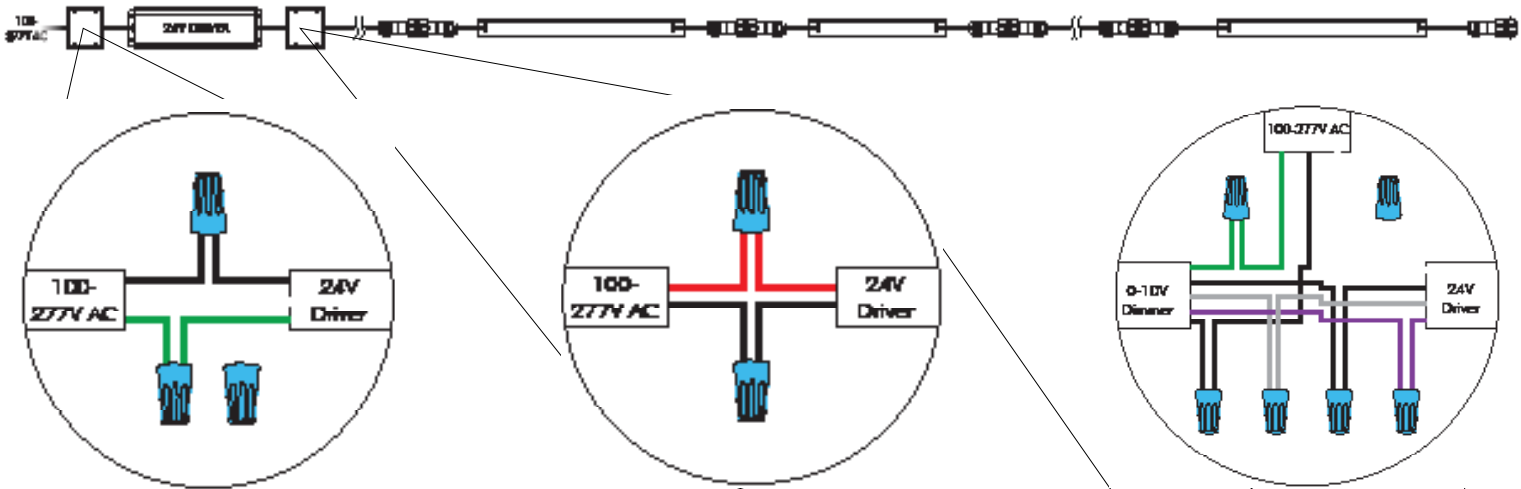
WIRING LEGEND

Power (100-277V AC)
- Power Positive
- Power Negative
- Ground

24V Driver
- Power Positive
- Power Negative

0-10V Dimmer
- Power In
- Power Out
- Ground
- Data Positive
- Data Negative

MAX CONTINUOUS RUN

150W Driver   30ft

ACCESSORIES

SN-LDR-CBL-5FT 5' Leader Cable	SN-LDR-CBL-10FT 10' Leader Cable	SN-LDR-CBL-20FT 20' Leader Cable	SN-JMP-CBL-1FT 1' Jumper Cable
Connects SUPER NEON to Power Supply	Connects SUPER NEON to Power Supply	Connects SUPER NEON to Power Supply	Connects Two SUPER NEON Together

SN-LDR-CBL-5FT
5' Leader Cable
Connects SUPER NEON to Power Supply

Cable Dimmension
5' (3m)

Connector Dimmension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-LDR-CBL-10FT
10' Leader Cable
Connects SUPER NEON to Power Supply

Cable Dimmension
10' (3m)

Connector Dimmension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-LDR-CBL-20FT
20' Leader Cable
Connects SUPER NEON to Power Supply

Cable Dimmension
20' (3m)

Connector Dimmension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-JMP-CBL-1FT
1' Jumper Cable
Connects Two SUPER NEON Together

Connector Dimmension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-T
Terminator
Terminates SUPER NEON Fixture

L: 1" (25mm)
W: 11/16" (18mm)
H: 1/4" (7mm)

SNE-CLP-S2
Aluminum Mounting Clip
Aluminum Mounting Clip for SUPER NEON EDGE

L: 1 3/8" (35mm)
W: 5/8" (17mm)
H: 15/16" (24mm)

SNE-XTR-1F
1' Aluminum Xtrusion®
1' Aluminum Xtrusion for SUPER NEON EDGE

L: 1' (305mm)
W: 5/8" (17mm)
H: 15/16" (24mm)

SNE-XTR-4F
4' Aluminum Xtrusion®
4' Aluminum Xtrusion for SUPER NEON EDGE

L: 4' (1.22m)
W: 5/8" (17mm)
H: 15/16" (24mm))

24V 0-10V Dimming Driver

MP89
100 - 277V

150W - IP66

L: 9 1/2" (241mm)
W: 2 5/8" (67mm)
H: 1 5/8" (40.5mm)

24V Non-Dimming Driver

MP17
100 - 277V AC

150W - IP67

L: 8 11/16" (222mm)
W: 2 11/16" (68mm)
H: 1 1/2" (39mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	3
Environment	Wet Location - IP67
Warranty	3 Year Limited Warranty

ORDERING

Bottom Feed	**SNE-BF-4500K-1FT**