

Super High Output Linear Flex.

X-FLEX HCRI uses the latest Samsung SMD LED Package that delivers an incredible amount of illumination while remaining cost efficient. With its low profile, cutting distances of every 1/2" and a high copper content FPCB for stable thermal management, X-FLEX HCRI is a high performance LED package. This product must be used with an extrusion to achieve L70. See MODA Metal[®] for extrusion options.

OUTPUT


Delivered Lumens	478.33 lm / ft
CCT & SDMC	3000K - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.4322 y: 0.4051 u: 0.2470 v: 0.5210
Color Bin Tolerance	+ 3% / -3%
Efficacy (lm/W)	62.93
CRI	92
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	12V DC
Power Consumption	7.6W per ft (0.06A)*
Power Factor	≤ 1
Control	100-277V 0-10V & Magnetic Low Voltage

*Varies based on run and driver

CIE 1931 CHROMATICITY DIAGRAM



R VALUES

R1	R2	R3	R4	R5
92	92	88	92	91
R6	R7	R8	R9	R10
92	91	90	90	88
R11	R12	R13	R14	R15
92	81	92	91	91

Project Name:


Notes:



PHYSICAL

Applications	Cabinet, Cove, Display, Niches, Perimeter Lighting
Dimensions	Length 16' 4 13/16" (5m) Width 7/16" (10mm) Height 1/8" (2mm)
LED Spacing	1/8" (3.5mm)
Cutting Distance	1/2" (15mm)
Weight	6.4oz (181.4g) Per Reel
Construction	Constant Voltage Design Protects LEDs And Prolongs Life. White FPCB Inside a Silicone Sleeve
Thermal Management	N/A
Optics	N/A
Fixture Connections	Solder joints
Operating Temperature	-22°F ~ 122°F (-30°C ~ 70°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

DIMENSIONS

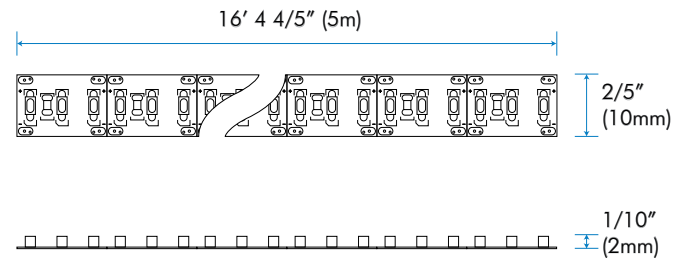

MODA TECHNOLOGY

moda**HIGH CRI**

moda**PHOSPHOR**[™]

STANDARDS & CERTIFICATIONS



RoHS[✓]

LM
79

LM
80


5
YEAR
WARRANTY

ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	44.30 fc	6.4 ft 6.7 ft
4.0 ft	11.00 fc	12.7 ft 13.3 ft
6.0 ft	5.50 fc	19.1 ft 20.0 ft
8.0 ft	2.80 fc	25.4 ft 26.6 ft
10.0 ft	1.40 fc	31.8 ft 33.3 ft
12.0 ft	1.10 fc	38.2 ft 40.0 ft

■ Vert. Spread: 115.7°
■ Horiz. Spread: 118.0°

POLAR CANDELA DISTRIBUTION

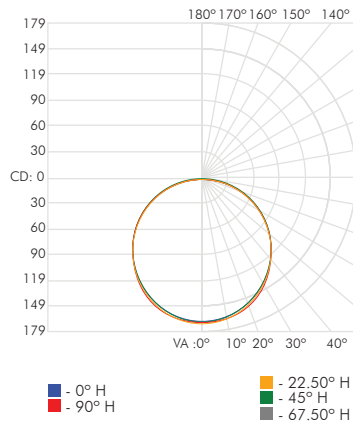

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	125.32	N.A.	26.20%
0-40	206.16	N.A.	43.10%
0-60	368.79	N.A.	77.10%
60-90	104.75	N.A.	21.90%
0-90	473.54	N.A.	99.00%
90-180	4.78	N.A.	1.00%
0-180	478.33	N.A.	100.00%

LUMENS PER ZONE


Zone	Lumens	% Lamp	% Fixt
0-10	15.30	N.A.	3.20%
10-20	43.50	N.A.	9.1%
20-30	66.40	N.A.	13.90%
30-40	80.80	N.A.	16.90%
40-50	85.10	N.A.	17.80%
50-60	77.40	N.A.	16.20%
60-70	59.70	N.A.	12.50%
70-80	35.00	N.A.	7.30%
80-90	10.00	N.A.	2.10%
90-100	0.00	N.A.	0.00%

WIRING

UL / cUL Non-dimming

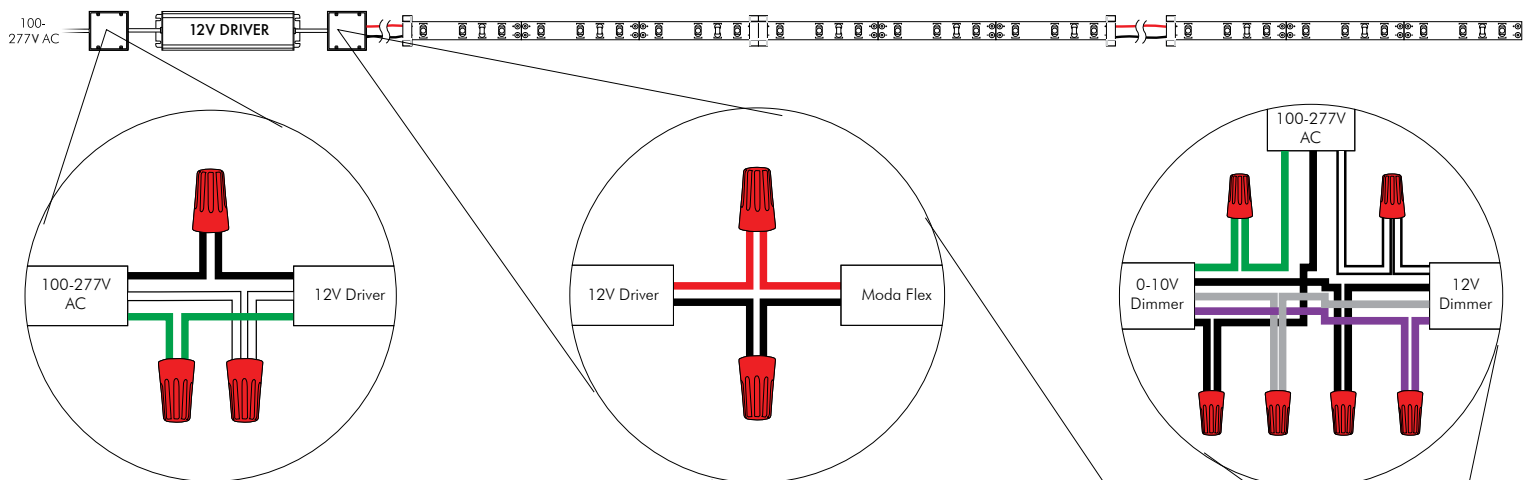

UL / cUL ELV Dimming



WIRING LEGEND

Power (100-277V AC)	UL/cUL	12V Driver
— Power Positive	— Power Positive	— Power Positive
— Power Negative	— Power Negative	— Power Negative
— Ground		— Ground
		— Data Positive
		— Data Negative

MAX CONTINUOUS RUN

60W Driver	7ft
100W Driver	12ft
132W Driver	16ft
150W Driver	18ft

12V 0-10V Dimming Drivers



MP05
347V AC

60W - IP66

L: 9 2/5" (240mm)
W: 1 7/10" (43mm)
H: 1 3/10" (32mm)



MP18N
100 - 277V AC

60W - IP66

L: 9 2/5" (240mm)
W: 1 7/10" (43mm)
H: 1 3/10" (32mm)



MP86
100 - 277V AC

100W - IP66

L: 9 1/2" (241mm)
W: 2 3/10" (58mm)
H: 1 1/2" (37mm)



MP88
100 - 277V

150W - IP66

L: 9 1/2" (241mm)
W: 2 3/5" (67mm)
H: 1 3/5" (40.5mm)

12V Non Dimming Drivers



MP16
100 - 277V AC

132W - IP67

L: 8 7/10" (222mm)
W: 2 7/10" (68mm)
H: 1 1/2" (39mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	3
Environment	Dry Location - IP20
Warranty	5 Year Limited Warranty

ORDERING

XFX-INT-S-S1-W-3H-16