moda LIGHT®
SPECIFICATION
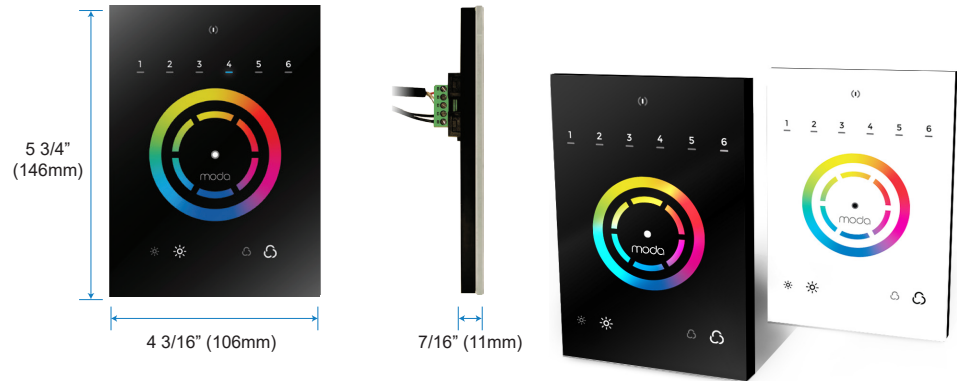
Project Name: _____   SKU: _____

MODA Contact: _____   E-Mail: _____

Type: _____   PO#: _____ Quantity: _____

Notes: _____

MODA Touch® is a wall-mounted DMX 512 controller for architectural lighting applications. The glass faceplate features 6 touch-sensitive scene buttons allowing simple control of up to 36 dynamic or static scenes for one zone. Use the touch-sensitive color wheel to select specific colors. This controller is programmable via a computer or mobile app. MODA Touch® is an economical solution for hospitality, commercial, residential, and civic projects.

5 3/4" (146mm)

4 3/16" (106mm)

7/16" (11mm)

SPECIFICATIONS

Dimensions	W: 4 3/16in (106mm) H: 5 3/4in (146mm) D: 7/16in (11mm)
Weight	7.05 oz (200g)
Mobile Apps	DMX Lightpad 3 ARCOLIS on iPhone / iPad / Android
Temperature	14°F ~ 113°F (-10°C ~ 45°C)
Software	ESA2 for Windows and Mac ESA Pro 2 for Windows and Mac
Components	Interface, Wall Plate, USB Cable, Power Supply

ACCESSORIES

RJ2BLOCK	RJ45 to connector block converter for POWER+DMX socket
POWER4M	5-10v ACDC power supply

OPTIONS

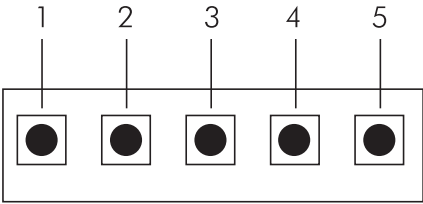|	
SKU	MTCH-S1-B MTCH-S1-W
COLOR	Black glass faceplate with black fram White glass faceplate with black frame

TECHNICAL DATA

|	
Input Power	5-15V DC 0.6A
Output Protocol	DMX512 (x2)
Programmability	PC/MAC WiFi via ARCOLIS
Connections	WiFi, USB, 8 dry contact ports, open drain output - (for relay)
Memory	Built-in flash
Battery	LIR1220
Mounting	Single/Double-gang wall socket
User-Interface	12 touch-sensitive buttons. No mechanical parts
Ports 1 - 8	8 Contact Closure Inputs Connects to Ground for Operating
Ethernet	Advanced Networking Features

STANDARDS & CERTIFICATIONS

c(ETL)us   CE   RoHS✓   EMC STANDARD   2 YEAR WARRANTY

moda**LIGHT**®
SPECIFICATION

POWER + DMX WITH THE CONNECTOR BLOCK

1	DMX1 +
2	DMX1 -
3	DMX GROUND
4	POWER GROUND
5	POWER DC+

POWER + DMX WITH RJ45 CABLE

1 ... 8

1	DMX1 +
2	DMX1 -
3	DMX2 +
4 & 5	POWER DC +
6	DMX2 -
7 & 8	POWER GROUND