


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO #: _____ Quantity: _____

Notes: _____

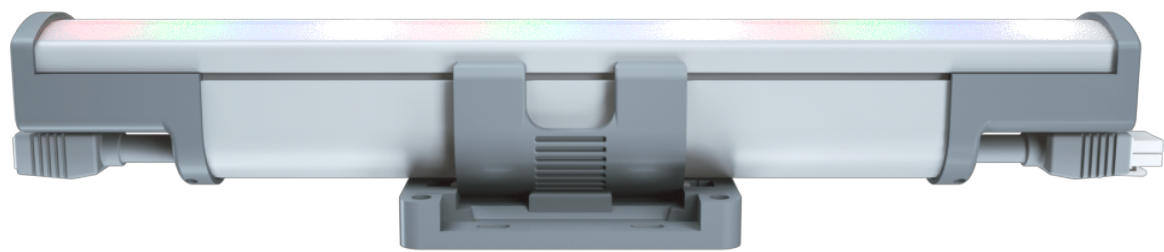

Specification Grade Premium Interior Graze Fixture.

MODA GRAZE Interior is a new patent pending cove lighting system designed for interior applications. Utilizing MODA’s latest DMX software, our onboard Microprocessor is uniquely programmed in-house with a firmware to receive DMX 512 signals for full independent control of every 1ft section. Mix colors to create amazing displays and color scenes using MODA controls. Switch to a high CRI, high R1-R15 white light for quality general illumination. 100-277V, 50/60Hz power input allows these fixtures to be installed anywhere in the world. New patent pending locking bracket rotates 180 degrees for a multitude of light directions. Rugged aluminum design. Fast installation is achieved with MODA KWIK CONNECT plugs and install-integral thumb latch connectors. Available in 1ft & 4ft sections. Series is designed for driver or light engine to be factory replaced at its end of life or recycled.

Designed and developed in Las Vegas, USA by MODA.

PAGE

3	FEATURES
4	1 FOOT
5	4 FOOT
6	OPTIC FLEXIBILITY
7	OPTIC FLEXIBILITY CONTINUED
8	DMX WIRING
9	ACCESSORIES: CABLES
10	FIXTURES & ACCESSORIES

PHYSICAL

Dimensions	L: 1ft (306mm)	W: 2 1/2in(72mm)
	L: 4ft (1.21m)	H: 2 5/16in(60mm)
Applications	Cove, Accent & Indirect General Illumination	
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Lens	
Ingress Protection	Dry/Damp Location IP44	
Thermal Management	MODA Aluminum Heat Sink	
Beam Angle	120°	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)	
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)	
Humidity	0-95% Non Condensing	

OUTPUT

CCT & SDCM	RGB - N/A
	27K, 3K, 35K, & 4K - 2 Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
CRI	97 (27K, 3K, 35K, & 4K)
Lumen Maintenance	90,000 Hours L70 @ 25°C
	70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	DMX 512
Power Factor	≥ 0.96

MODA TECHNOLOGY

moda**SOFTWARE**[™]

moda**HARDWARE**[™]

moda**DMX**[™]

moda**DRIVER**[™]

moda**PHOSPHOR**[™]

moda**ZERO BIN**[™]

moda**OPTIC**[™]

moda**LINEAR OPTIC**[™]

moda**THERMAL MANAGEMENT**[™]

moda**AIRFLOW**[™]

moda**COMMUNICATE**[™]

moda**KWIK CONNECT**[™]




RoHS ✓



Certification Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, C-Tick, RoHS, & WEEE Compliant.

Class 1

Warranty 3 Year Limited Warranty

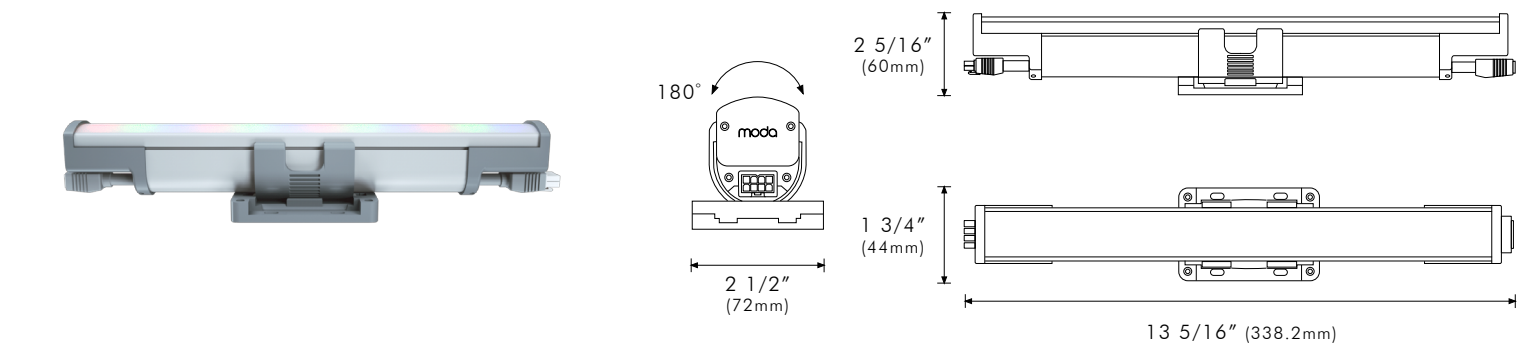

DMX


CCT	6°		10°		25°	
	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
RGB27K	1017	101.70	1005	100.50	991	99.10
RGB3K	1047	104.70	1035	103.50	1021	102.10
RGB35K	1059	105.90	1047	104.70	1033	103.30
RGB4K	1071	107.10	1059	105.90	1045	104.50

CCT	40°		10°x40°		30°x60°	
	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
RGB27K	981	98.10	972	97.20	969	96.90
RGB3K	1011	101.10	1002	100.20	999	99.90
RGB35K	1023	102.30	1014	101.40	1011	101.10
RGB4K	1035	103.50	1026	102.60	1023	102.30

CCT	30°x60°x5°	
	Lumens	Efficacy
RGB27K	967	96.70
RGB3K	997	99.70
RGB35K	1009	100.90
RGB4K	1021	102.10

Power Consumption
120-277V AC 10W

Max Run Lengths
120-277V AC 80ft

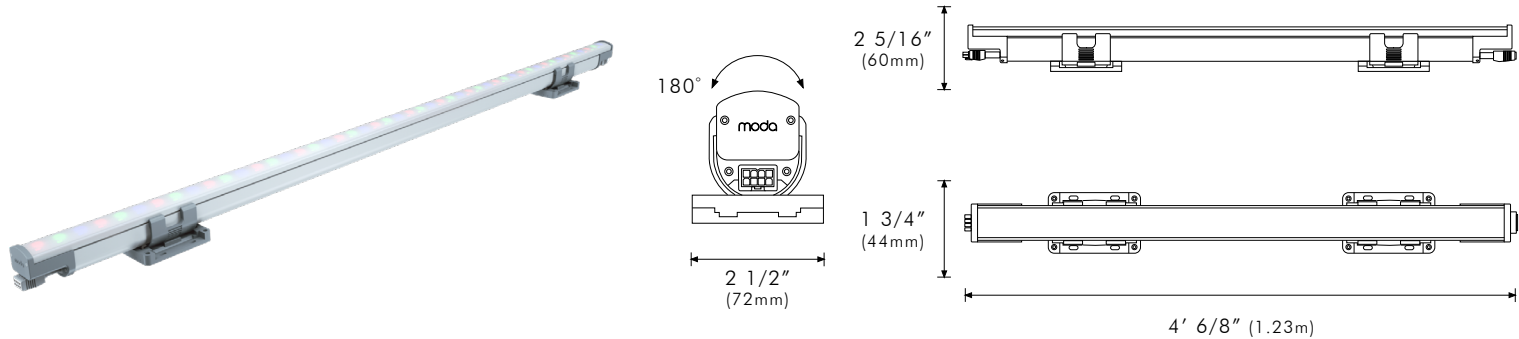

DMX

CCT	6°		10°		25°	
	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
RGB27K	3618	90.45	3756	93.90	3880	97.00
RGB3K	3738	93.45	3726	93.15	3712	92.80
RGB35K	3786	94.65	3774	94.35	3760	94.00
RGB4K	3834	95.85	3822	95.55	3808	95.20

CCT	40°		10°x40°		30°x60°	
	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy
RGB27K	3994	99.85	3573	89.32	3570	89.25
RGB3K	3702	92.55	3693	92.32	3690	92.25
RGB35K	3750	93.75	3741	93.52	3738	93.45
RGB4K	3798	94.95	3789	94.72	3786	94.65

CCT	30°x60°x5°	
	Lumens	Efficacy
RGB27K	3568	89.20
RGB3K	3688	92.20
RGB35K	3736	93.40
RGB4K	3784	94.60


Power Consumption

120-277V AC 40W

Max Run Lengths

120-277V AC 80ft

6° Beam Angle

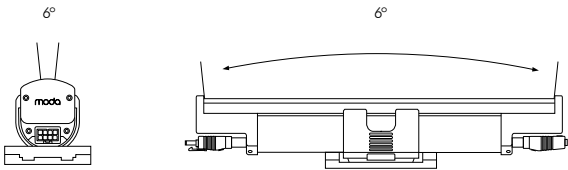

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	56.48 fc	202.21 fc	0.3 ft	0.2 ft
4.0 ft	14.12 fc	50.55 fc	0.7 ft	0.6 ft
6.0 ft	7.06 fc	25.27 fc	1.1 ft	1.0 ft
8.0 ft	3.53 fc	12.63 fc	1.5 ft	1.4 ft
10.0 ft	1.76 fc	6.31 fc	2.0 ft	1.9 ft
12.0 ft	1.41 fc	5.05 fc	2.4 ft	2.3 ft

■ Vert. Spread: 6° ■ Horiz. Spread: 6°

10° Beam Angle

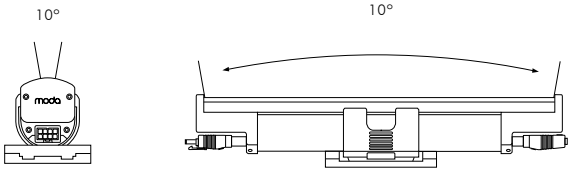

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	48.32 fc	168.43 fc	0.4 ft	0.3 ft
4.0 ft	10.58 fc	36.86 fc	0.8 ft	0.7 ft
6.0 ft	5.78 fc	20.80 fc	1.2 ft	1.1 ft
8.0 ft	2.88 fc	10.20 fc	1.6 ft	1.5 ft
10.0 ft	1.29 fc	5.80 fc	2.1 ft	2.0 ft
12.0 ft	1.03 fc	3.68 fc	2.5 ft	2.4 ft

■ Vert. Spread: 10° ■ Horiz. Spread: 10°

25° Beam Angle

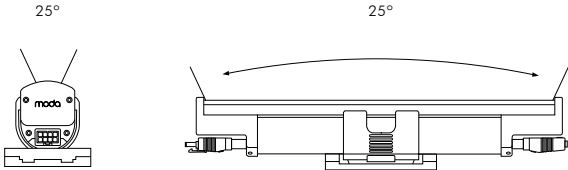

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	28.25 fc	102.97 fc	0.5 ft	0.5 ft
4.0 ft	7.06 fc	25.74 fc	1.0 ft	1.0 ft
6.0 ft	3.53 fc	12.87 fc	1.5 ft	1.6 ft
8.0 ft	1.76 fc	6.43 fc	2.0 ft	2.2 ft
10.0 ft	0.88 fc	3.21 fc	2.5 ft	2.7 ft
12.0 ft	0.70 fc	2.57 fc	3.0 ft	3.2 ft

■ Vert. Spread: 25° ■ Horiz. Spread: 25°

40° Beam Angle

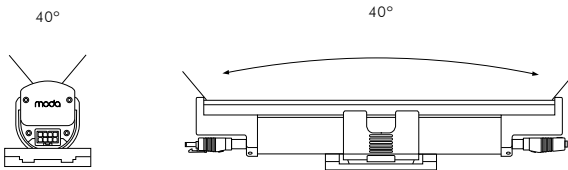

Polar Candela Distribution




Illuminance at a Distance

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	12.89 fc	47.86 fc	1.0 ft	0.8 ft
4.0 ft	3.88 fc	10.88 fc	1.9 ft	1.5 ft
6.0 ft	1.44 fc	5.93 fc	2.8 ft	2.4 ft
8.0 ft	0.80 fc	2.95 fc	3.8 ft	3.2 ft
10.0 ft	0.36 fc	1.39 fc	4.8 ft	4.0 ft
12.0 ft	0.28 fc	1.08 fc	5.7 ft	4.7 ft

■ Vert. Spread: 40° ■ Horiz. Spread: 40°

10°x40° Beam Angle

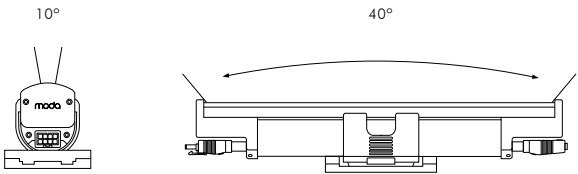

Polar Candela Distribution




Illuminance at a Distance


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	28.76 fc	105.71 fc	0.7 ft	0.5 ft
4.0 ft	7.19 fc	26.29 fc	1.5 ft	1.0 ft
6.0 ft	3.59 fc	13.14 fc	2.2 ft	1.4 ft
8.0 ft	1.79 fc	6.57 fc	3.0 ft	1.9 ft
10.0 ft	0.89 fc	3.28 fc	4.6 ft	2.4 ft
12.0 ft	0.71 fc	2.62 fc	4.4 ft	3.0 ft

■ Vert. Spread: 10° ▲ Horiz. Spread: 40°

30°x60° Beam Angle

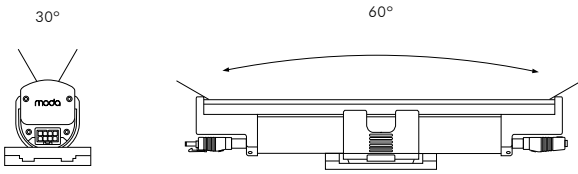

Polar Candela Distribution




Illuminance at a Distance


	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	73.12 fc	268.00 fc	1.3 ft	2.0 ft
4.0 ft	18.28 fc	67.00 fc	3.1 ft	4.7 ft
6.0 ft	9.14 fc	33.50 fc	4.0 ft	6.6 ft
8.0 ft	4.57 fc	16.75 fc	5.8 ft	9.3 ft
10.0 ft	2.28 fc	8.37 fc	7.0 ft	11.2 ft
12.0 ft	1.82 fc	6.70 fc	9.0 ft	14.0 ft

■ Vert. Spread: 30° ▲ Horiz. Spread: 60°

30°x60°x5° Beam Angle

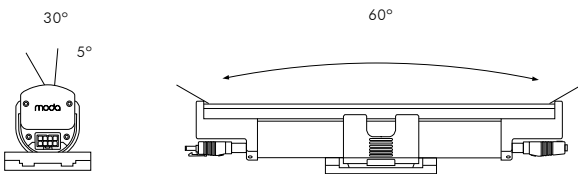


Polar Candela Distribution



Illuminance at a Distance

	Center Beam FC		Beam Width	
	1 Foot	4 Foot		
2.0 ft	10.59 fc	38.90 fc	1.3 ft	0.3 ft
4.0 ft	2.64 fc	9.72 fc	2.6 ft	0.9 ft
6.0 ft	1.32 fc	4.86 fc	3.9 ft	1.3 ft
8.0 ft	0.66 fc	2.43 fc	5.2 ft	1.6 ft
10.0 ft	0.33 fc	1.21 fc	6.5 ft	1.9 ft
12.0 ft	0.26 fc	0.97 fc	7.8 ft	2.6 ft

■ Vert. Spread: 30° ▲ Horiz. Spread: 60°

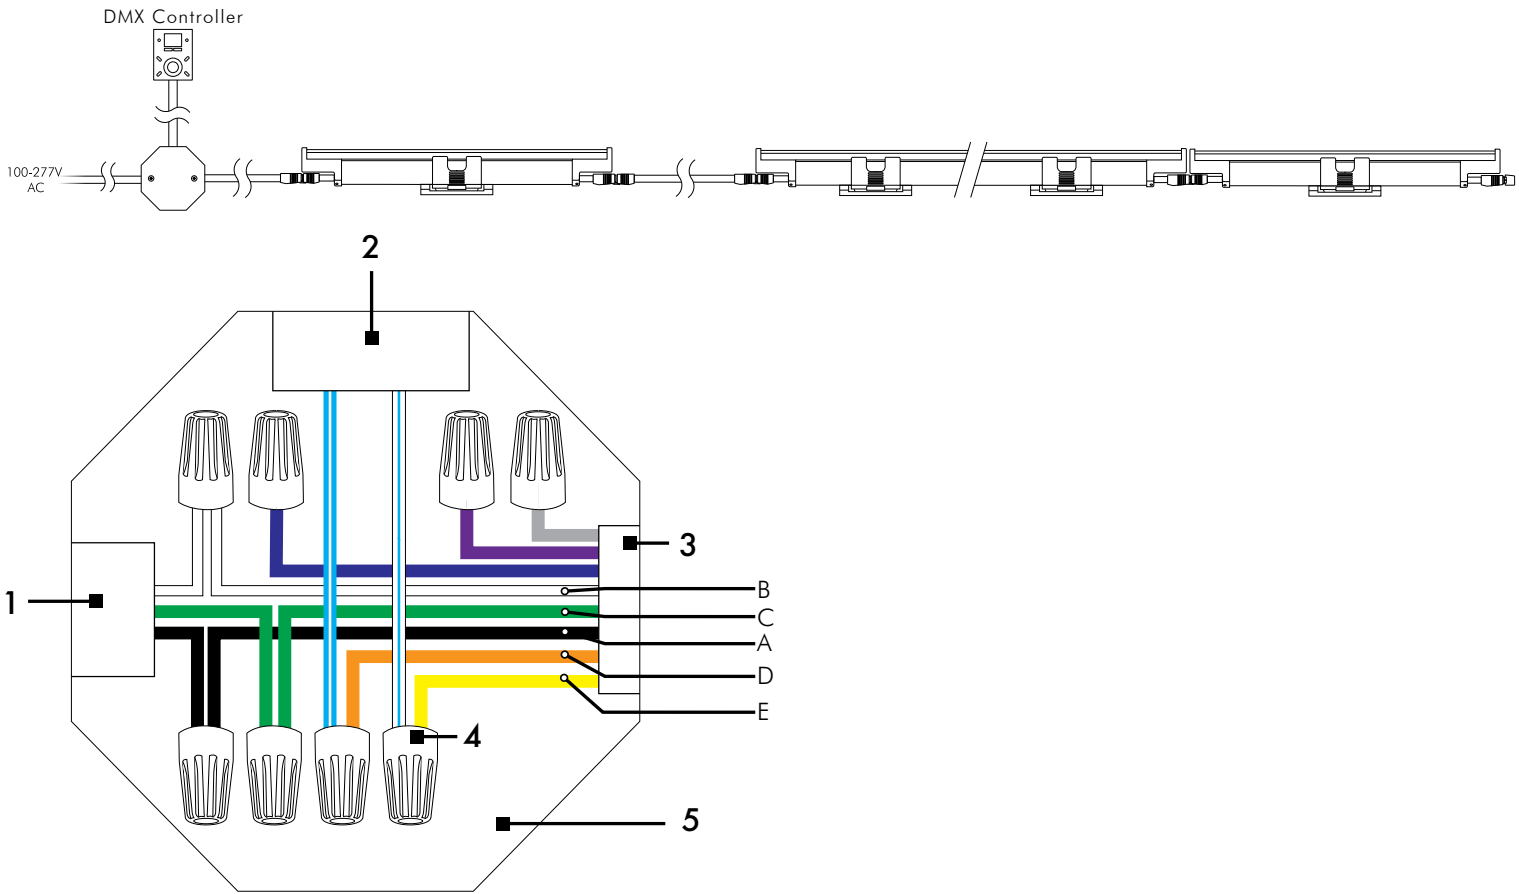

Wiring Legend

1	Power 100-277V AC
2	DMX Controller
3	8 Pin Leader Cable
4	Junction Box
5	Wiring Nuts


8 Pin Leader Cable

	UL/cUL	CE/CCC*
A 100-277V AC	Black	Brown
B Neutral	White	Blue
C Ground	Green	Green/Yellow
D Data Positive	Orange	Orange
E Data Negative	Yellow	Yellow


*Not illustrated

DMX Connectors


Male Output

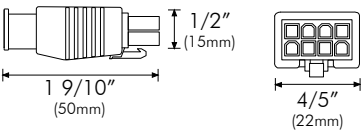

Female Output




Angle Adjustment




DMX LEADER CABLES

Moda Cove Interior 8 Pin Leader Cables


	UL/cUL	EU/CCC
Lengths	10ft and 25ft	3m and 7.62m
Color	Gray	Gray

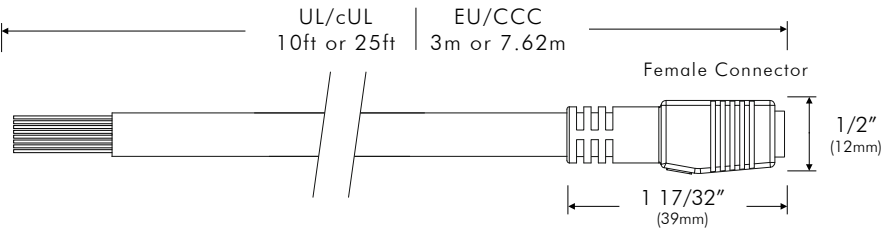

Female Connector

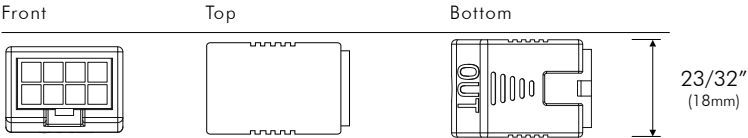

Pin Assignment




		UL/cUL	EU/CCC
1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/ Yellow
3	DMX Positive	Orange	Orange
4	DMX Negative	Yellow	Yellow


DMX JUMPER CABLES

Moda Cove Interior 8 Pin Jumper Cables


	UL/cUL	EU/CCC
Lengths	1ft and 4ft	300mm and 1m
Color	Gray	Gray

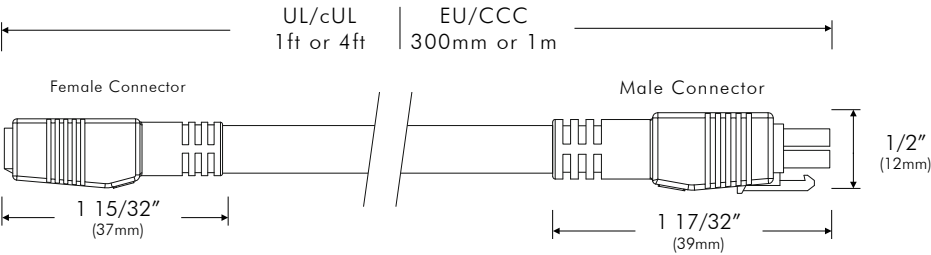


Connectors

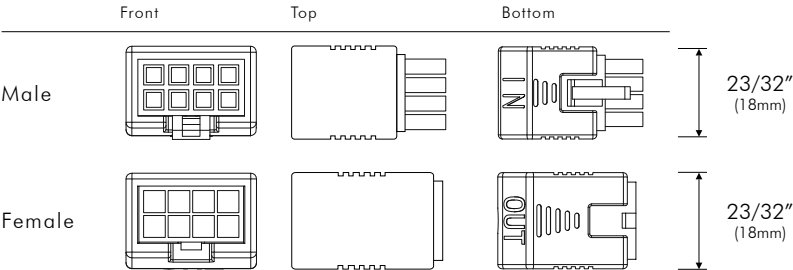

Pin Assignment



		UL/cUL	EU/CCC
1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/ Yellow
3	DMX Positive	Orange	Orange
4	DMX Negative	Yellow	Yellow



		UL/cUL	EU/CCC
1	Live 100-277V	Black	Brown
2	Neutral	White	Blue
3	Ground	Green	Green/ Yellow
4	DMX Positive	Orange	Orange
5	DMX Negative	Yellow	Yellow



COMPLETE SKU SAMPLE: MGI-HO-RGB3-1-365

A - FIXTURE & LOCATION

MGI	—	Moda Graze Interior
-----	---	---------------------

B - LIGHT OUTPUT

HO	—	High Output
----	---	-------------

C - LED COLOR

RGB27	—	Red Green, Blue, 2700K
RGB3	—	Red, Green, Blue, 3000K
RGB35	—	Red, Green, Blue, 3500K
RGB4	—	Red, Green, Blue, 4000K

D - LENGTH

1	—	1 FT
4	—	4 FT

E - OPTIC

6	—	6° x 6°
10	—	10° x 10°
25	—	25° x 25°
40	—	40° x 40°
140	—	10° x 40°
360	—	30° x 60°
365	—	30° x 60° x 5°

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 8 Pin 10ft	Power to first fixture of run	MLCI-US-8PIN-G-10FT
Leader Cable US 8 Pin 25ft	Power to first fixture of run	MLCI-US-8PIN-G-25FT
Jumper Cable US 8 Pin 1ft	Connection between fixtures	MJCI-US-8PIN-G-1FT
Jumper Cable US 8 Pin 4ft	Connection between fixtures	MJCI-US-8PIN-G-4FT
Leader Cable EU 8 Pin 3m	Power to first fixture of run	MLCI-EU-8PIN-G-3M
Leader Cable EU 8 Pin 7.62m	Power to first fixture of run	MLCI-EU-8PIN-G-7.62M
Jumper Cable EU 8 Pin 300mm	Connection between fixtures	MJCI-EU-8PIN-G-300MM
Jumper Cable EU 8 Pin 1m	Connection between fixtures	MJCI-EU-8PIN-G-1M
Terminator 8 Pin	Must be fixed to last fixture for safety	MTI-8PIN-G
Interior Bracket Lock	Holds fixture in place for vertical installations	MCGI-BL-G

CONTROLS	DESCRIPTION	SKU
Kandi Touch	DMX 512 Controller Available in black and white	KND-TCH-B KND-TCH-W

CONTROL ACCESSORIES	DESCRIPTION	SKU
Belden Shielded Cable 500ft	RS-458 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	BDL-9841-500FT
Belden Shielded Cable 1000ft	RS-458 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	BDL-9841-1000FT