

Create Unlimited Runs of Continuous Solid Lines of Light.
Complete lighting solution that offers 180 degree viewing angle that easily bends against its line of light (opposite bend to Super Neon Edge). Ultra flexible, bends easily, free from any form of shape memory. Create endless contours, forms, lines, curves and shapes of powerful solid light. Transparent ends allows for unlimited run lengths, combined with integral "No Tool" connectors and simple leader/jumper cables. UV protected IP67. Wet location rated.




OUTPUT

Delivered Lumens	93.04
CCT & SDMC	2700K - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.4715 y: 0.4276 u: 0.2624 v: 0.5354
Color Bin Tolerance	+ 3% / -3%
Efficacy (lm/w)	19.88
CRI	88
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	24V DC
Power Consumption	4.68W (0.04A)
Power Factor	≤ 1
Control	100-277V 0-10V & Magnetic Low Voltage

CIE 1931 CHROMATICITY DIAGRAM




LUMINANCE DATA (cd/sq.m)

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	8221	8194	8008
55	7863	7834	7667
65	7316	7413	7413
75	6222	7250	7939
85	3935	10796	13849

PHYSICAL


Applications	Accent Linear / Curved Surfaces, Architectural Highlights
Dimensions	Length 11 7/8" (300mm) Width 5/8" (16mm) Height 1 1/8" (28mm)
Weight	4.8 oz (136g)
Construction	UV Resistant Tough White Flexible PVC
Thermal Management	Cool to Touch, Free Air Convection
Optics	N/A
Fixture Connections	Male and Female Barrel Connectors
Operating Temperature	-4°F ~ 113°F (-20°C ~ 45°C)
Storage Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Humidity	0-95% Non Condensing

DIMENSIONS

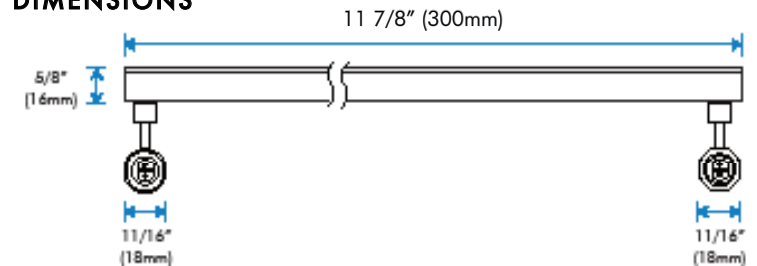


CONNECTOR DIMENSIONS

Bottom Feed



Side Feed

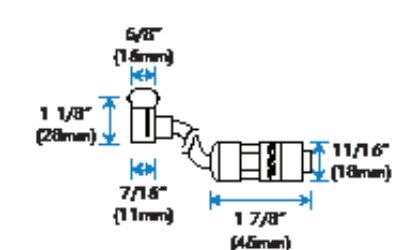

Project Name:


Notes:

STANDARDS & CERTIFICATIONS




LM 79 LM 80 3 YEAR WARRANTY

ILLUMINANCE AT A DISTANCE

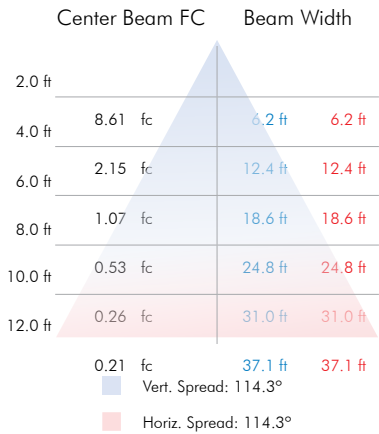

POLAR CANDELA DISTRIBUTION

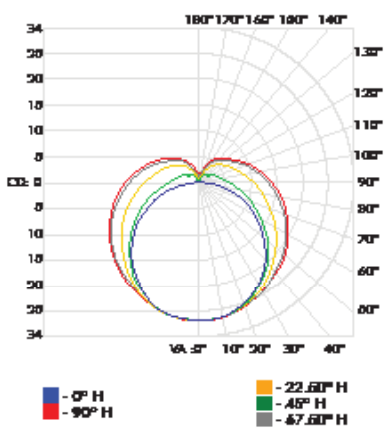

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	24.56	N.A.	26.40%
0-40	40.20	N.A.	43.20%
0-60	71.00	N.A.	76.30%
60-90	18.50	N.A.	19.90%
0-90	93.04	N.A.	100.00%
90-180	0.00	N.A.	0.00%
0-180	93.04	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Lamp	% Fixt
0-10	3.00	N.A.	3.22%
10-20	8.57	N.A.	9.22%
20-30	13.00	N.A.	13.97%
30-40	15.63	N.A.	16.80%
40-50	16.18	N.A.	17.40%
50-60	14.62	N.A.	15.72%
60-70	11.30	N.A.	12.14%
70-80	7.20	N.A.	7.73%
80-90	3.52	N.A.	3.79%
90-100	0.00	N.A.	0.00%

WIRING

UL / cUL Non-Dimming

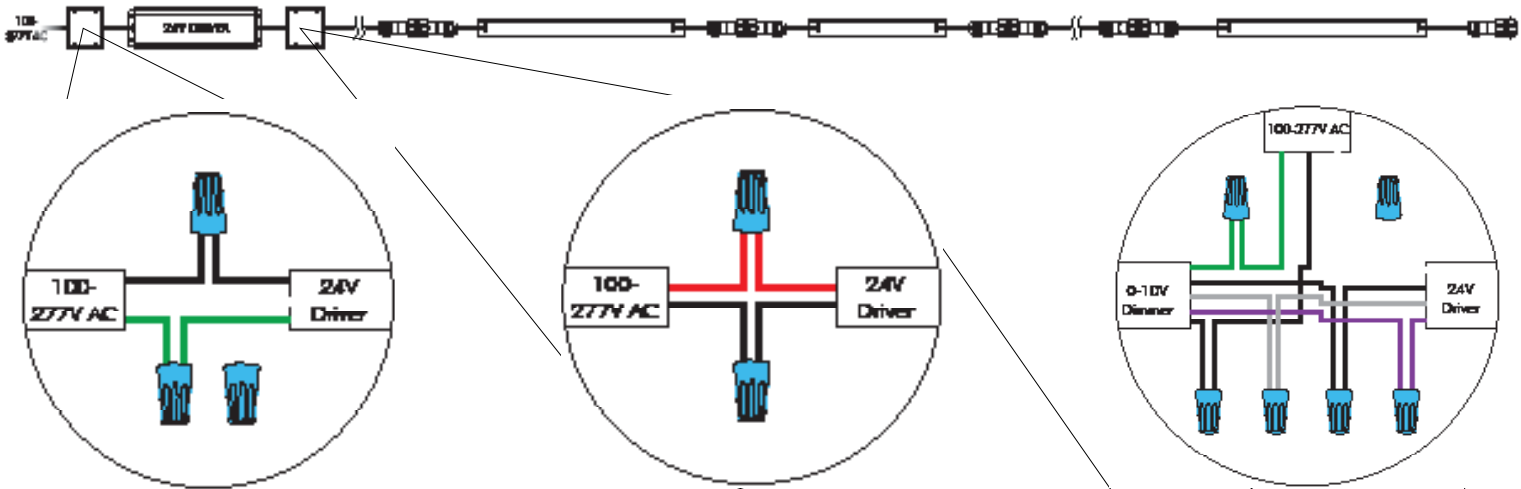

UL / cUL 0-10V Dimming



WIRING LEGEND

Power (100-277V AC)	24V Driver	0-10V Dimmer
Power Positive	Power Positive	Power In
Power Negative	Power Negative	Power Out
Ground		Ground
		Data Positive
		Data Negative

MAX CONTINUOUS RUN

150W Driver 30ft

ACCESSORIES



SN-LDR-CBL-5FT
5' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
5' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



SN-LDR-CBL-10FT
10' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
10' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



SN-LDR-CBL-20FT
20' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
20' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



SN-JMP-CBL-1FT
1' Jumper Cable

Connects Two SUPER NEON Together

Connector Dimension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)



SN-T
Terminator

Terminates SUPER NEON Fixture

L: 1" (25mm)
W: 11/16" (18mm)
H: 1/4" (7mm)



SNX-CLP-S2
Aluminum Mounting Clip

Aluminum Mounting Clip for SUPER NEON X

L: 2" (50mm)
W: 5/8" (17mm)
H: 15/16" (24mm)



SNX-XTR-1F
1' Aluminum Xtrusion®

1' Aluminum Xtrusion for SUPER NEON X

L: 1' (305mm)
W: 5/8" (17mm)
H: 15/16" (24mm)



SNX-XTR-4F
4' Aluminum Xtrusion®

4' Aluminum Xtrusion for SUPER NEON X

L: 4' (1.22m)
W: 5/8" (17mm)
H: 15/16" (24mm)

24V 0-10V Dimming Driver



MP89
100 - 277V

150W - IP66

L: 9 1/2" (241mm)
W: 2 5/8" (67mm)
H: 1 5/8" (40.5mm)

24V Non-Dimming Driver



MP17
100 - 277V AC

150W - IP67

L: 8 11/16" (222mm)
W: 2 11/16" (68mm)
H: 1 1/2" (39mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	3
Environment	Wet Location - IP67
Warranty	3 Year Limited Warranty

ORDERING

Bottom Feed	SNX-D-BF-2700K-1FT
Side Feed	SNX-D-SF-2700K-1FT