


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO #: _____ Quantity: _____

Notes: _____

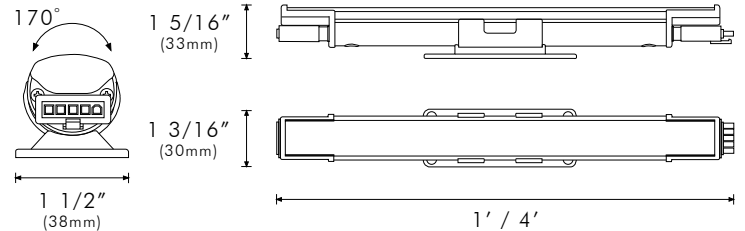

PHYSICAL

Lengths	1ft (304mm) / 4ft (1.22m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)
Humidity	20-70% Non Condensing

SPECIFICATIONS

	Lumens	Efficacy
RGB27K 1FT	201.95	42.07
RGB27K 4FT	807.78	44.29
RGB3K 1FT	246.63	51.38
RGB3K 4FT	986.53	54.09
RGB35K 1FT	251.10	52.31
RGB35K 4FT	1004.39	55.07
RGB4K 1FT	273.35	56.95
RGB4K 4FT	1093.40	59.95

OUTPUT

Colors	RGB27K, RGB3K, RGB35K, RGB4K
Beam Angle	30° x 100°
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hrs L50 @ 25°C/70,000 Hrs L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	DMX 512 Controlled
Power Factor	≥ 0.98

POWER CONSUMPTION

	120V AC (SO/HO)	277V AC (SO/HO)
1 Foot	5W / 10W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W

MAX RUN LENGTHS

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

STANDARDS & CERTIFICATIONS



Tested to UL & CSA by Intertek For Use in USA & CANADA.

Certification	Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

NAME		SKU
1FT	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 1FT	MMGI-S-Sx-S-0-RGB27H-1
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 1FT	MMGI-S-Sx-S-0-RGB3H-1
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 1FT	MMGI-S-Sx-S-0-RGB35H-1
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 1FT	MMGI-S-Sx-S-0-RGB4H-1
4FT	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 4FT	MMGI-S-Sx-S-0-RGB27H-4
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 4FT	MMGI-S-Sx-S-0-RGB3H-4
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 4FT	MMGI-S-Sx-S-0-RGB35H-4
	Moda Mini Graze Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 4FT	MMGI-S-Sx-S-0-RGB4H-4

ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.