


### Create Unlimited Runs of Continuous Solid Lines of Light.

Complete lighting solution that offers a low profile and easily bends along it's line of light (opposite bend to Super Neon X Dome & Flat). Ultra flexible, bends easily, free from any form of shape memory. Create endless contours, forms, lines, curves and shapes of powerful solid light. Transparent ends allows for unlimited run lengths, combined with integral "No Tool" connectors and simple leader/jumper cables. UV protected IP67 Wet Location Rated.

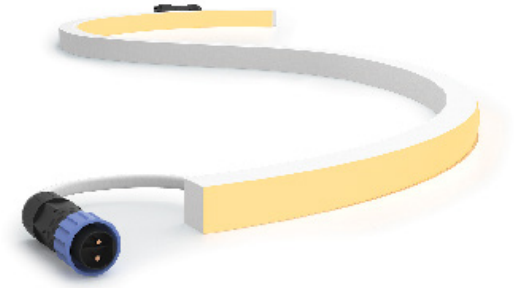


## OUTPUT

Delivered Lumens	453.48
CCT & SDMC	N/A
Chromaticity Coordinates	x: 0.5800 y: 0.4188 u: 0.3379 v: 0.5490
Color Bin Tolerance	N/A
Efficacy (lm/w)	16.77
Wavelength	590nm
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

Input Voltage	24V DC
Power Consumption	27.04W (0.22A)
Power Factor	≤ 1
Control	100 - 277V 0-10V & Magnetic Low Voltage

## CIE 1931 CHROMATICITY DIAGRAM



## LUMINANCE DATA (cd/sq.m)

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	1171	864	840
55	1102	819	819
65	1017	796	806
75	876	795	808
85	731	820	839


Project Name:

Notes:

## PHYSICAL


Applications	Accent Linear / Curved Surfaces, Architectural Highlights
Dimensions	Length 8' 3/16" (2.44m) Width 5/8" (16mm) Height 9/16" (15mm)
Weight	38.4 oz (1,089g)
Construction	UV Resistant Tough White Flexible PVC
Thermal Management	Cool to Touch, Free Air Convection
Optics	N/A
Fixture Connections	Male and Female Barrel Connectors
Operating Temperature	-4°F ~ 113°F (-20°C ~ 45°C)
Storage Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Humidity	0-95% Non Condensing

## DIMENSIONS

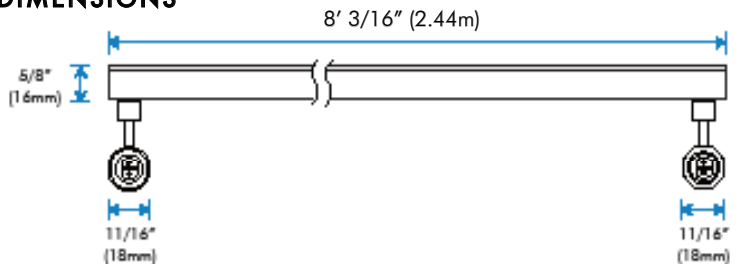

## CONNECTOR DIMENSIONS

### Bottom Feed



## STANDARDS & CERTIFICATIONS



ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	41.98 fc	6.4 ft 5.7 ft
4.0 ft	10.49 fc	12.8 ft 11.4 ft
6.0 ft	5.24 fc	19.2 ft 17.0 ft
8.0 ft	2.62 fc	25.6 ft 22.7 ft
10.0 ft	1.31 fc	32.0 ft 28.4 ft
12.0 ft	1.04 fc	38.4 ft 34.1 ft

Vert. Spread: 116.0°

Horiz. Spread: 109.7°

POLAR CANDELA DISTRIBUTION

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	68.02	N.A.	15.00%
0-40	113.37	N.A.	25.00%
0-60	215.40	N.A.	47.50%
60-90	92.50	N.A.	20.40%
0-90	344.19	N.A.	75.90%
90-180	108.83	N.A.	24.00%
0-180	453.48	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Lamp	% Fixt
0-10	8.16	N.A.	1.80%
10-20	23.53	N.A.	5.19%
20-30	36.23	N.A.	7.99%
30-40	45.30	N.A.	9.99%
40-50	50.42	N.A.	11.12%
50-60	51.51	N.A.	11.36%
60-70	49.38	N.A.	10.89%
70-80	43.48	N.A.	9.59%
80-90	36.86	N.A.	8.13%
90-100	30.51	N.A.	6.73%

WIRING

UL / cUL Non-dimming

UL / cUL 0-10V Dimming

WIRING LEGEND

Power (100-277V AC)	24V Driver	0-10V Dimmer
Power Positive	Power Positive	Power In
Power Negative	Power Negative	Power Out
Ground		Ground
		Data Positive
		Data Negative

MAX CONTINUOUS RUN

150W Driver	30ft

## ACCESSORIES



**SN-LDR-CBL-5FT**  
5' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
5' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



**SN-LDR-CBL-10FT**  
10' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
10' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



**SN-LDR-CBL-20FT**  
20' Leader Cable

Connects SUPER NEON to Power Supply

Cable Dimension	Connector Dimension
20' (3m)	L: 1 3/8" (30mm)
	W: 5/8" (17mm)
	H: 1/2" (14mm)



**SN-JMP-CBL-1FT**  
1' Jumper Cable

Connects Two SUPER NEON Together

Connector Dimension
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)



**SN-T**  
Terminator

Terminates SUPER NEON Fixture

L: 1" (25mm)
W: 11/16" (18mm)
H: 1/4" (7mm)



**SNE-CLP-S2**  
Aluminum Mounting Clip

Aluminum Mounting Clip for SUPER NEON EDGE

L: 1 3/8" (35mm)
W: 5/8" (17mm)
H: 15/16" (24mm)



**SNE-XTR-1F**  
1' Aluminum Xtrusion®

1' Aluminum Xtrusion for SUPER NEON EDGE

L: 1' (305mm)
W: 5/8" (17mm)
H: 15/16" (24mm)



**SNE-XTR-4F**  
4' Aluminum Xtrusion®

4' Aluminum Xtrusion for SUPER NEON EDGE

L: 4' (1.22m)
W: 5/8" (17mm)
H: 15/16" (24mm)

## 24V 0-10V Dimming Driver



**MP89**  
100 - 277V

150W - IP66

L: 9 1/2" (241mm)
W: 2 5/8" (67mm)
H: 1 5/8" (40.5mm)

## 24V Non-Dimming Driver



**MP17**  
100 - 277V AC

150W - IP67

L: 8 11/16" (222mm)
W: 2 11/16" (68mm)
H: 1 1/2" (39mm)

## STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	3
Environment	Wet Location - IP67
Warranty	3 Year Limited Warranty

## ORDERING

Bottom Feed

**SNE-BF-A-8FT**