Create Unlimited Runs of Continuous Solid Lines of Light.

Complete lighting solution that offers a low profile and easily bends against it's line of light (opposite bend to Super Neon Edge). Ultra flexible, bends easily, free from any form of shape memory. Create endless contours, forms, lines, curves and shapes of powerful solid light. Transparent ends allows for unlimited run lengths, combined with integral "No Tool" connectors and simple leader/jumper cables. UV protected IP67 Wet Location Rated.

OUTPUT

Delivered Lumens	527.88
CCT & SDMC	3000K - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.4494 y: 0.4349 u: 0.2438 v: 0.5374
Color Bin Tolerance	+ 3% / -3%
Efficacy (lm/w)	28.19
CRI	88
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

|	
Input Voltage	24V DC
Power Consumption	18.72W (0.78A)
Power Factor	≤ 1
Control	100 - 277V 0-10V & Magnetic Low Voltage

PHYSICAL

Applications	Accent Linear / Curved Surfaces, Architectural Highlights
Dimensions	Length 3' 11 3/16" (1.20m) Width 7/16" (11mm) Height 7/8" (21mm)
Weight	19.2 oz (544g)
Construction	UV Resistant Tough White Flexible PVC
Thermal Management	Cool to Touch, Free Air Convection
Optics	N/A
Fixture Connections	Male and Female Barrel Connectors
Operating Temperature	-4°F ~ 113°F (-20°C ~ 45°C)
Storage Temperature	-4°F ~ 122°F (-20°C ~ 50°C)
Humidity	0-95% Non Condensing

DIMENSIONS
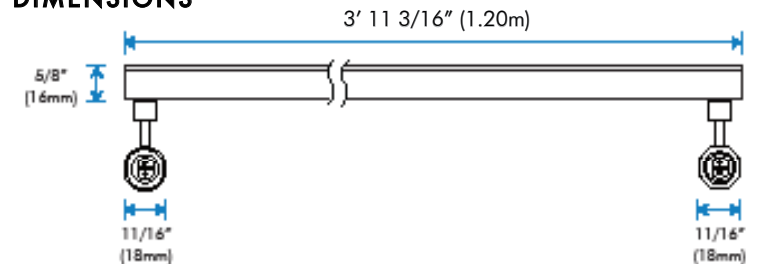
CONNECTOR DIMENSIONS

Bottom Feed

Side Feed

CIE 1931 CHROMATICITY DIAGRAM

0.4494, 0.4349

LUMINANCE DATA
(cd/sq.m)

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	5177	3841	3740
55	4848	3617	3637
65	4453	3503	3586
75	3903	3480	3601
85	3361	3598	3700
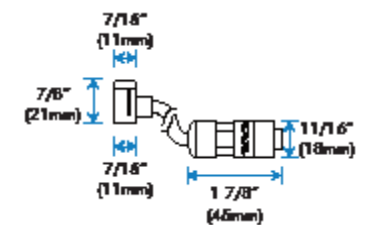
Project Name:

Notes:

STANDARDS & CERTIFICATIONS

LM 79   LM 80   3 YEAR WARRANTY

ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width	
2.0 ft	48.87 fc	6.3 ft	5.9 ft
4.0 ft	12.21 fc	12.6 ft	11.8 ft
6.0 ft	6.10 fc	18.9 ft	17.7 ft
8.0 ft	3.05 fc	31.6 ft	29.4 ft
10.0 ft	1.52 fc	31.6 ft	29.4 ft
12.0 ft	1.22 fc	37.9 ft	35.3 ft

Vert. Spread: 115.3°
Horiz. Spread: 114.9°
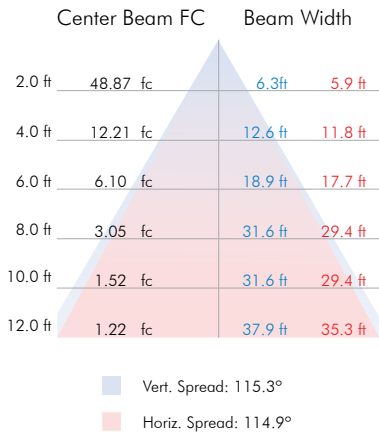
POLAR CANDELA DISTRIBUTION

- 22.50° H
- 45° H
- 67.50° H
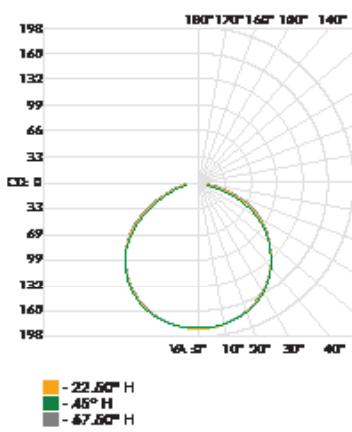
ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	79.18	N.A.	15.00%
0-40	132.49	N.A.	25.10%
0-60	251.27	N.A.	47.60%
60-90	107.15	N.A.	20.30%
0-90	401.18	N.A.	76.00%
90-180	126.69	N.A.	24.00%
0-180	527.88	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Lamp	% Fixt
0-10	9.55	N.A.	1.81%
10-20	27.50	N.A.	5.21%
20-30	42.38	N.A.	8.03%
30-40	52.89	N.A.	10.02%
40-50	58.85	N.A.	11.15%
50-60	60.01	N.A.	11.37%
60-70	56.85	N.A.	10.77%
70-80	50.46	N.A.	9.56%
80-90	42.65	N.A.	8.08%
90-100	35.31	N.A.	6.69%

WIRING

UL / cUL Non-Dimming

UL / cUL 0-10V Dimming
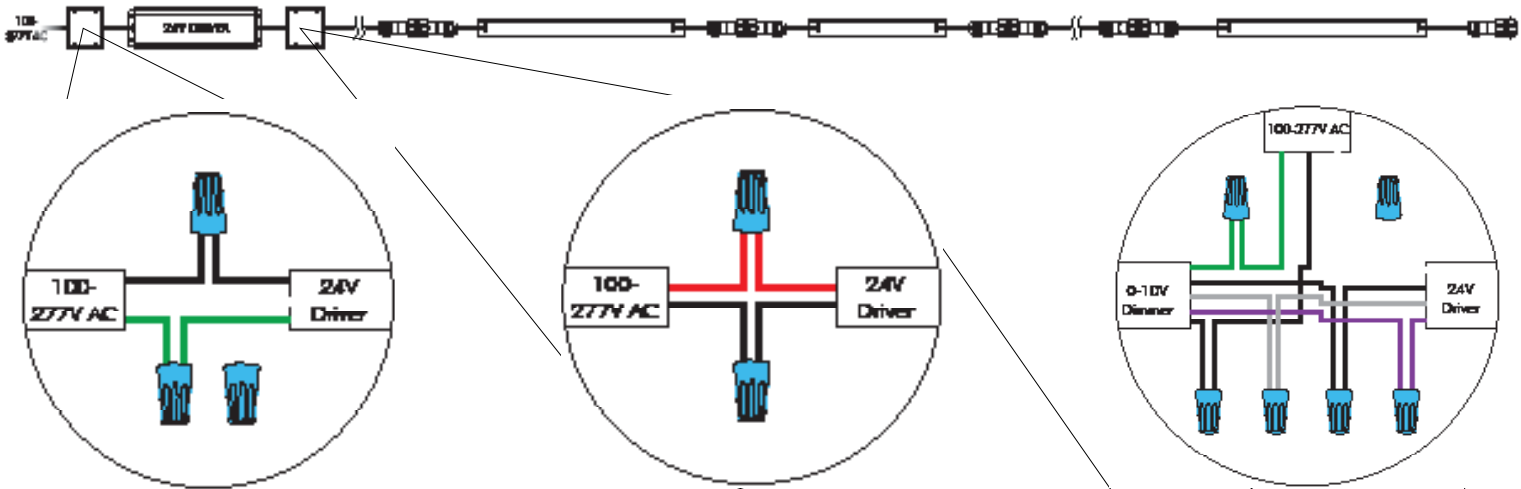
WIRING LEGEND

Power (100-277V AC)
- Power Positive
- Power Negative
- Ground

24V Driver
- Power Positive
- Power Negative

0-10V Dimmer
- Power In
- Power Out
- Ground
- Data Positive
- Data Negative

MAX CONTINUOUS RUN

150W Driver   30ft

ACCESSORIES

SN-LDR-CBL-5FT 5' Leader Cable	SN-LDR-CBL-10FT 10' Leader Cable	SN-LDR-CBL-20FT 20' Leader Cable	SN-JMP-CBL-1FT 1' Jumper Cable
Connects SUPER NEON to Power Supply	Connects SUPER NEON to Power Supply	Connects SUPER NEON to Power Supply	Connects Two SUPER NEON Together

SN-LDR-CBL-5FT
Cable Dimmension: 5' (3m)
Connector Dimmension:
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-LDR-CBL-10FT
Cable Dimmension: 10' (3m)
Connector Dimmension:
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-LDR-CBL-20FT
Cable Dimmension: 20' (3m)
Connector Dimmension:
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-JMP-CBL-1FT
Connector Dimmension:
L: 1 3/8" (30mm)
W: 5/8" (17mm)
H: 1/2" (14mm)

SN-T Terminator
Terminates SUPER NEON Fixture
L: 1" (25mm)
W: 11/16" (18mm)
H: 1/4" (7mm)

SNX-CLP-S2 Aluminum Mounting Clip
Aluminum Mounting Clip for SUPER NEON X
L: 2" (50mm)
W: 5/8" (17mm)
H: 15/16" (24mm)

SNX-XTR-1F 1' Aluminum Xtrusion®
1' Aluminum Xtrusion for SUPER NEON X
L: 1' (305mm)
W: 5/8" (17mm)
H: 15/16" (24mm)

SNX-XTR-4F 4' Aluminum Xtrusion®
4' Aluminum Xtrusion for SUPER NEON X
L: 4' (1.22m)
W: 5/8" (17mm)
H: 15/16" (24mm))

24V 0-10V Dimming Driver

MP89 100 - 277V
150W - IP66
L: 9 1/2" (241mm)
W: 2 5/8" (67mm)
H: 1 5/8" (40.5mm)

24V Non Dimming Driver

MP17 100-277V AC
150W - IP67
L: 8 11/16" (222mm)
W: 2 11/16" (68mm)
H: 1 1/2" (39mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	3
Environment	Wet Location - IP67
Warranty	3 Year Limited Warranty

ORDERING

Bottom Feed	SNX-F-BF-3000K-4FT
Side Feed	SNX-F-SF-3000K-4FT