


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

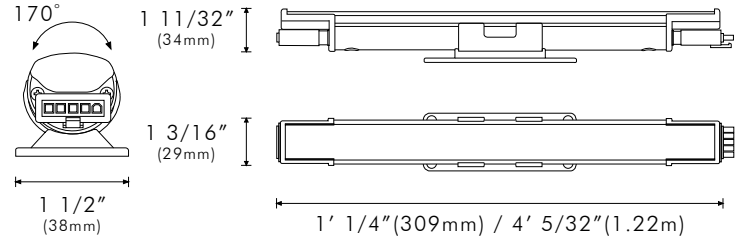

## PHYSICAL

<b>Dimensions</b>	L: 1ft 1/4in (308mm) L: 4ft 5/32in(1.22m)	W: 1 3/16in(29mm) H: 1 1/2in(38mm)
<b>Weight</b>	1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg)	
<b>Applications</b>	Cove, Accent, & Indirect General Illumination	
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens	
<b>Ingress Protection</b>	Dry/Damp Location IP52	
<b>Thermal Management</b>	Moda Aluminum Heat Sink	
<b>Fixture Connections</b>	Integral Male & Female Connectors	
<b>Operating Temperature</b>	-4°F ~ 149°F (-20°C ~ 65°C)	
<b>Storage Temperature</b>	-13°F ~ 158°F (-25°C ~ 70°C)	
<b>Humidity</b>	20-70% Non Condensing	

## SPECIFICATIONS

	<b>Lumens</b>	<b>Efficacy</b>
RGB27K 1FT	210.36	35.36
RGB27K 4FT	841.44	38.07
RGB3K 1FT	256.91	43.54
RGB3K 4FT	1027.64	46.71
RGB35K 1FT	261.56	44.33
RGB35K 4FT	1046.24	47.55
RGB4K 1FT	284.74	48.26
RGB4K 4FT	1138.96	51.77

## POWER CONSUMPTION

	<b>120V AC</b>	<b>240V AC</b>	<b>277V AC</b>
<b>1 Ft</b>	5.9W	6.3W	6.5W
<b>4 Ft</b>	22W	22.1W	22.2W

## OUTPUT

<b>Colors</b>	RGB27K, RGB3K, RGB35K, RGB4K
<b>Beam Angle</b>	200°
<b>Color Bin Tolerance</b>	Zero Bin
<b>Lumen Maintenance</b>	90,000 Hrs L70 @ 25°C 70,000 Hrs L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	DMX 512
<b>Power Factor</b>	≥ 0.98

## MAX CONTINUOUS RUN

	<b>120V AC</b>	<b>240V AC</b>	<b>277V AC</b>
<b>SO</b>	120 ft	240 ft	240 ft

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
----------------------	---

<b>Class</b>	1
<b>Warranty</b>	5 Year Limited Warranty

FIXTURE		SKU
1 FT	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 1FT	105-1205
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 1FT	105-1206
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 1FT	105-1208
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 1FT	105-1209
4 FT	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 4FT	105-3205
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 4FT	105-3206
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 4FT	105-3208
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 4FT	105-3209

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	299-0100
Leader Cable US 5 Pin 25ft	Power to first fixture of run	299-0102
Jumper Cable US 5 Pin 1ft	Connection between fixtures	299-1100
Jumper Cable US 5 Pin 4ft	Connection between fixtures	299-1102
Leader Cable EU 5 Pin 3m	Power to first fixture of run	299-0101
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	299-0103
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	299-1101
Jumper Cable EU 5 Pin 1m	Connection between fixtures	299-1103
Terminator 5 Pin	Must be fixed to last fixture for safety	299-2100
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	299-3200

CONTROLS	DESCRIPTION	SKU
Kandi Touch	DMX 512 Controller	KND-TCH-B
	Available in black and white	KND-TCH-W

CONTROL ACCESSORIES	DESCRIPTION	SKU
Moda DMX Wiring Hub 2.0	Simplifies wiring and strengthens DMX signal.	250-0100
Belden Shielded Cable 500ft	RS-458 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	BDL-9841-500FT
Belden Shielded Cable 1000ft	RS-458 Cable for DMX, 24 AWG stranded TC conductors, polyethylene insulation	BDL-9841-1000FT