moda**LIGHT**®
PRODUCT SUMMARY
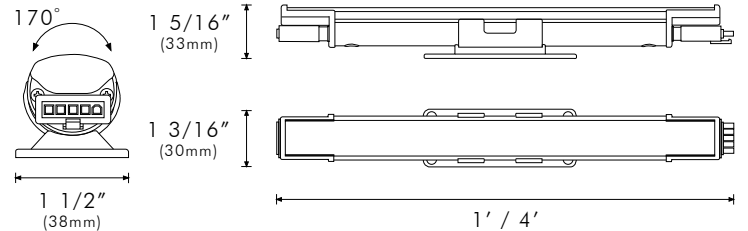
Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

170°   1 5/16" (33mm)   1 3/16" (30mm)   1 1/2" (38mm)   1' / 4'

PHYSICAL

Lengths	1ft (304mm) / 4ft (1.22m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~70°C)
Humidity	20-70% Non Condensing

SPECIFICATIONS

	Lumens	Efficacy
DYNAMIC WHITE 1FT	401.86	80.37
DYNAMIC WHITE 4FT	1607.42	84.60

POWER CONSUMPTION

	120V AC	277V AC
1 Foot	5W	6.5W
4 Foot	19W	20W

OUTPUT

Colors	Dynamic White (2200K - 6500K)
Beam Angle	30° X 100°
CRI	90 - 98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	DMX 512 Controlled
Power Factor	≥ 0.98

MAX RUN LENGTHS

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

STANDARDS & CERTIFICATIONS

ETL CE CCC C-Tick RoHS✓ WEEE

Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

moda **LIGHT**®
P R O D U C T   S U M M A R Y

	NAME	SKU
1FT	Moda Mini Graze Interior Standard Output Silver DMX 512 Dynamic White HCRI 1FT	MMGI-S-Sx-S-DWH-1
4FT	Moda Mini Graze Interior Standard Output Silver DMX 512 Dynamic White HCRI 4FT	MMGI-S-Sx-S-DWH-4

ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.