

# modaLIGHT<sup>®</sup>

## SPECIFICATION

The Pharos RDM (Remote Device Management) is a 4 port DMX512 Splitter compatible with the RDM standard to provide DMX output to luminaires and other devices.


# PHAROS RDM



### SPECIFICATION

Certifications	CE compliant, ETL/cETL listed
Power	9-48V DC (4W typical)
Temperature	0°C to 50°C (32°F to 122°F)
Physical	6 unit wide DIN rail mounting enclosure (DIN43880 / EN60715 (35/7.5 rail))
Weight	0.5 kg (1.1 lbs)
Shipping	20 x 15 x 12 cm (8" x 6" x 5") 0.5 kg (1.1 lbs)
Warranty	5 years

### DIMENSIONS

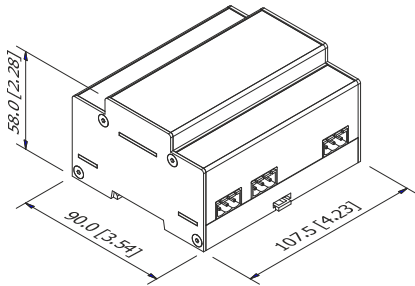

### STANDARDS & CERTIFICATIONS



### INTERFACES

DMX/RDM Input	DMX512 port, RDM compatible *
DMX/RDM Input	DMX512 port, RDM compatible *
DMX/RDM Input	Four DMX512 ports, RDM compatible *

\* Install-friendly 0.200" (5.08mm) plug in rising clamp connectors (included)

### ORDER CODE & VARIANTS

RDM	Unmanaged PoE Ethernet Switch (4+1 Port: 4 PoE, 1 non-PoE)
-----	--

Project Name: \_\_\_\_\_

Notes: \_\_\_\_\_