

modaLIGHT[®]

SPECIFICATION

MODA E-GRAZE[®] INTERIOR 2700K HCRI 1FT

Line Voltage LED Linear System.

E-GRAZE is a wall wash/graze Lighting System. Powerful, delivering 480 lm/ft and discreet with a height of just 1 7/10" (43.6mm). Integral 30°x100° optics graze up to 15ft. 0% Synchronized dimming. CRI 96-98. R1-15 >90. 100-277v Universal Input. Achieve long runs of up to 230ft (277v). 6w power consumption. 2 Step MacAdam Ellipse. No color over angle, no striations, no dark spots. Cool to the touch.




OUTPUT

Delivered Lumens	434.40
CCT & SDMC	2700k - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.4592 y: 0.4090 u: 0.2587 v: 0.5246
Color Bin Tolerance	Single Bin
Efficacy (lm/w)	72.40
CRI	98
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277v AC 50Hz/60Hz
Power Consumption	6w (0.05A)
Power Factor	≥ 0.96
Dimming	Electronic Low Voltage Reverse Phase Trailing Edge
Emergency	N/A

CIE 1931 CHROMATICITY DIAGRAM




R VALUES

R1	R2	R3	R4	R5
99	99	97	99	99
R6	R7	R8	R9	R10
97	97	95	93	98
R11	R12	R13	R14	R15
97	90	99	97	98


PHYSICAL

Applications	Grazer, Accent & Indirect General Illumination
Dimensions	Length 1' (305mm) Width 1 3/5" (40mm) Height 1 7/10" (43.60mm)
Weight	11.2oz (318g)
Construction	Polycarbonate Body, Polycarbonate Lens
Thermal Management	Natural Convection
Optics	30° x 100°
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-22°F ~ 122°F (-30°C ~ 70°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

DIMENSIONS

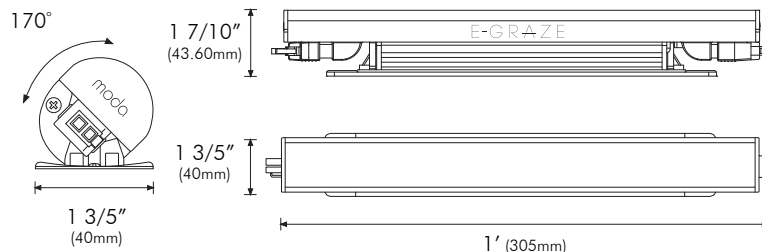

CONNECTOR DIMENSIONS



MODA TECHNOLOGY

modaBIN™	modaKWIK CONNECT™
modaCUE™	modaLINEAR OPTIC™
modaDRIVER™	modaPHOSPHOR™
modaHIGH CRI	modaSOFT™

STANDARDS & CERTIFICATIONS



Project Name:

Notes:

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

VDC20172803
955 White Drive Las Vegas, NV 89119 | T: 702 407 7775
F: 702 407 7773 | www.modalight.com | © Copyright 2016


modaLIGHT[®]

SPECIFICATION

MODA E-GRAZE[®] INTERIOR
2700K HCRI 1FT

30° x 100° BEAM ANGLE

Lumens	434.40
Efficacy (120v)	72.40

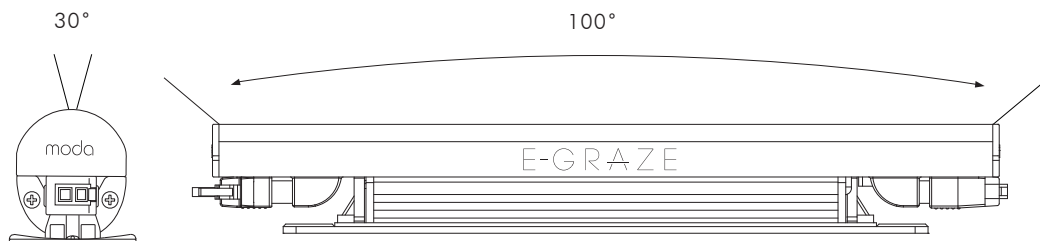


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	40.22 fc	5.8 ft 5.8 ft
4.0 ft	10.05 fc	11.6 ft 11.7 ft
6.0 ft	5.02 fc	17.4 ft 17.5 ft
8.0 ft	2.51 fc	23.3 ft 29.1 ft
10.0 ft	1.25 fc	29.1 ft 29.1 ft
12.0 ft	1.00 fc	34.9 ft 35.0 ft

■ Vert. Spread: 110.90°
■ Horiz. Spread: 111.10°

POLAR CANDELA DISTRIBUTION

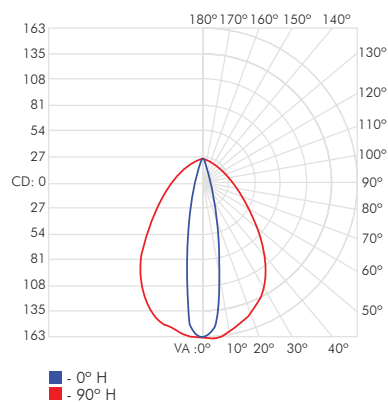

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	119.03	N.A.	27.40%
0-40	194.61	N.A.	44.80%
0-60	342.31	N.A.	78.80%
60-90	76.45	N.A.	17.60%
0-90	424.84	N.A.	97.80%
90-180	9.56	N.A.	2.20%
0-180	434.40	N.A.	100%

LUMENS PER ZONE


Zone	Lumens	% Total
0-10	14.50	3.34%
10-20	41.61	9.58%
20-30	62.99	14.50%
30-40	75.49	17.38%
40-50	78.01	17.96%
50-60	69.50	16.00%
60-70	51.30	11.81%
70-80	25.23	5.81%
80-90	5.95	1.37%
90-100	3.30	0.76%

WIRING

UL / cUL Non-dimming

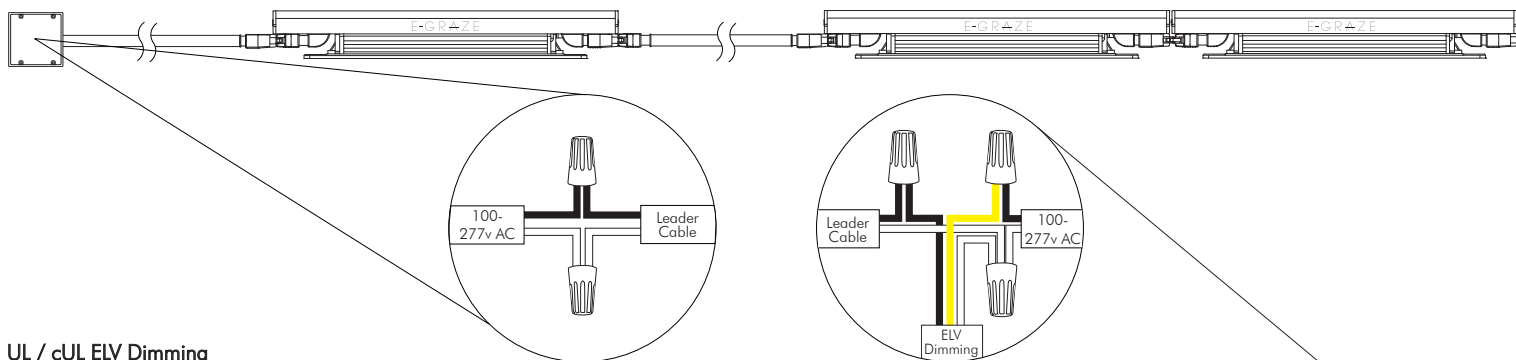

UL / cUL ELV Dimming



WIRING LEGEND

UL/cUL	CE/PSE*
— Live 100-277v	— Live
— Neutral	— Neutral
— Data	*not illustrated

COMPATIBLE DIMMERS

Lutron MAELV-600 (600W)
 Lutron Skylark SELV-300P (300W)
 Leviton MNE04 (400W)
 Lutron DIVA DVELV-300P (300W)
 Lutron DIVA DVELV-300P (300W)
 ADJUSTED

MAX RUN LENGTHS

1ft using 120v AC	100 pcs
1ft using 277v AC	230 pcs

ACCESSORIES



MODA-E-COVE-GRAZE-
INTERIOR-10FT-
LEADER-CABLE

Power to First Fixture of Run

Leader Cable	Male Connector
L: 10' (3.05m)	L: 1 4/5" (45mm)
	W: 3/5" (15mm)
	H: 2/5" (11mm)



MODA-E-COVE-GRAZE-
INTERIOR-25FT-
LEADER-CABLE

Power to First Fixture of Run

Leader Cable:	Male Connector
L: 25' (8m)	L: 1 4/5" (45mm)
	W: 3/5" (15mm)
	H: 2/5" (11mm)



MODA-E-COVE-GRAZE-
INTERIOR-1FT-
JUMPER-CABLE

Connection Between Fixtures

Jumper Cable
L: 1' (305mm)

Male Connector	Female Connector
L: 1 4/5" (45mm)	L: 1 7/10" (43mm)
W: 3/5" (15mm)	W: 7/10" (19mm)
H: 2/5" (11mm)	H: 7/10" (19mm)



MODA-E-COVE-GRAZE-
INTERIOR-4FT-
JUMPER-CABLE

Connection Between Fixtures

Jumper Cable
L: 4' (1.20m)

Male Connector	Female Connector
L: 1 4/5" (45mm)	L: 1 7/10" (43mm)
W: 3/5" (15mm)	W: 7/10" (19mm)
H: 2/5" (11mm)	H: 7/10" (19mm)



MODA-E-COVE-GRAZE-
INTERIOR-TERMINATOR

Must be Fixed to Last Fixture for Safety

L: 1 7/10" (42mm)
W: 3/5" (15mm)
H: 2/5" (11mm)



MODA-BRIDGE¹

Allows User to Convert a 0-10v Dimming Signal into
an ELV Dimming Signal that Dims Down to 0%

L: 7 3/4" (196.85mm)
W: 4 2/10" (107mm)
H: 1 8/10" (47mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE & RoHS Compliant.
Class	1
Environment	Dry Location - IP20
Warranty	5 Year Limited Warranty