

modaLIGHT[®]

SPECIFICATION

MODA GRAZE RS INTERIOR HO 3000K HCRI 1FT

Line Voltage LED Linear Fixture.

High output solid state linear system with integral 100-277v AC power supply. Fully dimmable with 0-10v dimmers. Connect up to 50 feet of product using the quick connect modular connections that come with each fixture. Adjustable mounting bracket allows for easy adjustment when directing the light source. No color over angle, uniform light with no dead spots. Choose your grazing option with a wealth of different optics to choose from.




OUTPUT

Delivered Lumens	1240.08 - 1290.08
CCT & SDMC	3000k - 2 Step MacAdam Ellipse
Chromaticity Coordinates	x: 0.4583 y: 0.4073 u: 0.2516 v: 0.3586
Color Bin Tolerance	Single Bin
Efficacy (lm/w)	88.57 - 92.14
CRI	91
Lumen Maintenance	70,000 Hours L70 @ 25°C 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277v AC 50Hz/60Hz
Power Consumption	14w per ft (0.11A)
Power Factor	≥ 0.85
Dimming	0-10v Dimming Control
Emergency	N/A

CIE 1931 CHROMATICITY DIAGRAM



R VALUES

R1	R2	R3	R4	R5
92	93	93	90	91
R6	R7	R8	R9	R10
91	91	90	93	92
R11	R12	R13	R14	R15
92	91	93	92	91


Project Name:

Notes:


PHYSICAL

Applications	Grazer, Accent & Indirect General Illumination
Dimensions	Length 1' (304mm) Width 1 2/5" (36mm) Height 2" (50.60mm)
Weight	14.4oz (408g)
Construction	Pure Aluminum Body, Polycarbonate Mounting Bracket and Lens
Thermal Management	MODA Aluminum Heat Sink
Optics	6°, 10°, 25°, 40°, 10°x40°, 30°x60°, 30°x60°x5°
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-22°F ~ 122°F (-30°C ~ 70°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing


DIMENSIONS

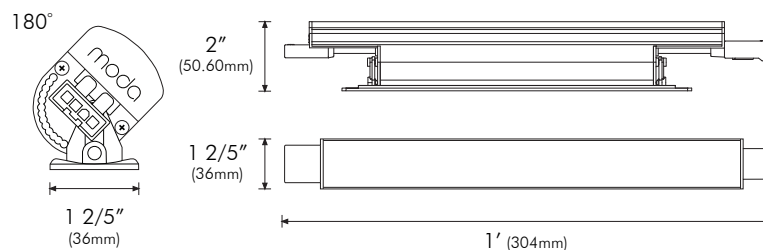

ANGLE ADJUSTMENT

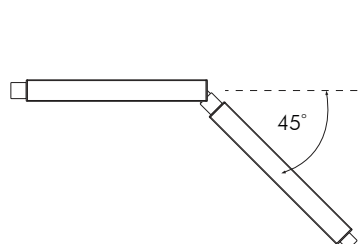

CONNECTOR DIMENSIONS

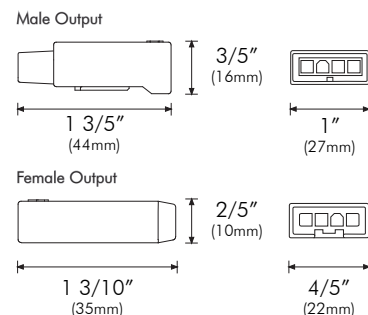

MODA TECHNOLOGY

modaBIN™ modaPHOSPHOR™
modaDRIVER™ modaSOFT™
modaLOCK™ modaKWIK CONNECT™
modaOPTIC™ modaTHERMOPLASTICS™
modaHIGH CRI modaTHERMAL MANAGEMENT™

STANDARDS & CERTIFICATIONS



Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

VDC20162609
955 White Drive Las Vegas, NV 89119 | T: 702 407 7775
F: 702 407 7773 | www.modalight.com | © Copyright 2016


modaLIGHT[®]

SPECIFICATION

MODA GRAZE RS INTERIOR
HO 3000K HCRI 1FT

6° BEAM ANGLE

Lumens	1290.08
Efficacy (lm/w)	92.14

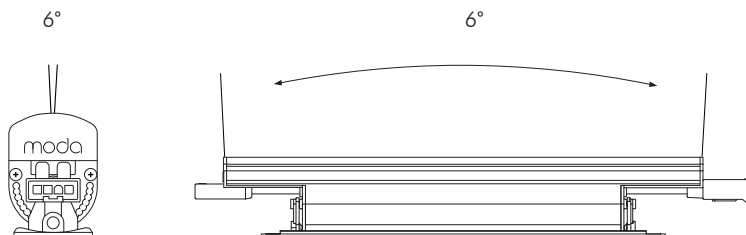


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	119.45 fc	5.7 ft 5.6 ft
4.0 ft	29.86 fc	11.3 ft 11.3 ft
6.0 ft	14.93 fc	17.0 ft 16.9 ft
8.0 ft	7.46 fc	22.7 ft 22.5 ft
10.0 ft	3.73 fc	28.3 ft 28.2 ft
12.0 ft	2.98 fc	34.0 ft 33.8 ft

Vert. Spread: 109.6°
Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION

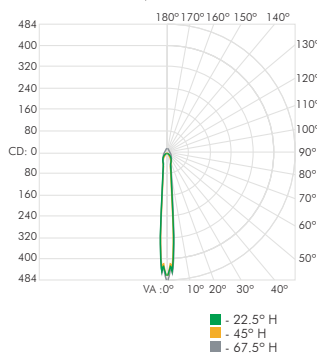

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	1146.88	N.A.	88.90%
0-40	1208.80	N.A.	93.70%
0-60	1265.56	N.A.	98.10%
60-90	21.93	N.A.	1.70%
0-90	1290.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1290.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	599.88	46.50%
10-20	410.24	31.80%
20-30	136.74	10.60%
30-40	60.63	4.70%
40-50	36.12	2.80%
50-60	20.64	1.60%
60-70	14.19	1.10%
70-80	7.74	0.60%
80-90	2.58	0.20%
90-100	0.00	0.00%

10° BEAM ANGLE

Lumens	1278.08
Efficacy (lm/w)	91.29

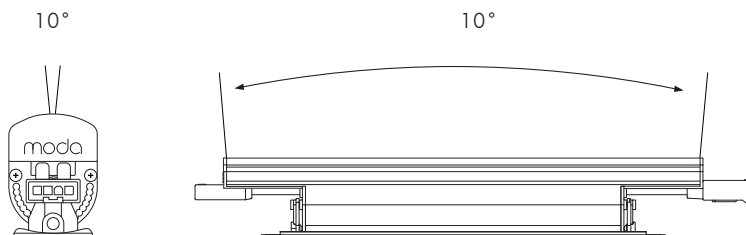


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	118.34 fc	5.7 ft 5.6 ft
4.0 ft	29.58 fc	11.3 ft 11.3 ft
6.0 ft	14.79 fc	17.0 ft 16.9 ft
8.0 ft	7.39 fc	22.7 ft 22.5 ft
10.0 ft	3.69 fc	28.3 ft 28.2 ft
12.0 ft	2.95 fc	34.0 ft 33.8 ft

Vert. Spread: 109.6°
Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION

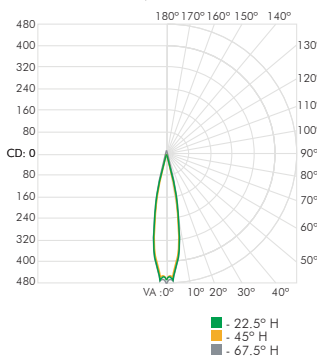

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	1136.21	N.A.	88.90%
0-40	1197.56	N.A.	93.70%
0-60	1253.79	N.A.	98.10%
60-90	21.72	N.A.	1.70%
0-90	1278.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1278.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	594.30	46.50%
10-20	406.42	31.80%
20-30	135.47	10.60%
30-40	60.06	4.70%
40-50	35.78	2.80%
50-60	20.44	1.60%
60-70	14.05	1.10%
70-80	7.66	0.60%
80-90	2.55	0.20%
90-100	0.00	0.00%


modaLIGHT[®]

SPECIFICATION

MODA GRAZE RS INTERIOR
HO 3000K HCRI 1FT

25° BEAM ANGLE

Lumens	1264.08
Efficacy (lm/w)	90.29

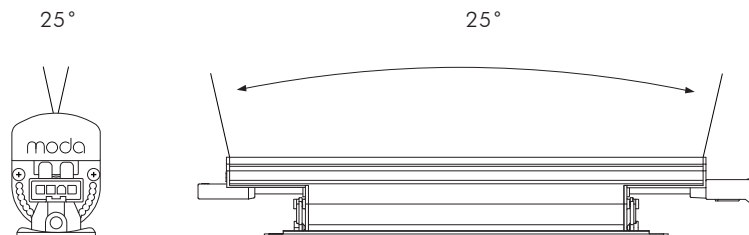


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	117.04 fc	5.7 ft 5.6 ft
4.0 ft	29.26 fc	11.3 ft 11.3 ft
6.0 ft	14.63 fc	17.0 ft 16.9 ft
8.0 ft	7.31 fc	22.7 ft 22.5 ft
10.0 ft	3.65 fc	28.3 ft 28.2 ft
12.0 ft	2.92 fc	34.0 ft 33.8 ft

■ Vert. Spread: 109.6°
■ Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION



ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	1123.76	N.A.	88.90%
0-40	1184.44	N.A.	93.70%
0-60	1240.06	N.A.	98.10%
60-90	21.48	N.A.	1.70%
0-90	1264.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1264.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	587.79	46.50%
10-20	401.97	31.80%
20-30	133.99	10.60%
30-40	59.41	4.70%
40-50	35.39	2.80%
50-60	20.22	1.60%
60-70	13.90	1.10%
70-80	7.58	0.60%
80-90	2.52	0.20%
90-100	0.00	0.00%

40° BEAM ANGLE

Lumens	1254.08
Efficacy (lm/w)	89.57

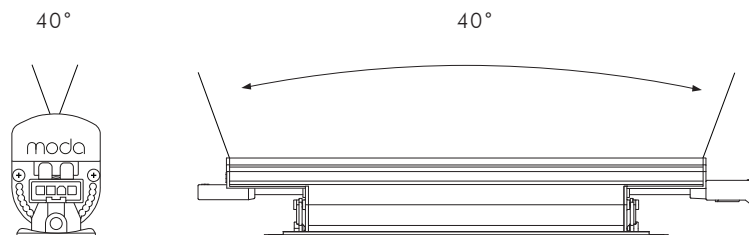


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	116.11 fc	5.7 ft 5.6 ft
4.0 ft	29.02 fc	11.3 ft 11.3 ft
6.0 ft	14.51 fc	17.0 ft 16.9 ft
8.0 ft	7.25 fc	22.7 ft 22.5 ft
10.0 ft	3.62 fc	28.3 ft 28.2 ft
12.0 ft	2.90 fc	34.0 ft 33.8 ft

■ Vert. Spread: 109.6°
■ Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION



ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	1114.87	N.A.	88.90%
0-40	1175.07	N.A.	93.70%
0-60	1230.25	N.A.	98.10%
60-90	21.31	N.A.	1.70%
0-90	1254.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1254.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	583.14	46.50%
10-20	398.79	31.80%
20-30	132.93	10.60%
30-40	58.94	4.70%
40-50	35.11	2.80%
50-60	20.06	1.60%
60-70	13.79	1.10%
70-80	7.52	0.60%
80-90	2.50	0.20%
90-100	0.00	0.00%


modaLIGHT[®]

SPECIFICATION

MODA GRAZE RS INTERIOR
HO 3000K HCRI 1FT

10° x 40° BEAM ANGLE

Lumens	1245.08
Efficacy (lm/w)	88.93

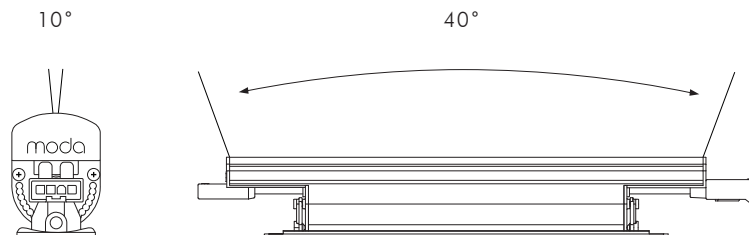


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	115.28 fc	5.7 ft 5.6 ft
4.0 ft	28.82 fc	11.3 ft 11.3 ft
6.0 ft	14.41 fc	17.0 ft 16.9 ft
8.0 ft	7.20 fc	22.7 ft 22.5 ft
10.0 ft	3.60 fc	28.3 ft 28.2 ft
12.0 ft	2.88 fc	34.0 ft 33.8 ft

■ Vert. Spread: 109.6°
■ Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION

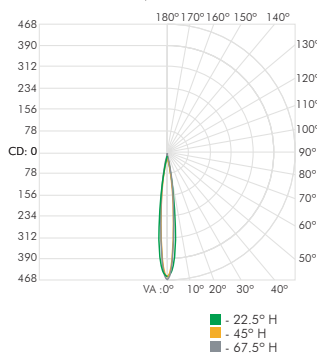

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	1106.87	N.A.	88.90%
0-40	1166.63	N.A.	93.70%
0-60	1221.42	N.A.	98.10%
60-90	21.16	N.A.	1.70%
0-90	1245.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1245.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	578.96	46.50%
10-20	395.93	31.80%
20-30	131.97	10.60%
30-40	58.51	4.70%
40-50	34.86	2.80%
50-60	19.92	1.60%
60-70	13.69	1.10%
70-80	7.47	0.60%
80-90	2.49	0.20%
90-100	0.00	0.00%

30° x 60° BEAM ANGLE

Lumens	1242.08
Efficacy (lm/w)	88.72

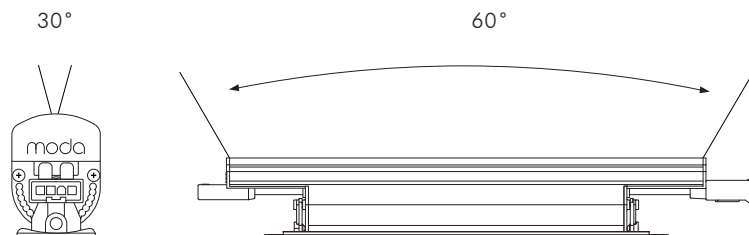


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	115.00 fc	5.7 ft 5.6 ft
4.0 ft	28.75 fc	11.3 ft 11.3 ft
6.0 ft	14.37 fc	17.0 ft 16.9 ft
8.0 ft	7.18 fc	22.7 ft 22.5 ft
10.0 ft	3.59 fc	28.3 ft 28.2 ft
12.0 ft	2.87 fc	34.0 ft 33.8 ft

■ Vert. Spread: 109.6°
■ Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION

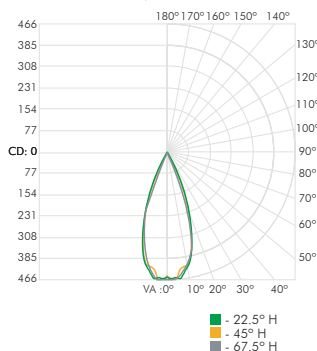

ZONAL LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0-30	1104.20	N.A.	88.90%
0-40	1163.82	N.A.	93.70%
0-60	1218.48	N.A.	98.10%
60-90	21.11	N.A.	1.70%
0-90	1242.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1242.08	N.A.	100.00%

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	577.56	46.50%
10-20	394.98	31.80%
20-30	131.66	10.60%
30-40	58.37	4.70%
40-50	34.77	2.80%
50-60	19.87	1.60%
60-70	13.66	1.10%
70-80	7.45	0.60%
80-90	2.48	0.20%
90-100	0.00	0.00%


modaLIGHT[®]

SPECIFICATION

MODA GRAZE RS INTERIOR
HO 3000K HCRI 1FT

30° x 60° x 5° BEAM ANGLE

Lumens	1240.08
Efficacy (lm/w)	88.57

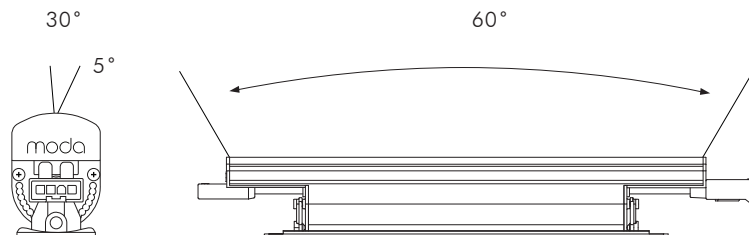


ILLUMINANCE AT A DISTANCE

	Center Beam FC	Beam Width
2.0 ft	114.82 fc	5.7 ft 5.6 ft
4.0 ft	28.70 fc	11.3 ft 11.3 ft
6.0 ft	14.35 fc	17.0 ft 16.9 ft
8.0 ft	7.17 fc	22.7 ft 22.5 ft
10.0 ft	3.58 fc	28.3 ft 28.2 ft
12.0 ft	2.87 fc	34.0 ft 33.8 ft

Vert. Spread: 109.6°
Horiz. Spread: 109.3°

POLAR CANDELA DISTRIBUTION

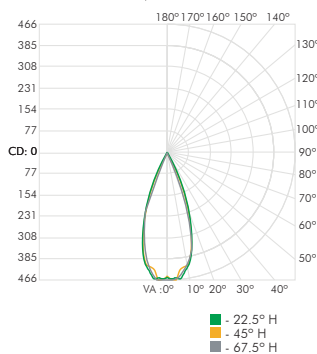

ZONAL LUMEN SUMMARY


Zone	Lumens	% Lamp	% Fixt
0-30	1102.43	N.A.	88.90%
0-40	1161.95	N.A.	93.70%
0-60	1216.51	N.A.	98.10%
60-90	21.08	N.A.	1.70%
0-90	1240.08	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	1240.08	N.A.	100.00%

LUMENS PER ZONE


Zone	Lumens	% Total
0-10	576.63	46.50%
10-20	394.34	31.80%
20-30	131.44	10.60%
30-40	58.28	4.70%
40-50	34.72	2.80%
50-60	19.84	1.60%
60-70	13.64	1.10%
70-80	7.44	0.60%
80-90	2.48	0.20%
90-100	0.00	0.00%

WIRING

UL / cUL Non-dimming



0-10v Dimming



WIRING LEGEND

UL / cUL	0-10v	CE/PSE*
Ground	Ground	Ground
Live 100-277v	Live 100-277v	Live 100-277v
Neutral	Neutral	Neutral
Data	Data	Data

MAX RUN LENGTHS

1ft using 120v AC	50 pcs
1ft using 277v AC	50 pcs

*not illustrated

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

VDC20162609
955 White Drive Las Vegas, NV 89119 | T: 702 407 7775
F: 702 407 7773 | www.modalight.com | © Copyright 2016

ACCESSORIES



MODA-COVE-GRAZE-RS
LEADER-CABLE

Power to First Fixture of Run

Leader Cable	Connector
L: 10' (3.05m)	L: 1 2/5" (35mm)
	W: 1 1/10" (27mm)
	H: 2/5" (10mm)



MODA-COVE-GRAZE-RS
JUMPER-CABLE

Connection Between Fixtures

Jumper Cable:	Connector
L: 1' (305mm)	L: 1 7/10" (43mm)
	W: 1 1/10" (27mm)
	H: 3/5" (15mm)



MODA-COVE-GRAZE-RS
END-CAP

Must be Fixed to Last Fixture for Safety

L: 1 7/10" (43mm)
W: 1 1/10" (27mm)
H: 3/5" (15mm)

STANDARDS & CERTIFICATIONS

Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377-2015, CE & RoHS Compliant.
Class	1
Environment	Dry Location- IP20
Warranty	5 Year Limited Warranty

modaLIGHT[®]

SPECIFICATION

SKU GUIDE: MODA-A-B-C-D-E-F-G-H-I

MODA - GRAZE-RS - INTERIOR - _____ - S1 - S - _____ - HCRI-1FT- _____

COMPLETE SAMPLE SKU: MODA-GRAZE-RS-INT-HO-S1-S-3K-HCRI-1FT-6

A - FIXTURE

GRAZE-RS — Fixture with options

F - LED COLOR

27K — 2700K
3K — 3000K
4K — 4000K

B - LOCATION

INT — Fixture for dry location use

G - COLOR RENDERING INDEX (CRI)

HCRI — High CRI

C - LIGHT OUTPUT

SO — Standard Output
HO — High Output

H - LENGTH

1FT — 1 foot

D - SERIES NUMBER

S1 — Series 1

E - PRODUCT FINISH

S — Silver

I - OPTICS

6 — 6° 140 — 10° x 40°
10 — 10° 360 — 30° x 60°
25 — 25° 365 — 30° x 60° x 5°
40 — 40°