

MODA NANO[®] COVE 1FT

INPUT VOLTAGE: 120V AC, 60Hz

OUTPUT VOLTAGE: 129.9 DC(at non-dimming)

OUTPUT CURRENT: 1.72 mA(at non-dimming)

Electronic Low Voltage Reverse Phase Trailing Edge

Dimmer	Position	Output Voltage (V)	Output Current (mA)	LED Power (W)	Current Ratio (%)	LED Power Ratio (%)
Lutron Nova INTELV-600	100%	129.9	1.62	2.11	94.31%	94.31%
	50%	126.2	0.78	0.98	45.31%	44.02%
	0%	117.1	0.01	0.01	0.39%	0.35%
Legrand WattStopper	100%	129.9	1.70	2.21	98.78%	98.78%
	50%	127.2	1.08	1.38	63.00%	61.69%
	0%	117.9	0.01	0.01	0.39%	0.35%
Crestron Cameo E-CLW- DELVEX-P	100%	129.8	1.70	2.21	98.78%	98.70%
	50%	127.5	1.15	1.47	66.89%	65.65%
	0%	117.8	0.01	0.01	0.39%	0.35%
Lutron Maestro MAELV-600	100%	129.7	1.70	2.21	98.87%	98.70%
	50%	125.9	0.67	0.85	39.08%	37.88%
	0%	116.8	0.01	0.01	0.39%	0.35%
Lutron Diva DVELV-300P	100%	129.9	1.68	2.18	97.42%	97.42%
	50%	128.2	1.08	1.38	62.61%	61.79%
	0%	117.1	0.01	0.01	0.39%	0.35%
Leviton Decora DSE06-10Z	100%	129.8	1.70	2.21	98.78%	98.70%
	50%	127.1	0.84	1.07	48.81%	47.75%
	0%	117.1	0.01	0.01	0.39%	0.35%
Decora Monet MNE04	100%	129.9	1.66	2.16	96.64%	96.64%
	50%	128.4	1.20	1.54	69.61%	68.81%
	0%	116	0.01	0.01	0.39%	0.34%
Crestron Cameo CLW-DELVEX- PAS	100%	129.9	1.70	2.20	98.58%	98.58%
	50%	127.8	1.16	1.48	67.28%	66.19%
	0%	112.2	0.01	0.01	0.39%	0.34%
EchoFlex ER6CD-AU-120	100%	129.9	1.70	2.21	98.97%	98.97%
	50%	126.7	0.90	1.14	52.50%	51.21%
	0%	117.2	0.01	0.01	0.58%	0.53%

MODA NANO[®] COVE 1FT

INPUT VOLTAGE: 120V AC, 60Hz

OUTPUT VOLTAGE: 129.9 DC(at non-dimming)




OUTPUT CURRENT: 1.72 mA(at non-dimming)

Electronic Low Voltage Reverse Phase Trailing Edge

Dimmer	Position	Output Voltage (V)	Output Current (mA)	LED Power (W)	Current Ratio (%)	LED Power Ratio (%)
Lutron Skylark SELV-300P	100%	129.9	1.67	2.16	96.83%	96.83%
	50%	127.7	0.97	1.23	56.20%	55.24%
	0%	112.8	0.01	0.01	0.39%	0.34%
Lutron SELV-300p with PHPM-DV-WH	100%	129.9	1.71	2.22	99.56%	99.56%
	50%	128.5	1.33	1.71	77.58%	76.75%
	0%	111.9	0.01	0.01	0.39%	0.34%
Grafik Eye QS with PHPM-DV-WH	100%	129.9	1.71	2.22	99.56%	99.56%
	50%	127	0.82	1.04	47.44%	46.39%
	0%	112.2	0.01	0.01	0.39%	0.34%
Grafik Eye QS with ELVi-1000	100%	129.9	1.71	2.22	99.56%	99.56%
	50%	126.2	0.64	0.81	37.33%	36.27%
	0%	114.8	0.01	0.01	0.58%	0.52%
MODA Bridge 2.0	100%	129.9	1.71	2.22	99.56%	99.56%
	50%	127.2	0.91	1.16	53.08%	51.98%
	0%	111.9	0.01	0.01	0.39%	0.34%

MODA NANO[®] COVE 1FT

Electronic Low Voltage Reverse Phase Trailing Edge

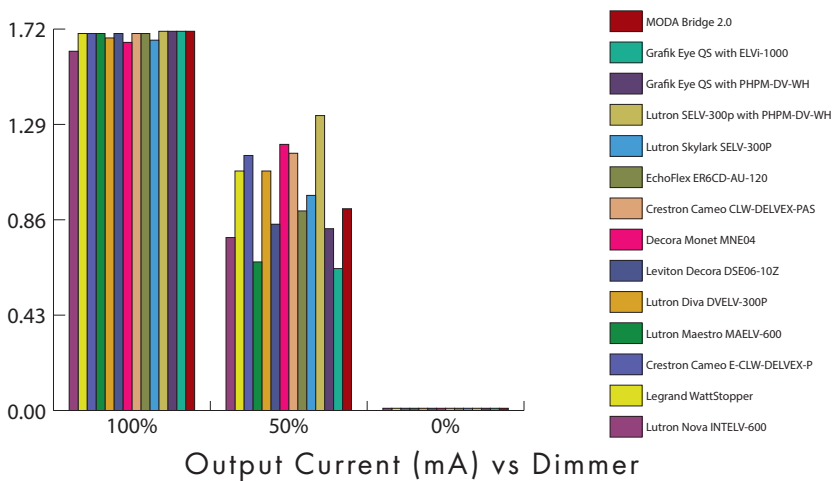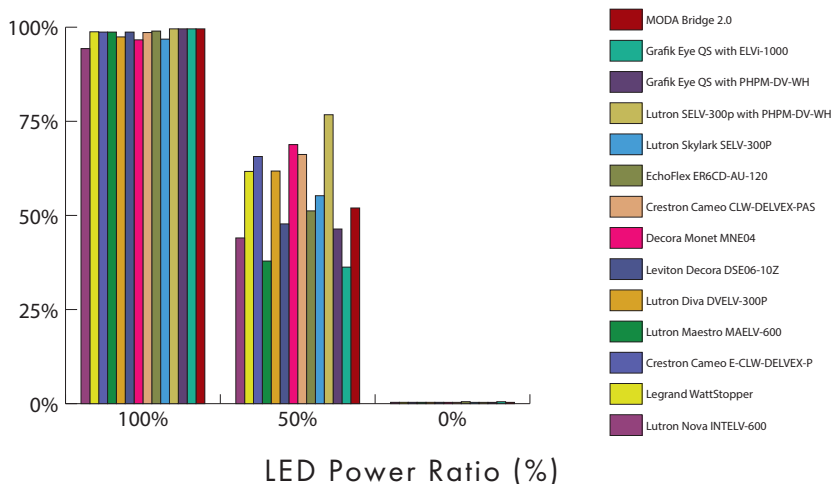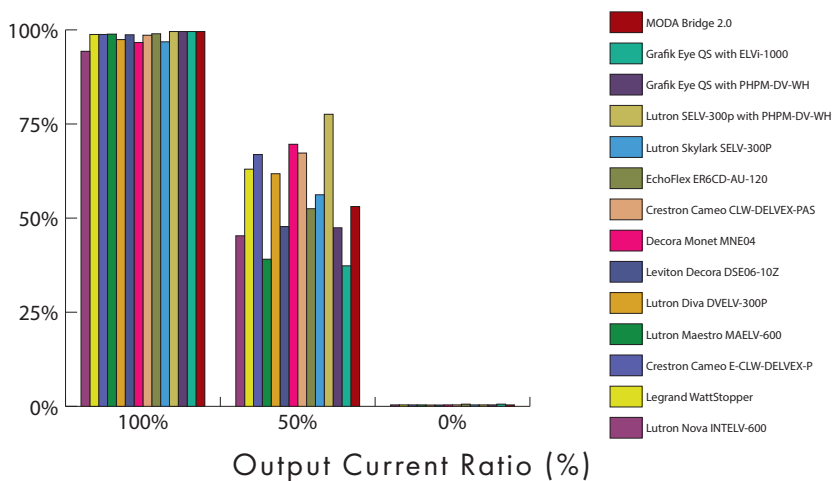

MODA NANO[®] COVE 4FT

INPUT VOLTAGE: 120V AC, 60Hz

OUTPUT VOLTAGE: 129.4 DC(at non-dimming)

OUTPUT CURRENT: 6.44 mA(at non-dimming)

Electronic Low Voltage Reverse Phase Trailing Edge

Dimmer	Position	Output Voltage (V)	Output Current (mA)	LED Power (W)	Current Ratio (%)	LED Power Ratio (%)
Lutron Nova INTELV-600	100%	128.5	6.16	7.91	95.60%	94.93%
	50%	126.2	2.81	3.55	43.71%	42.63%
	0%	112.1	0.02	0.02	0.26%	0.22%
Legrand WattStopper	100%	129.5	6.39	8.27	99.17%	99.25%
	50%	128.2	4.81	6.17	74.76%	74.07%
	0%	117.9	0.04	0.05	0.64%	0.58%
Crestron Cameo E-CLW- DELVEX-P	100%	129.3	6.38	8.25	99.05%	98.97%
	50%	127.3	3.97	5.05	61.60%	60.60%
	0%	112.4	0.02	0.03	0.38%	0.33%
Lutron Maestro MAELV-600	100%	129.4	6.42	8.31	99.69%	99.69%
	50%	125.6	2.30	2.89	35.78%	34.73%
	0%	114.5	0.02	0.02	0.26%	0.23%
Lutron Diva DVELV-300P	100%	129.3	6.26	8.09	97.13%	97.05%
	50%	127.5	4.21	5.36	65.31%	64.35%
	0%	111.5	0.02	0.02	0.26%	0.22%
Leviton Decora DSE06-10Z	100%	129.4	6.37	8.24	98.92%	98.92%
	50%	126.4	2.92	3.69	45.37%	44.32%
	0%	115.6	0.02	0.02	0.26%	0.23%
Decora Monet MNE04	100%	129.2	6.24	8.06	96.87%	96.72%
	50%	127.3	4.11	5.23	63.77%	62.74%
	0%	116.1	0.02	0.03	0.38%	0.34%
Crestron Cameo CLW-DELVEX- PAS	100%	129.3	6.35	8.20	98.54%	98.46%
	50%	126.8	3.42	4.33	53.04%	51.97%
	0%	125.8	0.02	0.03	0.38%	0.34%
EchoFlex ER6CD-AU-120	100%	129.4	6.37	8.24	98.92%	98.92%
	50%	126.5	3.30	4.18	51.25%	50.10%
	0%	117.4	0.04	0.05	0.64%	0.58%

MODA NANO[®] COVE 4FT

INPUT VOLTAGE: 120V AC, 60Hz

OUTPUT VOLTAGE: 129.4 DC(at non-dimming)




OUTPUT CURRENT: 6.44 mA(at non-dimming)

Electronic Low Voltage Reverse Phase Trailing Edge

Dimmer	Position	Output Voltage (V)	Output Current (mA)	LED Power (W)	Current Ratio (%)	LED Power Ratio (%)
Lutron Skylark SELV-300P	100%	129.1	6.12	7.91	95.08%	94.86%
	50%	127.1	3.82	4.85	59.30%	58.25%
	0%	113.1	0.02	0.02	0.26%	0.22%
Lutron SELV-300p with PHPM-DV-WH	100%	129.3	6.37	8.24	98.92%	98.84%
	50%	128.3	5.16	6.62	80.13%	79.45%
	0%	117.2	0.02	0.03	0.38%	0.35%
Grafik Eye QS with PHPM-DV-WH	100%	129.4	6.37	8.24	98.92%	98.92%
	50%	126.2	2.99	3.77	46.39%	45.24%
	0%	111.9	0.02	0.02	0.26%	0.22%
Grafik Eye QS with ELVi-1000	100%	129.4	6.37	8.24	98.92%	98.92%
	50%	125.5	2.3	2.89	35.78%	34.71%
	0%	114.4	0.02	0.03	0.38%	0.34%
MODA Bridge 2.0	100%	129.5	6.37	8.25	98.92%	99.00%
	50%	126.8	3.40	4.31	52.78%	51.72%
	0%	113.1	0.02	0.02	0.26%	0.22%

MODA NANO[®] COVE 4FT

Electronic Low Voltage Reverse Phase Trailing Edge

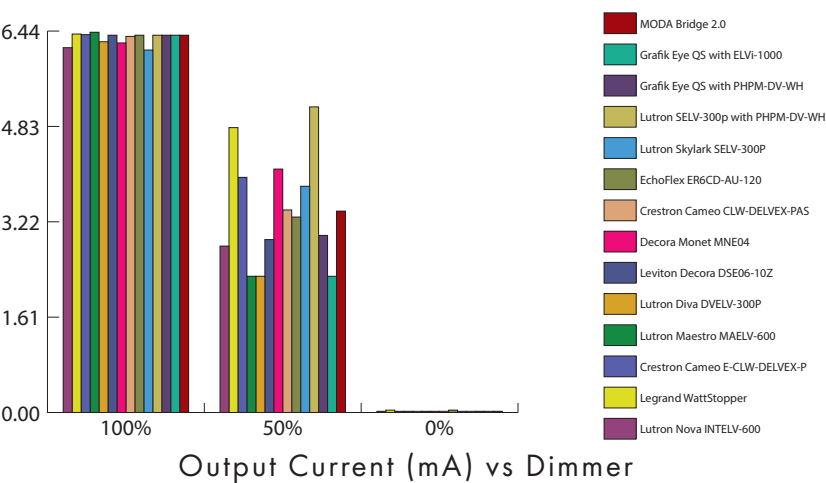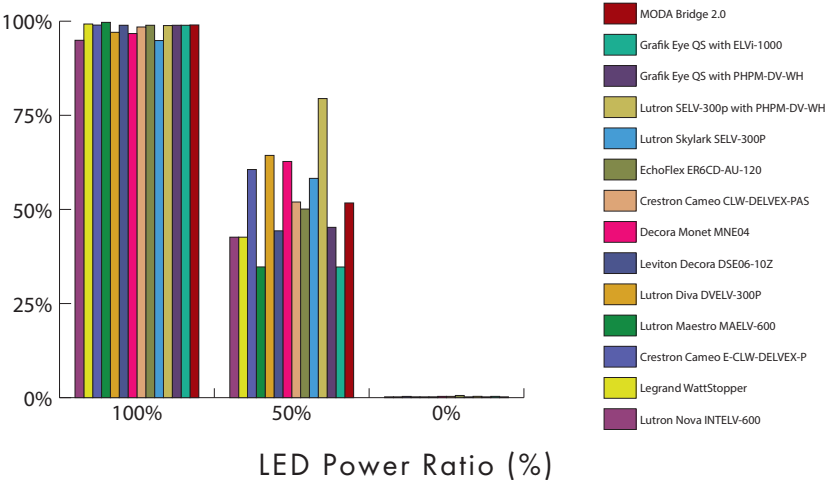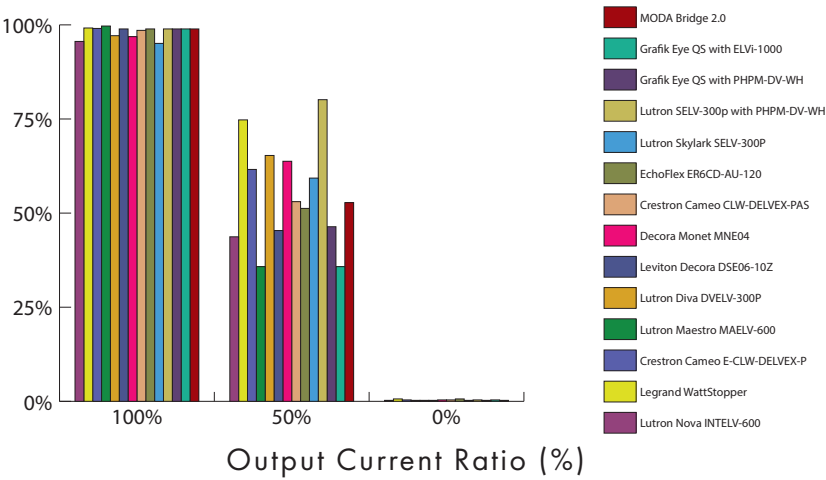

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.