


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

SKU: _____ Type: _____ PO #: _____ Quantity: _____

Notes: _____

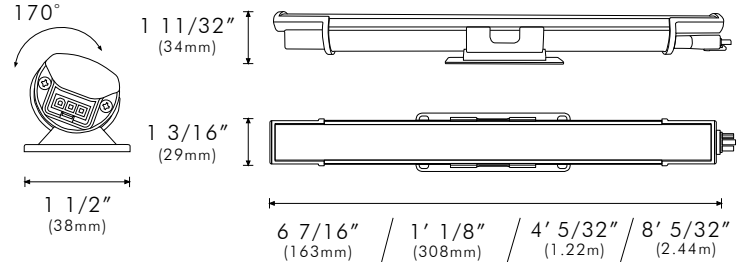

PHYSICAL

Dimensions	L: 6 7/16in(163mm) L: 1ft 1/8in (308mm) W: 1 3/16in(29mm) L: 4ft 5/32in(1.22m) H: 1 1/2in(38mm) L: 8ft 5/32in (2.44m)	
Weight	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg)/ 4ft: 1.22 lbs (0.55 kg)/ 8ft: 2.61 lbs (1.18kg)	
Applications	Graze, Accent, & Indirect General Illumination	
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens	
Ingress Protection	Dry/Damp Location IP52	
Thermal Management	Moda Aluminum Heat Sink	
Fixture Connections	Integral Male & Female Connectors	
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)	
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)	
Humidity	20-70% Non Condensing	

POWER CONSUMPTION

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
6 Inch	2.8W / N/A	3.8W / N/A	4.2W / N/A
1 Foot	5W / 9.7W	5.9W / 10.1W	6.5W / 10.3W
4 Foot	18.3W / 36W	18.8W / 37.1W	19.2W / 38.2W
8 Foot	36W / 75W	37W / 76.4W	38.1W / 77.1W

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

OUTPUT

CCTs	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle	30° x 100°
CRI	95 - 98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

SPECIFICATIONS

	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
6IN SO ELV	132 - 315	47 - 113	29 - 70	29 - 70
1FT SO ELV	263 - 651	52 - 130	44 - 110	40 - 100
1FT HO ELV	526 - 1253	54 - 129	52 - 124	51 - 121
4FT SO ELV	1052 - 2505	57 - 136	55 - 133	54 - 130
4FT HO ELV	2104 - 5010	58 - 139	56 - 135	55 - 131
8FT SO ELV	2104 - 5208	58 - 144	56 - 140	55 - 136
8FT HO ELV	4208 - 10024	56 - 133	55 - 131	54 - 130

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
SO	120 ft	240 ft	240 ft
HO	50 ft	100 ft	100 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

FIXTURE		SKU
ELV SO 6IN	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN 30X100	130-0001
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN 30X100	130-0003
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN 30X100	130-0005
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN 30X100	130-0006
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN 30X100	130-0008
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN 30X100	130-0009
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN 30X100	130-0014
ELV SO 1FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT 30X100	130-1001
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT 30X100	130-1003
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT 30X100	130-1005
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT 30X100	130-1006
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT 30X100	130-1008
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT 30X100	130-1009
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT 30X100	130-1014
ELV HO 1FT	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 1FT 30X100	130-1201
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 1FT 30X100	130-1203
	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 1FT 30X100	130-1205
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 1FT 30X100	130-1206
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 1FT 30X100	130-1208
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 1FT 30X100	130-1209
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 1FT 30X100	130-1214
ELV SO 4FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT 30X100	130-3001
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT 30X100	130-3003
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT 30X100	130-3005
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT 30X100	130-3006
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT 30X100	130-3008
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT 30X100	130-3009
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT 30X100	130-3014
ELV HO 4FT	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 4FT 30X100	130-3201
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 4FT 30X100	130-3203
	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 4FT 30X100	130-3205
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 4FT 30X100	130-3206
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 4FT 30X100	130-3208
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 4FT 30X100	130-3209
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 4FT 30X100	130-3214
ELV SO 8FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 8FT 30X100	130-5001
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 8FT 30X100	130-5003
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 8FT 30X100	130-5005
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 8FT 30X100	130-5006
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 8FT 30X100	130-5008
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 8FT 30X100	130-5009
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 8FT 30X100	130-5014

FIXTURE		SKU
ELV HO 8FT	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 8FT 30X100	130-5201
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 8FT 30X100	130-5203
	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 8FT 30X100	130-5205
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 8FT 30X100	130-5206
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 8FT 30X100	130-5208
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 8FT 30X100	130-5209
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 8FT 30X100	130-5214

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 3 Pin 10ft	Power to first fixture of run	299-0000
Leader Cable US 3 Pin 25ft	Power to first fixture of run	299-0002
Jumper Cable US 3 Pin 1ft	Connection between fixtures	299-1000
Jumper Cable US 3 Pin 4ft	Connection between fixtures	299-1002
Leader Cable EU 3 Pin 3m	Power to first fixture of run	299-0001
Leader Cable EU 3 Pin 10m	Power to first fixture of run	299-0003
Jumper Cable EU 3 Pin 300mm	Connection between fixtures	299-1001
Jumper Cable EU 3 Pin 1m	Connection between fixtures	299-1003
Terminator 3 Pin	Must be fixed to last fixture for safety	299-2000
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	299-3200

NAME	DESCRIPTION	SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	250-0000