

K • STK

*Energy efficient total
building heating solutions*

Solaronics

K-SERIES


HIGH INTENSITY HEATERS

APPLICATIONS:

- Golf Driving Ranges
- Car Washes
- Manufacturing Plants
- Loading Docks
- Auto Dealerships
- Firehouses
- Airplane Hangars
- Ice Rinks
- Tennis Courts
- Warehouses



FEATURES:

- Available in single stage 'K' and 2-stage 'STK'
- Available inputs of 30,000 to 200,000 BTU/H
- Operates on Natural or Propane gas
- 115V, 24V, and Millivolt control packages available
- Corrosion-free aluminized steel main frame
- No direct venting required
- Instant heat on demand: Reaches maximum operating temperature in less than one minute
- Fuel savings of 40% to 75% over conventional warm air systems
- Polished aluminum reflectors
- Factory prewired, prepiped, and tested
- CSA International Design Certified

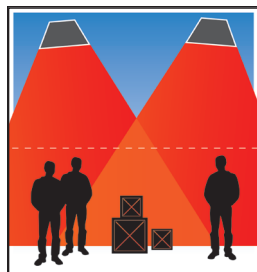

PRIMARY
HEATING
ZONE

Solaronics High Intensity Heaters provide energy efficient total building heating solutions.

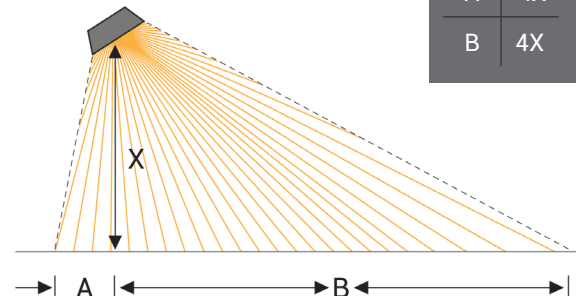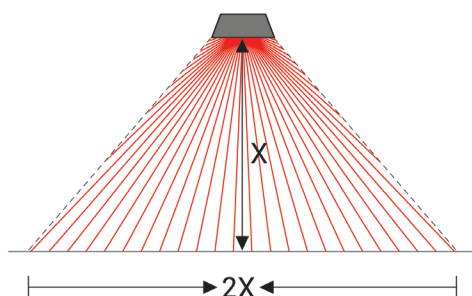

A	$\frac{1}{4}X$
B	$4X$


OPTIONS:

- Protective Screens
- Parabolic Reflector Extensions
- Heat Shields for Reduced Clearances
- Secondary Radiating Grids
- Gas Connectors
- Thermostats
- Chain Hanging Kits

WARRANTY:

Limited one-year warranty
Limited lifetime warranty on ceramic burner head also available.

K-SERIES HIGH INTENSITY HEATERS

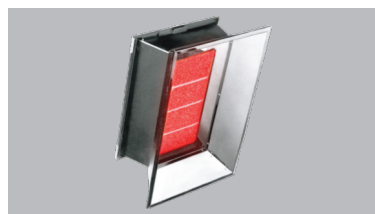

30,000-60,000 BTUH

MODEL	MBTUH NAT	MBTUH LP
K-30	30	
K-35	35	35
K-40	40	
K-45	45	
K-50	50	50
K-55	55	
K-60	60	


Note: Width or Length of K-30 through K-60 models can be parallel to floor.

CLEARANCES TO COMBUSTIBLES

Side of Heater	30"
Back of Heater	30"
Top of Heater:	
Mounted 0° - 29°	60"
Mounted 30° only	48"
w/ Heat Shield 0° - 30°	34"
Below Heater:	
Standard Reflector	80"
Parabolic Reflector	110"

OVERALL DIMENSIONS

Length	16¾"
Width (w/controls)	28⅝"
Depth	8¾"
Radiating Surface	173 sq."
Shipping Weight	30 lbs.

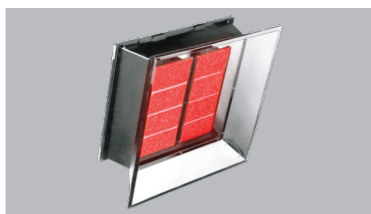

70,000-100,000 BTUH

MODEL	MBTUH NAT	MBTUH LP
K-70	70	70
K-75	75	75
K-80	80	80
K-85	85	85
K-90	90	90
STK-90/45		90/45
K-95	95	
K-100	100	
STK-100/50	100/50	


CLEARANCES TO COMBUSTIBLES

Side of Heater	36"
Back of Heater	30"
Top of Heater:	
Mounted 0° - 29°	62"
Mounted 30° only	50"
w/ Heat Shield 0° - 30°	38"
Below Heater:	
Standard Reflector	105"
Parabolic Reflector	135"

OVERALL DIMENSIONS

Length	25¼"
Width (w/controls)	28⅝"
Depth	8¾"
Radiating Surface	346 sq."
Shipping Weight	(K) 36 lbs.

(STK) 36 lbs.

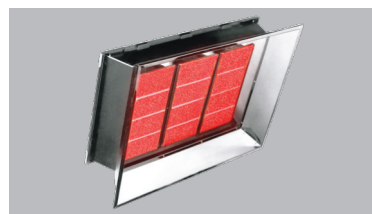

110,000-160,000 BTUH

MODEL	MBTUH NAT	MBTUH LP
K-110	110	
K-120	120	120
STK-120/80		120/80
K-125	125	
K-130	130	
K-135	135	
K-150	150	
STK-150/100	150/100	
K-160	160	


CLEARANCES TO COMBUSTIBLES

Side of Heater	46"
Back of Heater	33"
Top of Heater:	
Mounted 0° - 29°	64"
Mounted 30° only	58"/
w/ Heat Shield 0° - 30°	N.A.
Below Heater:	
Standard Reflector	125"
Parabolic Reflector	165"

OVERALL DIMENSIONS

Length	33⅞"
Width (w/controls)	28⅝"
Depth	8¾"
Radiating Surface	519 sq."
Shipping Weight	(K) 49 lbs.

(STK) 49 lbs.

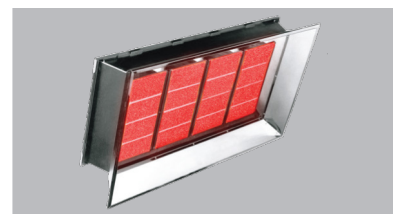

160,000-200,000 BTUH

MODEL	MBTUH NAT	MBTUH LP
K-160		160
STK-160/80		160/80
K-175	175	
K-200	200	
STK-200/100	200/100	

CLEARANCES TO COMBUSTIBLES

Side of Heater	48"
Back of Heater	33"
Top of Heater:	
Mounted 0° - 29°	68"
Mounted 30° only	68"
w/ Heat Shield 0° - 30°	N.A.
Below Heater:	
Standard Reflector	140"
Parabolic Reflector	180"

OVERALL DIMENSIONS

Length	42½"
Width (w/controls)	28⅝"
Depth	8¾"
Radiating Surface	692 sq."
Shipping Weight	(K) 62 lbs.

(STK) 62 lbs.

CONTROL OPTIONS

CONTROL SUFFIX	GAS	IGNITION	SHUT-OFF	VOLTAGE*	MAX. POWER CONSUMPTION	PILOT
STN	Natural	Direct Spark	100%	24 Volt	23 Volt Amps	None
STL	Propane	Direct Spark	100%	24 Volt	23 Volt Amps	None
TAN	Natural	Manual	100%	Millivolt	None	Constant
TAL	LP	Manual	100%	Millivolt	None	Constant
DSAN	Natural	Direct Spark	100%	115 Volt	17 Volt Amps	None
DSAL	LP	Direct Spark	100%	115 Volt	17 Volt Amps	None
QSAN	Natural	Direct Spark	100%	24 Volt	16 Volt Amps	None
QSAL	LP	Direct Spark	100%	24 Volt	16 Volt Amps	None

NOTE: RED BLOCKS INDICATE 2 STAGE MODELS

SYSTEM INFORMATION

Manifold Operating Pressure

Nat. Gas: 6" WC LP Gas: 10" WC

Minimum Inlet Pressure

Nat. Gas: 7" WC LP Gas: 11" WC

Maximum Inlet Pressure

Nat. Gas: 14" WC LP Gas: 14" WC

Gas Inlet Connection 1/2" FPT

Solaronics

3720 Lapeer Road | Auburn Hills, MI 48326
800.223.5335 | FAX: 248.651.0357
Solaronicsusa.com



DISTRIBUTOR INFORMATION