

Assessing the potential of Jacobian-free Newton-Krylov methods for cell-centred finite volume solid mechanics

Philip Cardiff^{1,2,3*}, Ivan Batistić⁴ and Željko Tuković⁴

¹*School of Mechanical and Materials Engineering, University College Dublin, Ireland.

²UCD Centre for Mechanics, University College Dublin, Ireland.

³SFI I-Form Centre, University College Dublin, Ireland.

⁴Faculty of Mechanical Engineering and Naval Architecture, University of Zagreb, Croatia.

*Corresponding author. E-mail: philip.cardiff@ucd.ie

Abstract

In this study, we explore the efficacy of Jacobian-free Newton-Krylov methods within the context of finite-volume solid mechanics. Traditional Newton-based approaches to solving nonlinear systems typically require explicit formation and storage of the Jacobian matrix, which can be computationally expensive and memory-intensive. The Jacobian-free Newton-Krylov method circumvents this by employing Krylov subspace iterative solvers, such as GMRES, in conjunction with a Newton iteration scheme that approximates the action of the Jacobian through finite difference evaluations. A further potential advantage of the Jacobian-free Newton-Krylov method is that it is readily applicable to existing segregated finite volume frameworks, where forming and storing the exact Jacobian would require major code refactoring. This article research systematically evaluates the performance of Jacobian-free Newton-Krylov methods by benchmarking them against conventional segregated methods on a suite of benchmark cases of varying geometric dimension, geometric nonlinearity, dynamic response, and material behaviour. Key metrics such as computational cost, memory and robustness are analysed. Additionally, we investigate the impact of various solution algorithm choices, such as preconditioning strategy, on the efficiency of the Jacobian-free Newton-Krylov method. Our findings indicate that Jacobian-free Newton-Krylov methods can achieve comparable/superior/XXX convergence behaviour relative to traditional segregated methods, particularly in cases where YYYY. Summarise key findings: time, memory, important choices, JFNK vs SEG vs FE, ... The results suggest that Jacobian-free Newton-Krylov methods are promising for advancing finite-volume solid mechanics simulations and are particularly attractive for existing segregated frameworks where minimal code changes would be required to exploit openly available Jacobian-free Newton-Krylov implementations. The described implementations are made publicly available in the solids4foam toolbox for OpenFOAM, allowing the community to examine, extend and compare the procedures with the our codes.

1 Introduction

Finite volume formulations for solid mechanics are heavily influenced by their fluid mechanics counterparts, favouring segregated implicit and fully explicit methods. Segregated approaches, where the governing momentum equation is temporarily decomposed into scalar component equations, offer memory efficiency and simplicity of implementation, but the outer coupling Picard iterations often suffer from slow convergence. Explicit formulations are straightforward to implement and offer superior robustness but are only efficient for high-speed dynamics, where the physics requires small time increments. In contrast, the finite element community commonly employs Newton-Raphson-type solution algorithms, which necessitate repeated assembly of the Jacobian matrix and solution of the resulting block-coupled non-diagonally dominant linear system. A disadvantage of traditional Newton-based approaches is that they typically require explicit formation and storage of the Jacobian matrix, which can be computationally expensive and memory-intensive. A further disadvantage from a finite volume perspective is that extending existing code frameworks from segregated algorithms to a coupled Newton-Raphson-type approach is challenging in terms of the required assembly, storage, and solution of the resulting block-coupled system. In addition, the derivation of the true Jacobian matrix is non-trivial. Consequently, similar block-coupled solution finite volume methods are rare in the literature [1–3]. The motivation of the current work is to seek (or exceed) the robustness and efficiency of block-coupled Newton-Raphson approaches in a way that can be easily incorporated into existing segregated solution frameworks. To this end, the current article examines the efficacy of *Jacobian-free* Newton-Krylov methods, where the quadratic convergence of Newton methods can potentially be achieved without deriving, assembling and storing the exact Jacobian.

Jacobian-free Newton-Krylov methods circumvent the need for the Jacobian matrix by combining the Newton-Raphson method with Krylov subspace iterative linear solvers, such as GMRES, and noticing that such Krylov solvers do not explicitly require the Jacobian matrix. Instead, only the action of the Jacobian matrix on a solution-type vector is required. The key step in Jacobian-free Newton-Krylov methods is the approximation of products between the Jacobian matrix and a vector using the finite difference method; that is

$$\mathbf{J}\mathbf{v} \approx \frac{\mathbf{F}(\mathbf{x} + \epsilon\mathbf{v}) - \mathbf{F}(\mathbf{x})}{\epsilon} \quad (1)$$

where \mathbf{J} is the Jacobian matrix, \mathbf{x} is the current solution vector (e.g. nodal displacements), \mathbf{v} is a vector (e.g., from a Krylov subspace), and ϵ is a small scalar perturbation. With an appropriate choice of ϵ (balancing truncation and round-off errors), the characteristic quadratic convergence of Newton methods can be achieved without the Jacobian, hence the modifier *Jacobian-free*. This approach promises significant memory savings over Jacobian-based methods, especially for large-scale, but also potentially for execution time, with appropriate choice of solution components.

A crucial aspect of ensuring the efficiency and robustness of the Jacobian-free Newton-Krylov method is the choice of a suitable preconditioner for the Krylov iterations. This preconditioner is often derived from the exact Jacobian matrix in traditional Newton methods. However, the Jacobian-free approach does not allow direct access to the full Jacobian matrix, necessitating an alternative strategy to approximate its action. To this end, and to extend existing segregated frameworks, we propose using a compact-stencil approximate Jacobian as the preconditioner. This approximate Jacobian corresponds to the matrix typically employed in segregated approaches; similar approaches are successful in fluid mechanics applications [4?]; however, it is unclear if such an approach is suitable for solid mechanics - a question which we hope to answer in this work. By leveraging this compact-stencil approximate Jacobian, we aim to effectively precondition the Krylov iterations, enhancing convergence while maintaining the memory and computational savings that define the Jacobian-free and segregated methods. Similarly, if such an approach is efficient, it would naturally fit into existing segregated frameworks, as existing matrix storage and assembly can be reused.

The remainder of the paper is structured as follows: Section 2 summarises a typical solid mechanics mathematical model and its cell-centred finite volume discretisation. Section 3 presents the solution algorithms, starting with the classic segregated solution algorithm, followed by the proposed Jacobian-free Newton-Krylov solution algorithm. The performance of the proposed Jacobian-free Newton-Krylov approach is compared with the segregated approach on several varying benchmark cases in Section 4, where the effect of several factors are examined, including problem dimension, mesh, material model, nonlinear geometry, choice of preconditioner, and other solution parameter. Finally, the article ends with a summary of the main conclusions of the work.

2 Mathematical Model and Numerical Methods

2.1 Governing Equations

In this work, we restrict our interest to Lagrangian formulations of the conservation of linear momentum. Assuming small strains, the linear geometry formulation is expressed in strong integral form as:

$$\int_{\Omega} \rho \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega = \oint_{\Gamma} \mathbf{n} \cdot \boldsymbol{\sigma}_s d\Gamma + \int_{\Omega} \mathbf{f}_b d\Omega \quad (2)$$

where Ω is the volume of an arbitrary body bounded by a surface Γ with outwards pointing normal \mathbf{n} . The density is ρ , \mathbf{u} is the displacement vector, $\boldsymbol{\sigma}_s$ is the engineering (small strain) stress tensor, and \mathbf{f}_b is a body force per unit volume, e.g., $\rho \mathbf{g}$, where \mathbf{g} is gravity.

More generally, linear momentum conservation can be expressed in a nonlinear geometry form, which is suitable for finite strains. Two equivalent nonlinear geometry forms are common: the *total* Lagrangian form:

$$\int_{\Omega_o} \rho_o \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega_o = \oint_{\Gamma_o} (J \mathbf{F}^{-T} \cdot \mathbf{n}_o) \cdot \boldsymbol{\sigma} d\Gamma_o + \int_{\Omega_o} \rho_o \mathbf{g} d\Omega_o \quad (3)$$

and the *updated* Lagrangian form:

$$\int_{\Omega_u} \frac{\partial}{\partial t} \left(\rho_u \frac{\partial \mathbf{u}}{\partial t} \right) d\Omega_u = \oint_{\Gamma_u} (j \mathbf{f}^{-T} \cdot \mathbf{n}_u) \cdot \boldsymbol{\sigma} d\Gamma_u + \int_{\Omega_u} \rho_u \mathbf{g} d\Omega_u \quad (4)$$

where subscript o indicates quantities in the initial reference configuration, and subscript u indicates quantities in the updated configuration. The true (Cauchy) stress tensor is indicated by $\boldsymbol{\sigma}$.

The deformation gradient is defined as $\mathbf{F} = \mathbf{I} + (\nabla \mathbf{u})^T$ and its determinant as $J = \det(\mathbf{F})$. Similarly, the *relative* deformation gradient is given in terms of the displacement *increment* as $\mathbf{f} = \mathbf{I} + [\nabla(\Delta \mathbf{u})]^T$ and its determinant as $j = \det(\mathbf{f})$. The displacement increment is the change in displacement between the current time step and the previous time step when the time interval is discretised into a finite number of steps.

The definition of the engineering stress ($\boldsymbol{\sigma}_s$) and true stress ($\boldsymbol{\sigma}$) in Equations 2, 3 and 4 is given by a chosen mechanical law, e.g. linear elasticity. Several mechanical laws are considered in this work, as briefly described in Section 4.

2.2 Newton-Type Solution Methods

To facilitate the comparison between classic segregated solution algorithms and the proposed Jacobian-free Newton-Krylov algorithm, the governing linear momentum conservation (Equations 2, 3 and 4) is expressed in the general form:

$$\mathcal{R}(\mathbf{u}) = \mathbf{0} \quad (5)$$

where \mathcal{R} represents the *residual* (imbalance) of the equation, which is a function of the primary unknown field. For example, in the linear geometry case, the residual is given as

$$\mathbf{R}(\mathbf{u}) = \oint_{\Gamma} \mathbf{n} \cdot \boldsymbol{\sigma}_s(\mathbf{u}) d\Gamma + \int_{\Omega} \rho \mathbf{g} d\Omega - \int_{\Omega} \rho \frac{\partial^2 \mathbf{u}}{\partial t^2} d\Omega = \mathbf{0} \quad (6)$$

where the dependence of the stress tensor on the solution vector is made explicitly clear: $\boldsymbol{\sigma}_s(\mathbf{u})$.

In Newton-type methods, a Taylor expansion about a current point \mathbf{u}_k can be used to solve Equation 5 [5]:

$$\mathbf{R}(\mathbf{u}_{k+1}) = \mathbf{R}(\mathbf{u}_k) + \mathbf{R}'(\mathbf{u}_k)(\mathbf{u}_{k+1} - \mathbf{u}_k) + \text{H.O.T.} = \mathbf{0} \quad (7)$$

Neglecting the higher-order terms (H.O.T.) yields the strict Newton method in terms of an iteration over a sequence of linear systems:

$$\begin{aligned} \mathbf{J}(\mathbf{u}_k) \delta \mathbf{u} &= -\mathbf{R}(\mathbf{u}_n), \\ \mathbf{u}_{k+1} &= \mathbf{u}_k + s \delta \mathbf{u}, \\ k &= 0, 1, \dots \end{aligned} \quad (8)$$

where $\mathbf{J} \equiv \mathbf{R}'$ is the Jacobian matrix. Starting the Newton procedure requires the specification of \mathbf{u}_0 . The scalar $s > 0$ can be chosen to improve convergence, for example, using a line search or under-relaxation procedure, and is equal to unity in the classic Newton-Raphson approach. Iterations are performed over this system until the residual $\mathbf{R}(\mathbf{u}_n)$ and solution correction $\delta\mathbf{u}$ are sufficiently small, with appropriate normalisation.

For problems with N scalar equations and N scalar unknowns, the residual \mathbf{R} and solution \mathbf{u} vectors have dimensions of $N \times 1$. The components of the $N \times N$ Jacobian are

$$J_{ij} = \frac{\partial R_i(\mathbf{u})}{\partial u_j} \quad (9)$$

In the current work, we are interested in vector problems, where the governing momentum equation is formulated in terms of the unknown displacement solution vector. In this case, Equation 9 refers to the individual scalar components of the residual, solution, and Jacobian. That is, for 3-D analyses, the residual takes the form

$$\mathbf{R}(\mathbf{u}) = \{R_1^x, R_1^y, R_1^z, R_2^x, R_2^y, R_2^z, \dots, R_n^z\} \quad (10)$$

and the solution takes the form

$$\mathbf{u} = \{u_1^x, u_1^y, u_1^z, u_2^x, u_2^y, u_2^z, \dots, u_n^z\} \quad (11)$$

In practice, it is often more practical and efficient to form and store the residual, solution and Jacobian in a *blocked* manner, where the residual and solution can be considered as vectors of vectors. Similarly, the Jacobian can be formed in terms of sub-matrix block coefficients.

In the strict Newton procedure, the residuals converge at a quadratic rate when the current solution is close to the true solution; that is, the iteration error decreases proportionally to the square of the error at the previous iteration. Once the method gets sufficiently close to the true solution, the number of correct digits in the approximation roughly doubles with each iteration. However, quadratic convergence is only possible when using the exact Jacobian. In contrast, a quasi-Newton method uses an approximation to the Jacobian, sacrificing strict quadratic convergence in an attempt to produce an overall more computationally efficient procedure. From this perspective, the segregated solution algorithm commonly employed in finite volume solid mechanics can be viewed as a quasi-Newton method, where an approximate Jacobian replaces the exact Jacobian:

$$\tilde{\mathbf{J}}(\mathbf{u}_k) \delta\mathbf{u} = -\mathbf{R}(\mathbf{u}_k) \quad (12)$$

In this case, the approximate Jacobian $\tilde{\mathbf{J}}$ comes from the compact stencil discretisation of a simple diffusion (Laplacian) term. A benefit of this approach is that the inter-component coupling is removed from the Jacobian, allowing the solution of three smaller scalar systems rather than one larger vector system in 3-D (or two smaller systems in 2-D).

A fully explicit procedure can also be viewed from this perspective by selecting an approximate Jacobian which is diagonal $\tilde{\mathbf{D}}$, making solution of the linear system trivial:

$$\tilde{\mathbf{D}}(\mathbf{u}_k) \delta\mathbf{u} = -\mathbf{R}(\mathbf{u}_k) \quad (13)$$

2.3 Cell-Centred Finite Volume Discretisation

In this work, a nominally second-order cell-centred finite volume discretisation is employed, as described previously, for example, [6–9]. Consequently, only a summary of the discretisation is presented below.

The solution domain is discretised in both space and time. The total simulation period is divided into a finite number of time increments, denoted as Δt , and the discretised governing momentum equation is solved iteratively in a time-marching fashion. The spatial domain is partitioned into a finite number of contiguous convex polyhedral cells.

The conservation equation (Equations 2, 3, or 4) is applied to each cell (control volume) in the computational mesh and discretised in terms of the displacement at the cell centre/centroid \mathbf{u}_P and at the centres of the neighbouring cells N_i .

To complete the discretisation, the volume integrals and surface integrals in the governing equation must be approximated by algebraic equations. Starting first with the volume integrals, assuming a linear variation of the integrand, the mid-point rule approximates the integral in terms of the cell centre value. Consequently, the inertia term (e.g. left-hand side term of Equation 2) becomes

$$\int_{\Omega} \rho \frac{\partial \mathbf{u}}{\partial t} d\Omega \approx \rho_P \left(\frac{\partial^2 \mathbf{u}}{\partial t^2} \right)_P \Omega_P \quad (14)$$

and, similarly, the body force term (e.g. the second term on the right-hand side of Equation 2) becomes:

$$\int_{\Omega} \rho \mathbf{g} d\Omega \approx \rho_P \mathbf{g} \Omega_P \quad (15)$$

where subscript P indicates a quantity at the cell centre. The discretisation of the acceleration in time in Equation 14 can be achieved using the finite difference method, e.g. first-order Euler, second-order backwards, second-order Newmark-beta. Maybe we should give the temporal discretisation for completeness: i.e. 2nd order backwards

The surface integral term (e.g. first term on the right-hand side of Equation 2), corresponding to the divergence of stress, is discretised by assuming that the stress varies linearly across the face, allowing the mid-point rule to be used:

$$\oint_{\Gamma} \mathbf{n} \cdot \boldsymbol{\sigma} d\Gamma \approx \sum_{f \in N_f} \mathbf{\Gamma}_f \cdot \boldsymbol{\sigma}_f \quad (16)$$

where subscript f indicates a quantity at the centre of a cell face, and N_f represents the set of neighbouring cells which share a face with cell P . The stress at a face, σ_f , is calculated by linearly interpolating from the adjacent cell centres. Stress is calculated at the cell centres as a function of the displacement gradient, $(\nabla \mathbf{u})_f$, and the cell-centre gradients are determined using a least squares method [?].

The discretisation is complete but, in its current form, is known to suffer from zero-energy modes, i.e. checkerboarding oscillations. Here, a Rhie-Chow-type stabilisation term [10] is added to the residual (Equation 5) to quell such oscillations. The Rhie-Chow stabilisation term, first used for finite volume solid mechanics by Demirdžić and Muzaferija [11], consists of the numerical difference between a diffusion (Laplacian) term calculated using compact and larger computational stencils. The term introduces numerical diffusion to the discretisation, which reduces at a third-order rate. In the current approach, the Rhie-Chow stabilisation term $\mathcal{D}_{\text{Rhie-Chow}}$ for a cell P takes the following form:

$$\mathcal{D}_{\text{Rhie-Chow}} = \sum_{f \in N_f} \alpha \bar{K}_f \left[|\Delta_f| \frac{\mathbf{u}_{N_f} - \mathbf{u}_P}{|\mathbf{d}_f|} - \Delta_f \cdot (\nabla \mathbf{u})_f \right] |\Gamma_f| \quad (17)$$

where $\alpha > 0$ is a user-defined parameter for globally scaling the amount of stabilisation. Parameter \bar{K}_f is a stiffness-type parameter that gives the stabilisation an appropriate scale and dimension. Here, $\bar{K}_f = \frac{4}{3}\mu + \kappa = 2\mu + \lambda$ following previous work [? ? ?], where μ is the shear modulus (first Lamé parameter), κ is the bulk modulus, and λ is the second Lamé parameter. Vector \mathbf{d}_f connects cell centre P with the other cell sharing face f , and \mathbf{n}_f is the outward-facing unit normal to the face f . The vector $\Delta_f = \frac{\mathbf{d}_f}{\mathbf{d}_f \cdot \mathbf{n}_f}$ is termed the *over-relaxed orthogonal* vector [12] and increases in magnitude as the deviation between the \mathbf{d}_f and \mathbf{n}_f vectors increases. In this way, the amount of stabilisation increases on distorted meshes. Should we mention Nishikawa alpha scheme? Very similar: but scales differently with mesh distortion

In Equation 17, the first term within the brackets on the right-hand side represents a compact stencil (two-node) approximation of the face normal gradient, while the second term represents a larger stencil approximation. These two terms cancel out in the limit of mesh refinement (or if the solution varies linearly); otherwise, they produce a stabilisation effect that tends to smooth the solution fields. As the term reduces at a third-order rate, it does not affect the overall scheme's second-order accuracy.

All dependent variables must be specified at the initial time. Boundary conditions must be applied to the faces that coincide with the boundary of the solution domain. The discretised expressions on boundary faces are modified to account for either the known displacement components in Dirichlet conditions or the known traction for Neumann conditions.

Comment on traction boundaries extrapolate to get value or use constitutive law

3 Solution Algorithms

3.1 Segregated Solution Algorithm

The classic segregated solution algorithm can be viewed as a quasi-Newton method, where a compact-stencil approximation of a diffusion term is employed as the approximate Jacobian:

$$\begin{aligned}\tilde{\mathbf{J}} &= \oint_{\Gamma} \bar{K} \mathbf{n} \cdot \nabla \mathbf{u} d\Gamma \\ &\approx \sum_{f \in N_f} \bar{K}_f |\Delta_f| \left(\frac{\mathbf{u}_{N_f} - \mathbf{u}_P}{|d_f|} \right) |\Gamma_f|\end{aligned}\quad (18)$$

When a diffusion term is typically discretised using the cell-centre finite volume method, non-orthogonal corrections are included in a deferred correction manner to preserve the order of accuracy on distorted grids. However, in the Newton method case, the approximate Jacobian's exact value does not affect the final converged solution, but only the convergence behaviour. Consequently, non-orthogonal corrections are not included in the approximate Jacobian here. However, grid distortion is appropriately accounted for in the calculation of the residual. Nonetheless, as a result, it is expected that the convergence behaviour of the segregated approach may degrade as mesh non-orthogonality increases.

The linearised system (Equation 12) is formed for each cell in the domain, resulting in a system of algebraic equations:

$$\tilde{\mathbf{J}}(\mathbf{u}_n) \delta \mathbf{u} = -\mathbf{R}(\mathbf{u}_n) \quad (19)$$

where $\tilde{\mathbf{J}}$ is a symmetric, weakly diagonally dominant, $M \times M$ stiffness matrix, where M is three times the number of cells in 3-D and twice the number of cells in 2-D. By design, matrix $\tilde{\mathbf{J}}$ contains no inter-component coupling; consequently, three equivalent smaller linear systems can be formed and solved for the Cartesian components of the displacement correction (or two in 2-D), e.g.

$$\tilde{\mathbf{J}}_x(\mathbf{u}_n) \Delta \mathbf{u}_x = -\mathcal{R}_x(\mathbf{u}_n) \quad (20)$$

$$\tilde{\mathbf{J}}_y(\mathbf{u}_n) \Delta \mathbf{u}_y = -\mathcal{R}_y(\mathbf{u}_n) \quad (21)$$

$$\tilde{\mathbf{J}}_z(\mathbf{u}_n) \Delta \mathbf{u}_z = -\mathcal{R}_z(\mathbf{u}_n) \quad (22)$$

where \bullet_x represents the components in the x direction, \bullet_y represents the components in the y direction, and \bullet_z represents the components in the z direction. An additional benefit of the segregated approach, from a memory perspective, is that matrices $\tilde{\mathbf{J}}_x$, $\tilde{\mathbf{J}}_y$ and $\tilde{\mathbf{J}}_z$ are identical, except for the effects from including boundary conditions. From an implementation perspective, this allows a single scalar matrix to be formed and stored, where the boundary condition contributions are inserted before solving a particular component.

The *inner* linear sparse systems (Equations 20, 21 and 22) can be solved using any typical direct or iterative linear solver approach; however, an incomplete Cholesky pre-conditioned conjugate

gradient method [13] is often preferred as the weakly diagonally dominant characteristic leads to good convergence characteristics. Algebraic multigrid can be used to accelerate convergence.

In literature, the segregated solution algorithm is typically formulated in terms of the total displacement vector (or its difference between time steps) as the primary unknown; in contrast, in the quasi-Newton interpretation presented here, the primary unknown is the correction to the displacement vector, which goes to zero at convergence. Nonetheless, both approaches are equivalent and neither formulation displays superior performance.

The current procedure is implemented and publicly shared in the solids4foam toolbox of OpenFOAM. Add a section about code sharing: appendix?

Comment: we have two implementations of segregated: native OpenFOAM (solves Eqs 16-18) and PETSc SNES (solves Eq 15) Do we need to comment on this? Maybe we should use only PETSc SNES for a fair comparison Or we could use both on the verification case and then stick with just one afterwards

3.2 Jacobian-free Newton-Krylov Algorithm

As noted in the introduction, the Jacobian-free Newton-Krylov avoids the need to construct the Jacobian matrix explicitly by approximating its action on a solution vector using the finite difference method, repeated here:

$$\mathbf{J}\mathbf{v} \approx \frac{\mathbf{F}(\mathbf{x} + \epsilon\mathbf{v}) - \mathbf{F}(\mathbf{x})}{\epsilon} \quad (23)$$

The derivation of this approximation can be shown for a 2×2 system as [5]:

$$\begin{aligned} \frac{\mathbf{F}(\mathbf{x} + \epsilon\mathbf{v}) - \mathbf{F}(\mathbf{x})}{\epsilon} &= \left(\begin{array}{c} \frac{F_1(x_1 + \epsilon v_1, x_2 + \epsilon v_2) - F_1(x_1, x_2)}{\epsilon} \\ \frac{F_2(x_1 + \epsilon v_1, x_2 + \epsilon v_2) - F_2(x_1, x_2)}{\epsilon} \end{array} \right) \\ &\approx \left(\begin{array}{c} \frac{F_1(x_1, x_2) + \epsilon v_1 \frac{\partial F_1}{\partial u_1} + \epsilon v_2 \frac{\partial F_1}{\partial u_2} - F_1(x_1, x_2)}{\epsilon} \\ \frac{F_2(x_1, x_2) + \epsilon v_1 \frac{\partial F_2}{\partial u_1} + \epsilon v_2 \frac{\partial F_2}{\partial u_2} - F_2(x_1, x_2)}{\epsilon} \end{array} \right) \\ &\approx \left(\begin{array}{c} v_1 \frac{\partial F_1}{\partial u_1} + v_2 \frac{\partial F_1}{\partial u_2} \\ v_1 \frac{\partial F_2}{\partial u_1} + v_2 \frac{\partial F_2}{\partial u_2} \end{array} \right) \\ &\approx \mathbf{J}\mathbf{v} \end{aligned} \quad (24)$$

where a first-order truncated Taylor series expansion about \mathbf{u} was used to approximate $\mathbf{F}(\mathbf{x} + \epsilon\mathbf{v})$. As noted above, choosing an appropriate value for ϵ is non-trivial, and care must be taken to balance truncation error (reduced by decreasing ϵ) and round-off error (increased by decreasing ϵ).

The purpose of preconditioning the Jacobian-free Newton-Krylov method is to reduce the number of inner linear solver iterations. In the current work, the GMRES linear solver is used for the inner system. Using right preconditioning, the finite difference approximation of Equation 23

becomes

$$\mathbf{J}\mathbf{P}^{-1}\mathbf{v} \approx \frac{\mathbf{F}(\mathbf{x} + \epsilon\mathbf{P}^{-1}\mathbf{v}) - \mathbf{F}(\mathbf{x})}{\epsilon} \quad (25)$$

where \mathbf{P} is the preconditioning matrix or process. In practice, only the action of \mathbf{P}^{-1} on a vector is required, and the \mathbf{P}^{-1} may not be explicitly formed. Concretely, the preconditioner needs to approximately solve the linear system $\mathbf{y} = \mathbf{P}^{-1}\mathbf{v}$.

In the current work, we proposed to use the compact-stencil approximate Jacobian from the segregated algorithm $\tilde{\mathbf{J}}$ as the preconditioning matrix \mathbf{P} for the preconditioned Jacobian-free Newton-Krylov method. **Comment on literature: used before but not yet for solids.** This preconditioning approach can be considered as a “physics-based” preconditioner in the classifications of [5]. The approach is conceptually similar to an approximation of the Jacobian of a higher-order advection scheme by a compact-stencil lower-order upwind scheme. A benefit of the proposed approach is that existing segregated frameworks can re-use their existing discretisation and storage implementations. Concretely, the Jacobian-free Newton-Krylov method requires only a procedure for forming this preconditioning matrix and a procedure for explicitly evaluating the residual. Both routines are easily implemented in an existing segregated framework. The only additional required procedure is an interface to an existing Jacobian-free Newton-Krylov implementation. In the current work, the PETSc toolbox [14] is used as the nonlinear solver, where driven by a finite volume solver in the OpenFOAM toolbox [?].

Several preconditioners are available in the literature, incomplete Cholesky/LU being popular; however, multigrid methods offer the greatest potential for large-scale problems. Knoll and Keyes [5] noted that algorithmic simplifications within a multigrid procedure, which may result in loss of convergence for multigrid as a solver, have a much weaker effect when multigrid is the preconditioner. In this work, three preconditioners are considered:

1. ILU(N): incomplete LU with fill-in N . The segregated solver uses ILU(0), that is, ILU with zero fill-in.
2. Multigrid: here, we use the HYPRE Boomerang multigrid implementation.
3. LU: for comparison, we consider a direct LU decomposition solver as the preconditioner.

A challenge with Newton-type methods, including Jacobian-free versions, is convergence can be poor when far from the true solution, and divergence is often a real possibility. Globalisation refers to steering an initial solution towards the quadratic convergence range of the Newton method. Several strategies are possible, and it is common to combine approaches [5]. In the current work, a line search procedure is used to select the s parameter in the solution update step (the second line in Equations 8). Line search methods assume the Newton update direction is correction and aim to find a scalar $s > 0$ that decreases the residual $\mathbf{R}(\mathbf{u}_k + s\delta\mathbf{u}) < \mathbf{R}(\mathbf{u}_k)$. The scalar s is typically ≤ 1 , but extrapolation (> 1) is also possible for accelerating convergence, albeit at the expense of robustness.

In addition to a line search approach, a *transient continuation* globalisation approach is used in the current work, where a prediction for the solution (displacement) field at time $t + \Delta t$ is performed

at the start of a new time step, based on a truncated second-order Taylor series expansion:

$$\mathbf{u}_{t+\Delta t} = \mathbf{u}_t + \Delta t \left(\frac{\partial \mathbf{u}}{\partial t} \right)_t + \frac{1}{2} \Delta t^2 \left(\frac{\partial^2 \mathbf{u}}{\partial t^2} \right)_t \quad (26)$$

where Δt is the time increment (assumed constant here), $\left(\frac{\partial \mathbf{u}}{\partial t} \right)_t$ is the velocity at time t , and $\left(\frac{\partial^2 \mathbf{u}}{\partial t^2} \right)_t$ is the acceleration at time t . In this way, for highly nonlinear problems, the user can decrease the time step size Δt as a globalisation approach to improve the performance of the Newton method. The predictor step in Equation 26 has been chosen to be consistent with the assumed discretisation of the temporal term in the governing equation; that is, the second order backwards scheme is assumed.

A final comment on the Jacobian-free Newton-Krylov solution algorithm is the potential importance of *oversolving*. Here, oversolving refers to solving the linear system to too tight a tolerance during the early Newton iterations, essentially wasting time when the solution is far from the true solution. In addition, some authors [5] have shown Newton convergence to be worse when the earlier iterations are solved to too tight a tolerance. The concept of oversolving also applies to segregated solution procedures and has been well-known since the early work of Demirdžić and co-workers [?], where the residuals are typically reduced by one order of magnitude in the inner linear system. The optimal choice of residual reduction for a Jacobian-free Newton-Krylov finite volume solid mechanics procedure is explored in Section 4. Check: do we examine this?

4 Test Cases

This section assesses the performance of the proposed Jacobian-free Newton-Krylov solution approach on several benchmark cases. The cases have been chosen to exhibit a variety of characteristics in terms of

- Geometric dimension (2-D vs. 3-D),
- Geometric nonlinearity (small strain vs. large strain)
- Statics vs. dynamics, and
- Material behaviour (elasticity, elastoplasticity, hyperelasticity).

In addition, through the analysis of the benchmark cases above, the effect of several parameters will be examined, including the mesh types, Rhie-Chow stabilisation scaling, preconditioner choices, linear solver settings, the effect of globalisation strategies, and multi-CPU-core parallelisation. The performance of the Jacobian-free Newton-Krylov algorithm is compared with that of the segregated algorithm in terms of computational time and memory requirements. Metrics from a commercial finite element software (Abaqus) are included for reference ask Dylan to run Abaqus cases once we have our results.

The presented analyses aim to be extensive but not exhaustive. Several common features of modern solid mechanics procedures are left for future work, including contact mechanics and incompressibility.

The remainder of this section is structured as follows: The proposed discretisation's accuracy and order are assessed on several test cases of varying dimensions and phenomena. Subsequently, the remaining sub-sections assess the efficiency of the Jacobian-free Newton-Krylov approach compared with the standard segregated procedure and, in some cases, finite element solutions.

4.1 Testing the Accuracy and Order of Accuracy

This section solely focuses on assessing the accuracy and order of accuracy of the discretisation. Assessment of the computational efficiency regarding time and memory requirements is left to the subsequent sections.

Case 1: Order Verification via the Manufactured Solution Procedure

The first test case consists of a $0.2 \times 0.2 \times 0.2$ m cube with linear elastic ($E = 200$ GPa, $\nu = 0.3$) properties. A manufactured solution for displacement (Figure 1(a)) is employed of the form:

$$\mathbf{u} = \begin{pmatrix} a_x \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \\ a_y \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \\ a_z \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \end{pmatrix} \quad (27)$$

where $a_x = 2 \times 10^{-6}$ m, $a_y = 4 \times 10^{-6}$ m, and $a_z = 6 \times 10^{-6}$ m. The Cartesian coordinates are given by x , y and z . The corresponding manufactured body force term is given in Appendix A.

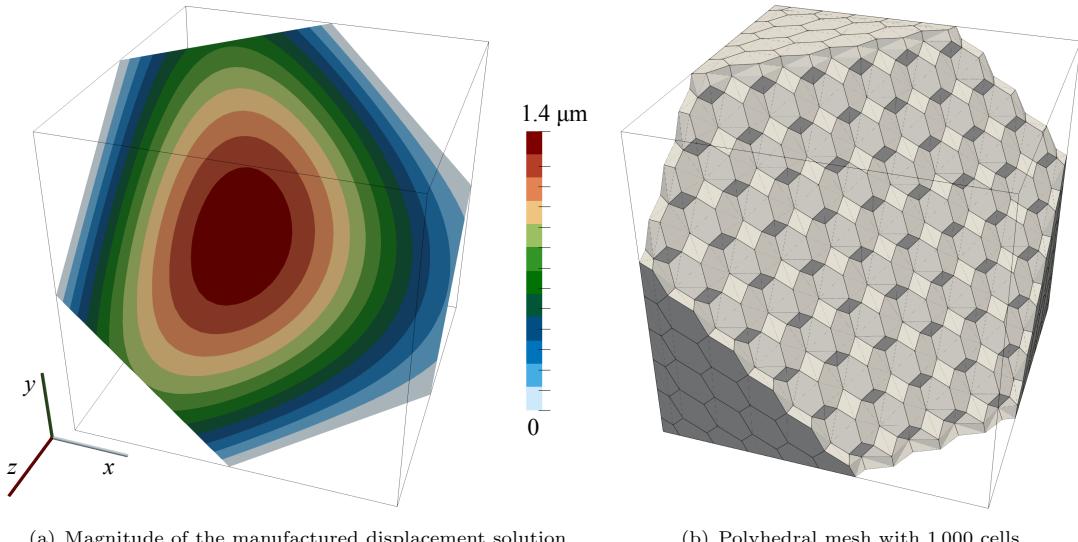


Fig. 1 A cut plane through the cube case geometry showing the magnitude of the manufactured displacement solution (left) and a polyhedral mesh with 1 000 cells (right). The cut plane passes through the centre of the cube and has the unit normal $\mathbf{n} = (1/\sqrt{3} \quad 1/\sqrt{3} \quad 1/\sqrt{3})$.

The manufactured displacement solution is applied at the domain's boundaries, and inertial effects are neglected. Three mesh types are examined: (i) hexahedra, (ii) tetrahedra, and (iii) regular

polyhedra (Figure 1(b)). The hexahedral meshes are created using the OpenFOAM `blockMesh` utility, while the tetrahedral meshes are created using Gmsh [15]. To create the polyhedral meshes, the tetrahedra meshes are converted to their dual polyhedral representations using the OpenFOAM `polyDualMesh` utility. Starting from an initial mesh spacing of 0.04 m, six meshes are created by successively halving the spacing. The cell numbers for the hexahedral and polyhedral meshes are 125, 1 000, 8 000, 64 000, 512 000, and 4 096 000, while the tetrahedral mesh cell counts are 384, 4 374, 41 154, 355 914, 2 958 234, and 24 118 074. For the same average cell width, the cell counts show that the tetrahedral meshes have larger cell counts by a factor of 3 to 6.

Figure 2(a) shows the displacement magnitude discretisation errors (L_2 and L_∞) as a function of the average cell width for all three mesh types (hexahedral, tetrahedral and polyhedral), while Figure 2(b) shows the corresponding order of accuracy plots. For ease of interpretation, the symbol shapes in the figures have been chosen to correspond to the cell shapes: a square for hexahedra, a triangle for tetrahedra and a pentagon for polyhedra. The maximum (L_∞) and average (L_2) discretisation errors are seen to reduce at an approximately second-order rate for all mesh types, except for the L_2 error on the hexahedral meshes, which is approximately 2.3 on the finest grid.

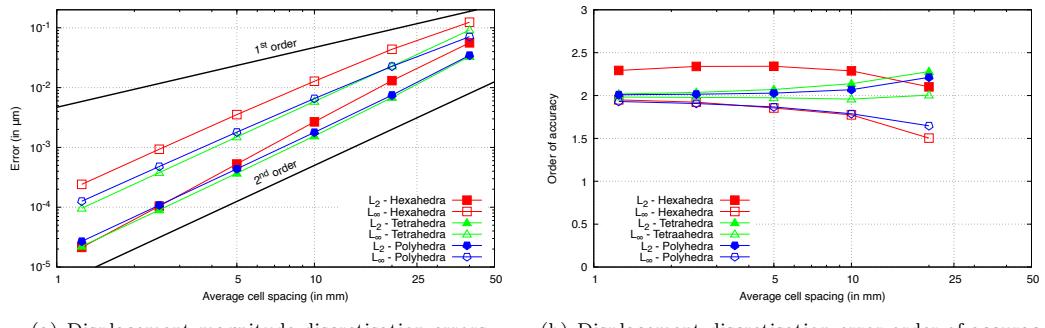


Fig. 2 Manufactured solution cube case: the accuracy and order of accuracy for displacement magnitude

The predicted σ_{xx} stress distribution for a hexahedral mesh with 512 000 cells is shown in Figure 3(a). The corresponding cell-wise σ_{xx} error distribution is shown in Figure 3(b). The errors of greatest magnitude (43 kPa) occur at the boundaries, corresponding to where the local truncation error is higher due to the use of one-sided differencing. The discretisation errors in the stress magnitude are shown in Figure 4(a), and the order of accuracy in Figure 4(b). The order of accuracy for the average (L_2) stress error is seen to be approximately 1.5 for the hexahedral and polyhedral meshes. In contrast, the average stress error order for the tetrahedral meshes is 1. Similarly, the maximum (L_∞) stress order of accuracy is seen to approach 1 for all three mesh types.

The presented results have been generated using the Jacobian-free Newton-Raphson solution algorithm; however, minimal differences were seen when using the segregated solution algorithm, and hence, the segregated results are not shown.

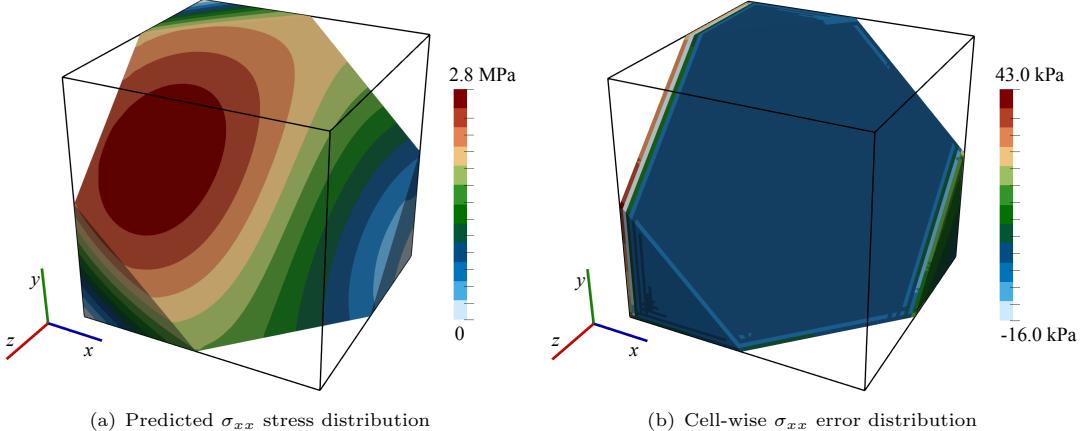


Fig. 3 Manufactured solution cube case: the predicted σ_{xx} stress distribution on a cut-plane for the hexahedral mesh with 512 000 cells (left).

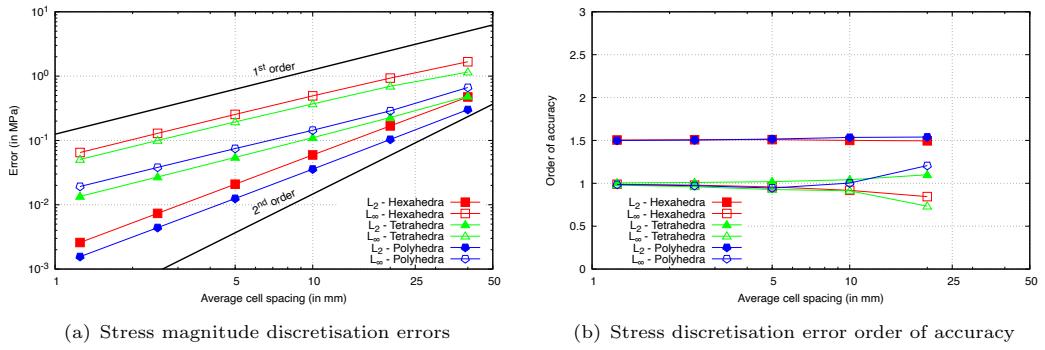


Fig. 4 Manufactured solution cube case: the accuracy and order of accuracy for stress magnitude

Case 1b: Spherical Cavity in an Infinite Solid Subjected to Remote Stress

This 3-D problem consists of a spherical cavity with radius $a = 0.2$ m (Figure 5) in an infinite, isotropic linear elastic solid ($E = 200$ GPa, $\nu = 0.3$). Far from the cavity, the solid is subjected to a tensile stress $\sigma_{zz} = T = 1$ MPa, with all other stress components zero. The analytical expressions

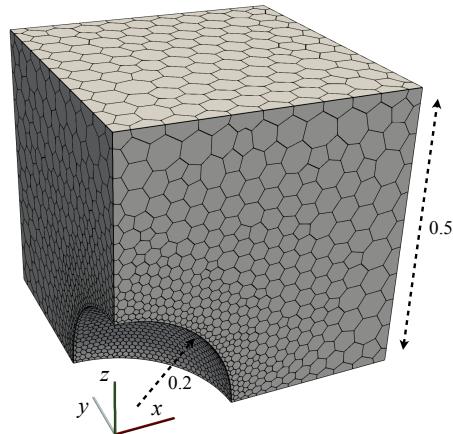


Fig. 5 Spherical cavity case geometry, showing the polyhedral mesh with 4539

for the stress distributions around the cavity, first derived by [16], are

$$\sigma_{rr} = \frac{T}{14 - 10\nu} \frac{a^3}{R^3} \left[9 - 15\nu - 12 \frac{a^2}{R^2} - \frac{r^2}{R^2} \left(72 - 15\nu - 105 \frac{a^2}{R^2} \right) + 15 \frac{r^4}{R^4} \left(5 - 7 \frac{a^2}{R^2} \right) \right], \quad (28)$$

$$\sigma_{\theta\theta} = \frac{T}{14 - 10\nu} \frac{a^3}{R^3} \left[9 - 15\nu - 12 \frac{a^2}{R^2} - 15 \frac{r^2}{R^2} \left(1 - 2\nu - \frac{a^2}{R^2} \right) \right], \quad (29)$$

$$\sigma_{zz} = T \left[1 - \frac{1}{14 - 10\nu} \frac{a^3}{R^3} \left\{ 38 - 10\nu - 24 \frac{a^2}{R^2} - \frac{r^2}{R^2} \left(117 - 15\nu - 120 \frac{a^2}{R^2} \right) + 15 \frac{r^4}{R^4} \left(5 - 7 \frac{a^2}{R^2} \right) \right\} \right], \quad (30)$$

$$\sigma_{zr} = \frac{T}{14 - 10\nu} \frac{a^3 z r}{R^5} \left[-3(19 - 5\nu) + 60 \frac{a^2}{R^2} + 15 \frac{r^2}{R^2} \left(5 - 7 \frac{a^2}{R^2} \right) \right]. \quad (31)$$

where $r^2 = x^2 + y^2$ is the cylindrical radial coordinate, $R^2 = r^2 + z^2$ is the spherical radial coordinate, and x, y, z are the Cartesian coordinates.

Philip please double check added displacement equations from Goodier

$$u_r = -\frac{A}{r^2} - \frac{3B}{r^4} + \left[\frac{5 - 4\nu}{1 - 2\nu} \frac{C}{r^2} - 9 \frac{B}{r^4} \right] \cos(2\theta), \quad (32)$$

$$u_\theta = -\left[\frac{2C}{r^2} + 6 \frac{B}{r^4} \right] \sin(2\theta), \quad (33)$$

where A, B and C constants are defined as follows:

$$\frac{A}{a^3} = -\frac{T}{8\mu} \frac{13 - 10\nu}{7 - 5\nu}, \quad \frac{B}{a^5} = -\frac{T}{8\mu} \frac{1}{7 - 5\nu}, \quad \frac{C}{a^3} = -\frac{T}{8\mu} \frac{5(1 - 2\nu)}{7 - 5\nu}. \quad (34)$$

We can move the analytical solutions to an appendix

The computational solution domain is taken as one-eighth of a $1 \times 1 \times 1$ m cube aligned with the Cartesian axes, with one corner at the centre of the sphere. The analytical tractions are applied at the far boundaries of the domain to mitigate the effects of finite geometry. Unstructured polyhedral meshes are employed with grading towards the cavity. The cell sizes at the cavity surfaces are 100, 50, 25, 12.5, 6.25, and 3.125 mm, and the corresponding cell counts are 976, 4552 (Figure 5), 29 611, 213 100, 614 261. Initially, unstructured tetrahedral meshes were generated using the Gmsh meshing utility [15], followed by conversion to their dual polyhedral representations using the OpenFOAM `polyDualMesh` utility.

The spherical cavity case errors seem to approach zero order accuracy. Maybe we have hit the precision limit...? We may leave this case out

Case 2: Out-of-plane bending of an elliptic plate

This 3-D, static, linear elastic test case (Figure 6) consists of a thick elliptic plate (0.6 m thick) with a centred elliptic hole, with the inner and outer ellipses given as

$$\left(\frac{x}{2}\right)^2 + \left(\frac{y}{1}\right)^2 = 1 \text{ inner ellipse} \quad (35)$$

$$\left(\frac{x}{3.25}\right)^2 + \left(\frac{y}{2.75}\right)^2 = 1 \text{ outer ellipse} \quad (36)$$

The case has been described by the National Agency for Finite Element Methods and Standards (NAFEMS) [17], and analysed using finite volume procedures by Demirdžić et al. [18] and Cardiff et al. [19]. Symmetry allows one-quarter of the geometry to be simulated. A constant pressure of 1 MPa is applied to the upper surface, and the outer surface is fully clamped. The mechanical properties are: $E = 210$ GPa, $\nu = 0.3$. Six successively refined hexahedral meshes are used, with cell counts of 45, 472 (Figure 6), 4140, 34968, 287280 and 2438242.

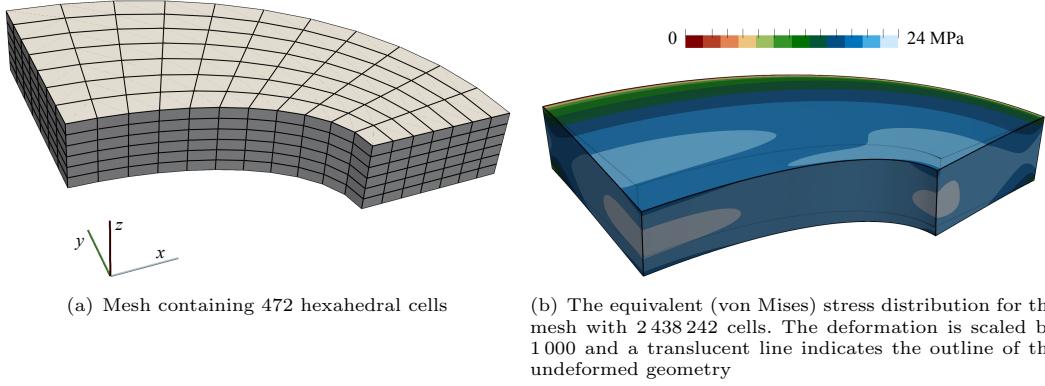


Fig. 6 Elliptic Plate case

The predictions for the equivalent (von Mises) stress along the line $r = \sqrt{x^2 + y^2} = 2.1$ m, $z = 0.3$ m is shown in Figure 7. The results from the finest grid in Demirdžić et al. [18] are given for comparison, where good agreement is seen; the small offset between the finest mesh predictions and those from Demirdžić et al. [18] are likely due to errors introduced when extracting the Demirdžić et al. [18] results using WebPlotDigitizer [?]. The sample values have been calculated by generating 40 uniformly spaced angles between 0 and $\frac{\pi}{2}$ along the line, finding the cell of each sampled point, and extrapolating from the cell-centred value using the field gradient.

Case 3: Narrow T-section component under tension

This case, proposed by Demirdžić et al. [18], consists of a narrow engineering component with a T cross-section (Figure 8). The case is 3-D, static, with linear elastic material behaviour. Symmetry allows one-quarter of the geometry to be simulated. A constant negative pressure of 1 MPa is applied to the lower surface, and the upper left surface is fully clamped. The Young's modulus is $E = 210$ GPa and Poisson's ratio is $\nu = 0.3$. A radius 5 mm hole is located at the expected stress concentration. **Comment on the meshes**

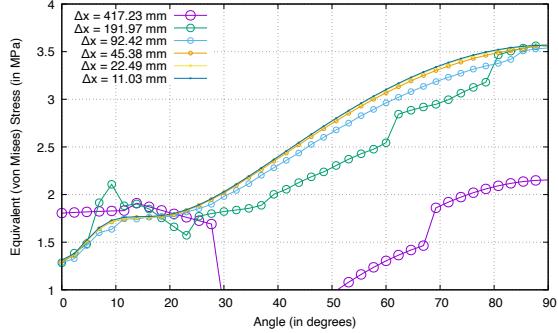


Fig. 7 Elliptic Plate: equivalent (von Mises) stress along the line $r = 2.1$, $z = 0.3$ m

Philip, so far I have been doing pictures in xfig which is a bit outdated so I am switching to inkscape. I know you have this image of geometry from your article, so feel free to replace it. I made it purely to practice inkscaping.

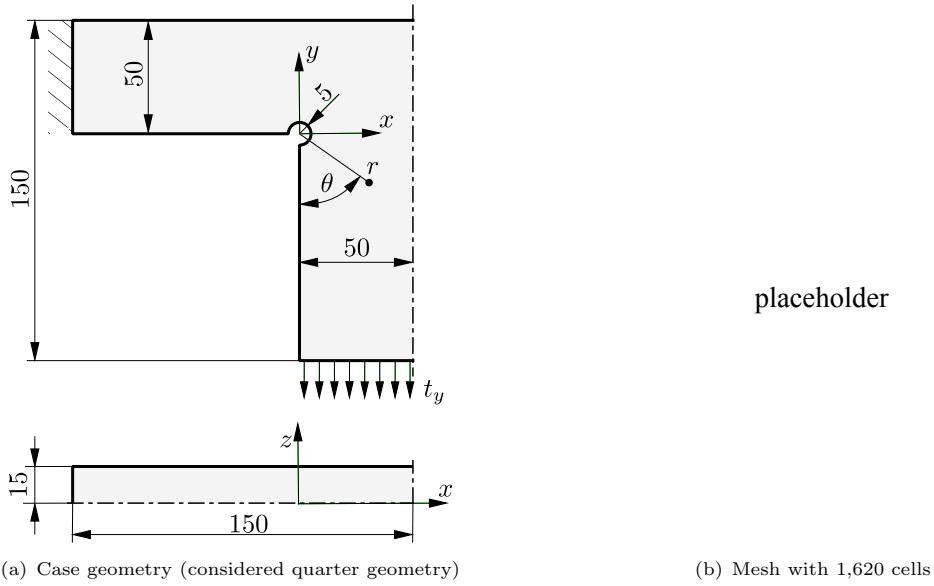


Fig. 8 Narrow T-section component under tension.

Case 4: Inflation of an idealised ventricle

Inflation of an idealised ventricle (Figure 9) was proposed by Land et al. [20] as a benchmark problem for cardiac mechanics software. The case is 3-D, static, with finite hyperelastic strains. The initial geometry is defined as a truncated ellipsoid:

$$x = r_s \sin(u) \cos(v), \quad y = r_s \sin(u) \sin(v), \quad z = r_l \cos(u) \quad (37)$$

where on the inner (endocardial) surface $r_s = 7$ mm, $r_l = 17$ mm, $u \in [-\pi, -\arccos(\frac{5}{17})]$ and $v \in [-\pi, \pi]$, while on the outer (epicardial) surface $r_s = 10$ mm, $r_l = 20$ mm, $u \in [-\pi, -\arccos(\frac{5}{20})]$ and $v \in [-\pi, \pi]$. The base plane $z = 5$ mm is implicitly defined by the ranges for u . The hyperelastic material behaviour is described by the transversely isotropic constitutive proposed by Guccione et al. [21] law, where the parameters $C = 10$ kPa, $b_f = b_t = b_{fs} = 1$. The benchmark specifies an

incompressible material; in the current work, incompressibility is enforced weakly using a penalty approach, where the bulk modulus parameter is chosen to be two orders of magnitude greater ($\kappa = 1000$ kPa) than the greatest shear modulus parameter. The chosen parameters produce isotropic behaviour. A pressure of 10 kPa is applied to the inner surface, and the base plane is fixed. The geometry is meshed using a structured approach and is predominantly composed of hexahedra, with prism cells forming the apex. The OpenFOAM utilities `blockMesh` and `extrudeMesh` are used to create the meshes. Four successively refined meshes are examined: 1,620 (shown in Figure 9(a)), 12,960, 103,680, and 829,440 cells.

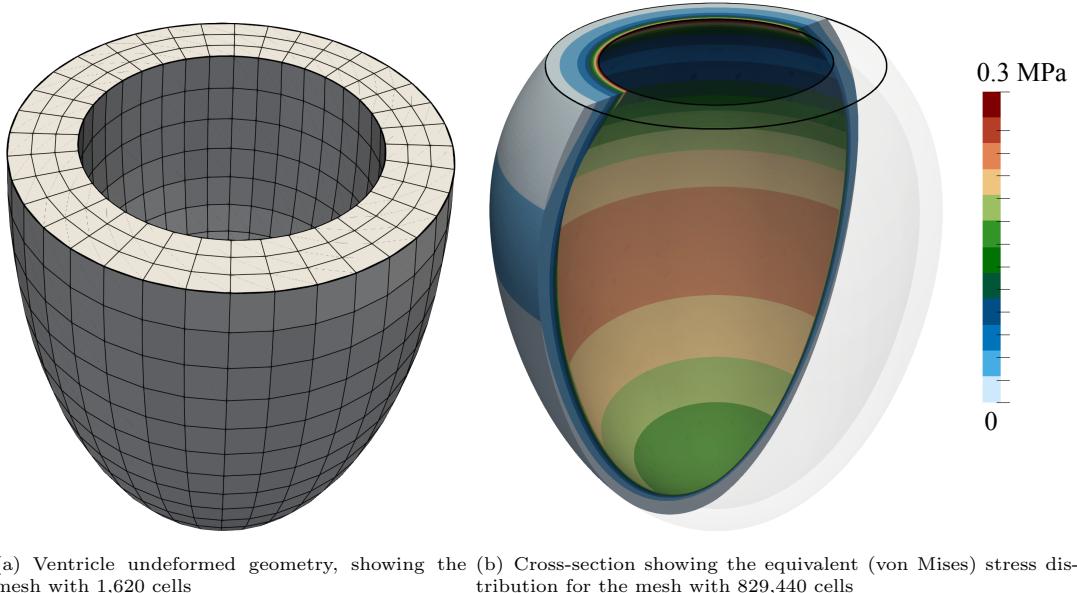


Fig. 9 Idealised ventricle case

The equivalent (von Mises) stress at full inflation is shown for the mesh with 829,440 cells in Figure 9(b), where the high stresses on the endocardial (inner) surface quickly drop off through the wall thickness as the endocardial (outer) surface is approached. The predicted deformed configuration of the midline of the ventricle wall is shown in Figure 10, where a side-by-side comparison is given with the round-robin benchmark results from Land et al. [20]. The predictions of the current work fall within the ranges of the benchmark. The predictions are seen to become quickly mesh-independent.

Case 5: Cook's membrane

Cook's membrane (Figure 11) is a well-known bending-dominated benchmark case used in linear and non-linear analysis. The current work considers the finite strain elastoplastic version [22]. We could also consider the small-strain elastic version or hyperelastoplastic version. The 2-D tapered panel (trapezoid) is fixed on one side and subjected to uniform shear traction on the opposite side. The prescribed shear traction is $\tau = 0.3125$ MPa. The vertices of the trapezoid (in mm) are (0, 0), (48, 44), (48, 60), and (0, 44). There are no body forces, and the problem is solved as statically as 2-D plane strain. The problem is solved as static, using 30 equally-sized loading increments.

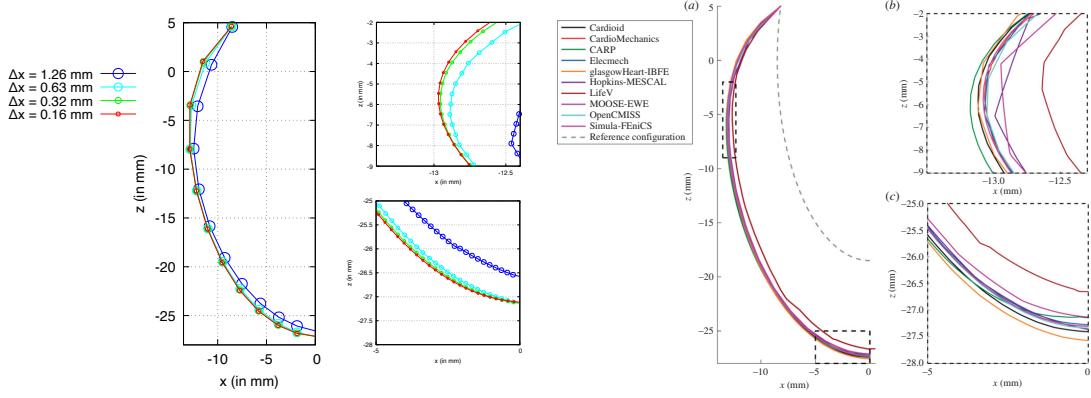


Fig. 10 Idealised ventricle: predictions for the current method (left) vs the round-robin predictions from Land et al. [20]

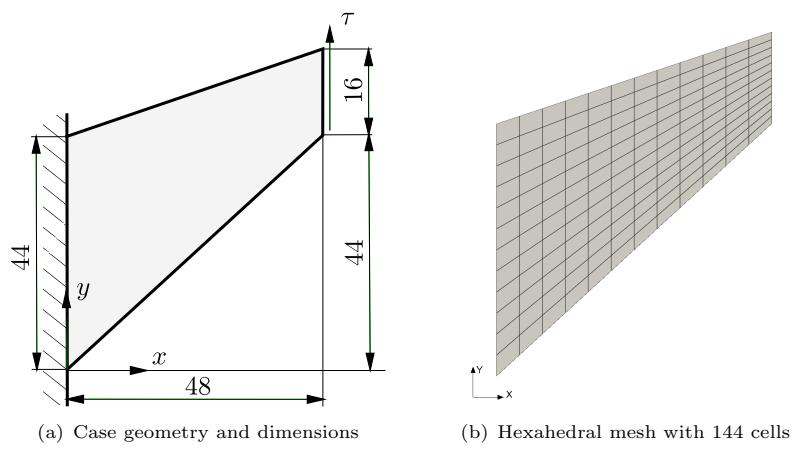


Fig. 11 Cook's membrane.

The Young's modulus $E = 206.9$ MPa and Poisson's ratio $\nu = 0.29$, with the yield stress σ_y given as [22]

$$\sigma_y = \sigma_Y + H\bar{\varepsilon}_p + (\sigma_\infty - \sigma_Y)(1 - e^{-\delta\bar{\varepsilon}_p}) \quad (38)$$

The plastic yielding parameters are $\sigma_Y = 0.45$ MPa, $\sigma_\infty = 0.715$ MPa, $\delta = 16.93$, and $H = 0.12924$ MPa, where the hardening variable $\bar{\varepsilon}_p$ corresponds to equivalent plastic strain.

Case 6: Vibration of a 3-D Cantilevered Beam

This 3-D, dynamic, finite strain case geometry consists of a $2 \times 0.2 \times 0.2$ cuboid column (Figure 12), taken from Tuković and Jasak [23]. A sudden, constant traction $\mathbf{T} = (|\mathbf{T}|/\sqrt{2})(1, 1, 0)$ Pa is applied to the upper surface, where the magnitude $|\mathbf{T}|$ is defined in terms of a dimensionless load factor \mathcal{F} as

$$|\mathbf{T}| = \frac{\mathcal{F}EI}{AL^2} \text{ Pa} \quad (39)$$

In the current study, $\mathcal{F} = 1$. A St. Venant-Kirchoff material is assumed with $E = 15.293 \text{ MPa}$, $\nu = 0.3$ and density $\rho = 1000 \text{ kg m}^{-3}$, while the area $A = (0.2)(0.2) = 0.04 \text{ m}^2$ and the second moment of area $I = 0.0001333 \text{ m}^4$. The geometric and material parameters were chosen for the first natural frequency to be 1 Hz. Four successively refined hexahedral meshes are generated using the OpenFOAM `blockMesh` utility, with cell counts of 270, 2160, 17280 and 138240. The total time period is 10 s, corresponding to 10 expected oscillation periods. A fixed time step size of 0.001617274174 s is chosen, corresponding to a Courant number of six on the mesh with 2160 cells.

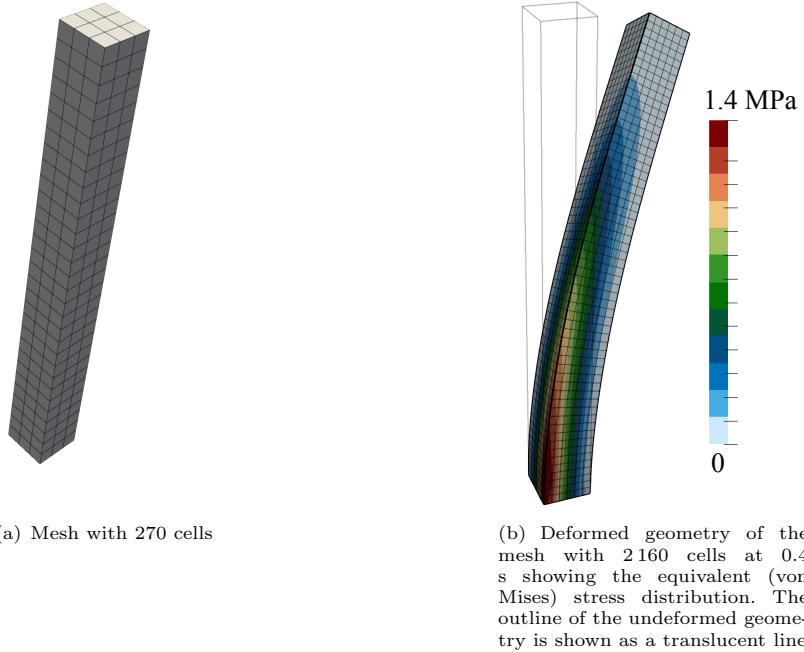


Fig. 12 Vibration of a 3-D Cantilevered Beam case

The equivalent stress distribution in the cantilever at maximum deflection is shown in Figure 12 for the mesh with 2160 cells. Figure 13

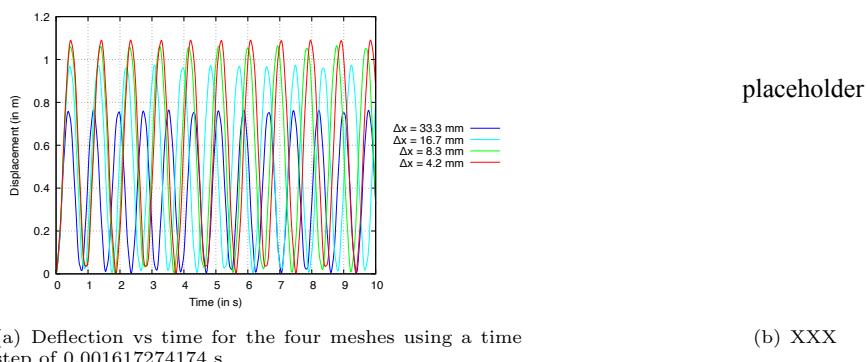


Fig. 13 Vibration of a 3-D Cantilevered Beam case

Case 7: Vibration of an Axial Turbine Blade

This 3-D, dynamic, finite strain case geometry consists of a twisted axial turbine blade, 0.8 m in height, with a cord length of 0.2 m (Figure 14), and is taken from Tuković and Jasak [23]. Zeljko probably has this geometry or a reference for where it came from. The blade is constrained at one end and subjected to a sudden, constant traction of $\mathbf{T} = (\text{ZZZ}, \text{ZZZ}, \text{ZZZ})$ Pa at the other end. A St. Venant-Kirchoff material is assumed with $E = 15.293$ MPa and $\nu = 0.3$, while the area $A = (0.2)(0.2) = 0.04$ m² and the second moment of area $I = 0.0001333$ m⁴. Comment on the meshes A fixed time step size of XXX s is chosen, corresponding to a YY on the coarsest mesh update as required. The total time period is XXX s, corresponding to XX expected oscillation periods. An advantage of this case over the cantilever is that it is complex geometry; a disadvantage is that we do not have a reference solution. A mitigation for this disadvantage is we could run it in Abaqus to provide a credible reference.

placeholder

Fig. 14 Vibration of an axial turbine blade case geometry, mesh and loading conditions

4.2 Time and Memory Requirements

This section presents the time and memory requirements of the proposed Jacobian-free Newton Krylov approach for all six cases described in Section ???. Time and memory requirements from the classic segregated approach are given for comparison, along with the requirements from commercial finite element software Abaqus (version XXX): ask Dylan to create the Abaqus results when we are happy the paper will not change. The finite element approach uses a coupled solution algorithm and direct linear solver, where a Newton-Raphson method is used for resolving nonlinearities. Take care when comparing times between different hardware.

Figure 15 provides a collage of the equivalent (von Mises) stress fields for the six cases.

placeholder

Fig. 15 Collage of the equivalent (von Mises) stress fields for the six cases

Table 1 lists the wall clock times (time according to a clock on the wall) and maximum memory usage according to the GNU time utility. All clock times and memory usage were generated using hardware details using one CPU core. Times and maximum memory usage were recorded using

the GNU time utility. Give details of relevant numerical settings, e.g. linear solver, preconditioner, Rhee-Chow scaling, globalisation strategy if any. Multi-CPU-core parallelisation is examined in Section 4.7.

Case	Number of Cells	Time (in s)	Memory (in MB)
Spherical cavity	1,234	345	1,234
Spherical cavity	12,345	345	1,234
Spherical cavity	123,456	345	1,234
Case 2, etc	123,456	345	1,234
Case 3, etc	123,456	345	1,234
Case 4, etc	123,456	345	1,234

Table 1 Execution times and maximum memory usage speed-up column?

The trends shown in Table 1 are common to all typical modern computer systems, however, the exact values depend on the particular details of the CPU, the memory configuration and the operating system. To highlight the effect of hardware specification, Table 2 lists the time and memory usage for a different system: e.g. Mac M2/M3 seem to give excellent performance vs Meluxina AMD EPYC cores. Describe the difference, e.g. 2-3 faster but same memory usage Additional comments/insights, e.g. time trends are the same for both systems We could even include multiple systems here, e.g. Mac Studio vs Meluxina AMD vs Zagreb Intel workstation vs Intel i9/i7

Hardware	Case	Number of Cells	Time (in s)	Memory (in MB)
Mac Studio, M2 Ultra	Spherical cavity	1,234	345	1,234
Mac Studio, M2 Ultra	Spherical cavity	12,345	345	1,234
Mac Studio, M2 Ultra	Spherical cavity	123,456	345	1,234
Meluxina, AMD EPYC	Spherical cavity	1,234	345	1,234
Meluxina, AMD EPYC	Spherical cavity	12,345	345	1,234
Meluxina, AMD EPYC	Spherical cavity	123,456	345	1,234

Table 2 Execution times and maximum memory usage for Hardware Spec 2

4.3 Effect of Mesh Type

To highlight the effect of mesh type on the performance of the proposed Jacobian-free Newton-Krylov approach, case X is re-examined using several mesh types: (i) structured hexahedral; (ii) structured tetrahedral; (iii) unstructured tetrahedral; and (iv) unstructured polyhedral. The hexahedral and tetrahedral meshes have been generated using the Gmsh utility [15] and the polyhedral mesh has been created by converting a tetrahedral mesh using the OpenFOAM polyDualMesh utility.

Table 3 lists the execution times and total number of linear solver iterations for the different mesh types and densities. Comment on the results: e.g. fastest, slowest, most/least iterations, etc Provide insights, if any: e.g. why is one faster or slower Conclusion: mesh type does or does not affect the performance.

Mesh Type	Number of Cells	Time (in s)	Linear Solver Iterations
Structured hexahedral	1,234	345	1,234
Structured hexahedral	12,345	345	1,234
Structured hexahedral	123,456	345	1,234
Structured tetrahedral	1,234	345	1,234
Structured tetrahedral	12,345	345	1,234
Structured tetrahedral	123,456	345	1,234
Unstructured tetrahedral	1,234	345	1,234
Unstructured tetrahedral	12,345	345	1,234
Unstructured tetrahedral	123,456	345	1,234
Unstructured polyhedral	1,234	345	1,234
Unstructured polyhedral	12,345	345	1,234
Unstructured polyhedral	123,456	345	1,234

Table 3 Execution times on Case X for different mesh types

4.4 Effect of the Preconditioner Choice

A critical factor contributing to the performance of Jacobian-free Newton Krylov methods is the formulation of the linear solver preconditioner and related linear solver settings. In this section, three choices of preconditioner are compared:

- **LU** - A LU decomposition direct solver Is this MUMPS? To be checked. A direct solver is expected to be the more robust but suffer from excessive time and memory requirements for larger numbers of unknowns.
- **ILU(N)** - Incomplete LU decomposition with N fill-in. ILU(N) is expected to have lower memory requirements but at the expense of robustness. Additionally, as the system of unknowns becomes larger, the number of ILU(N) iterations is expected to increase. As the fill-in factor N is increased, the performance of ILU(N) approaches that of the LU direct solver.
- **Algebraic multigrid** - The HYPRE Boomerang parallelised multigrid preconditioner. Multigrid approaches have the potential to offer superior performance than other methods for larger problems, with near linear scaling of time and memory requirement.

An additional consideration when selecting a preconditioner is its ability to scale in parallel as the number of CPU cores increases. From this perspective, the iterative approaches (ILU(N) and multigrid) are expected to show better parallel scaling than direct methods (LU). Analysis of this point is left to Section 4.7.

Table 4 presents the execution times and memory requirements for cases X, Y and Z for different mesh densities. Comment on the results: e.g. fastest, slowest, most/least iterations, etc Provide insights, if any: e.g. why is one faster or slower Conclusion: which preconditioner is 'best' for which situation: probably LU is best for 'small' cases and multigrid for 'large' cases

Other linear solver settings: mention these but no need for analyses

In GMRES, we must choose the value of the "restarts" parameter; the default in PETSc of 30 does not always seem good enough (I have been setting it to 100). We could show its affect on one case. I think the optimal choice is linked with the choice of preconditioner (a better preconditioner means we can use a small restart value) so maybe we include this with the "preconditioner choices" section. I suggest we do not add an analysis of this: instead we can just mention it

Case	Number of Cells	Preconditioner	Time (in s)	Memory (in MB)
Case X	1,234	LU	345	1,234
Case X	12,345	LU	345	1,234
Case X	123,456	LU	345	1,234
Case X	1,234	ILU(0)	345	1,234
Case X	12,345	ILU(0)	345	1,234
Case X	123,456	ILU(0)	345	1,234
Case X	1,234	Multigrid	345	1,234
Case X	12,345	Multigrid	345	1,234
Case X	123,456	Multigrid	345	1,234
Case Y	1,234	LU	345	1,234
Case Z	1,234	LU	345	1,234

Table 4 Execution times and maximum memory usage for different preconditioners on varying cases and mesh densities Try other value of N for ILU?

This can also be considered a linear solver setting. For segregated, we always use a relative tolerance of 0.1, but initial tests for JFNK show that 0.1 is too loose and 1e-3 seems better, although maybe there is no difference with using 1e-6. I suggest we do not add an analysis of this: instead we can just mention it

4.5 Effect of Rhie-Chow Stabilisation

This section highlights a key effect in the performance of the proposed Jacobian-free Newton Krylov method: the choice of the global scaling factor α in the Rhie-Chow stabilisation (Equation 17). Without this (or a similar) stabilisation term, zero-energy oscillations, such as checkerboarding, may appear in the solution fields. As the amount of stabilisation is increased (increasing α), these numerical modes are quelled and the solution is stabilised; however, at some point, further increases in amount of stabilisation reduce the accuracy of the discretisation due to oversmoothing. Consequently, a good choice of the stabilisation global scaling factor α is one which is sufficiently high to quell oscillations but not higher. This challenge is related to the discretisation and hence is common to all solution algorithms, including segregated and Jacobian-free Newton Krylov methods. Nonetheless, the amount of stabilisation can affect the convergence of the linear solver in Jacobian-free Newton Krylov methods, for example, as examined by ?] for a XXX Euler flow finite volume formulation.

Table 5 presents the execution times and total number of linear solver iterations for the case XX for $\alpha = [0.01, 0.1, 1]$ for several mesh densities. Comment on the results: e.g. fastest, slowest, most/least iterations, if any cases diverged or needed a higher 'restarts' value, etc Provide insights, if any: e.g. why is one faster or slower

Case	Number of Cells	α	Time (in s)	Linear Solver Iterations
Idealised Ventricle	1,234	0.01	345	1,234
Idealised Ventricle	12,345	0.1	345	1,234
Idealised Ventricle	123,456	1.0	345	1,234
Axial Turbine	1,234	0.01	diverged	diverged
Axial Turbine	12,345	0.1	345	1,234
Axial Turbine	123,456	1.0	345	1,234

Table 5 Execution times and total linear solver iterations for different values of the Rhie-Chow stabilisation factor α

Figure 16 shows a comparison of the stress (or displacement) along the line XXX -; we need to show the effect on accuracy for different values of alpha

placeholder

Fig. 16 Stress predictions along the line XXX for the YYY case using different values of the Rhie-Chow stabilisation factor α

4.6 Effect of Globalisation Strategies

We already have many section so it may be better to just mention this rather than providing an analysis

4.7 Parallelisation

In this final analysis, the multi-CPU-core parallel scaling performance of the proposed Jacobian-free Newton Krylov method is examined. Two types of parallel scaling analyses are performed [5]:

- Strong scaling study: Strong scaling measures how the execution time of a fixed problem size (fixed number of cells) decreases as the number of CPU cores increases. Good strong scaling indicates that an application effectively utilises additional CPU cores without significant overhead. In contrast, poor strong scaling suggests that adding more cores does not significantly reduce the execution time, often due to increased communication or synchronisation overhead.
- Weak scaling study: Weak scaling measures how the execution time changes as the problem size (the number of cells) and the number of CPU cores increase proportionally, where the problem size per CPU core remains (approximately) constant. Good weak scaling indicates that the application can efficiently manage larger workloads with more cores without a significant increase in execution time. Poor weak scaling implies that the application struggles to maintain performance as the problem size and core count increase.

The results from the strong scaling study are shown in Figure 17. The speedup S is defined as $S = t_1/t_p$, where t_1 is the clock time on one CPU core and t_p is the clock time on P CPU cores. In the ideal case, the speedup should double when the number of cores is doubled. In reality, inter-CPU-core communication reduces the parallel scaling efficiency below the ideal. Comment on the results: e.g. fastest, slowest, most/least iterations, best/worst scaling Provide insights, if any: e.g. why is one faster or slower

The weak scaling results are shown in Figure 18. The weak scaling efficiency η_w is defined as $\eta_w = t^{[w]_1}/t^{[w]_p}$, where $t^{[w]_1}$ is the clock time on one CPU core and $t^{[w]_p}$ is the clock time on P CPU cores where the problem size per CPU core is constant. In the ideal case, the efficiency should be

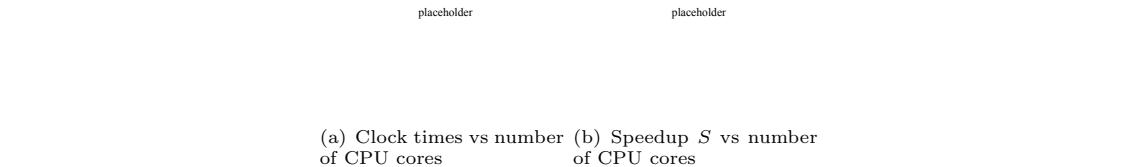


Fig. 17 Strong parallel scaling study comparing the performance of three preconditioning strategies: a LU direct solver, and ILU(N) and multigrid iterative solvers

unity, but inter-CPU-core communication reduces it. **Comment on the results:** e.g. fastest, slowest, most/least iterations, best/worst scaling. **Provide insights, if any:** e.g. why is one faster or slower

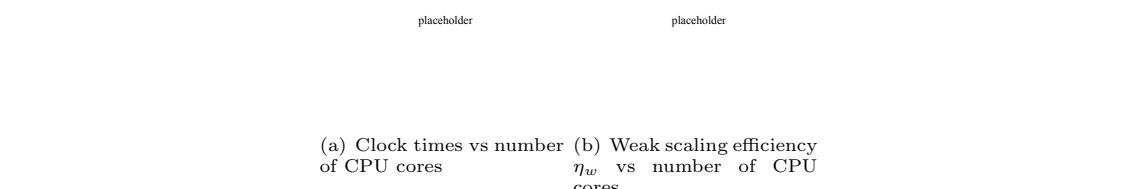


Fig. 18 Weak parallel scaling study comparing the performance of three preconditioning strategies: a LU direct solver, and ILU(N) and multigrid iterative solvers

5 Conclusions

In the current work, a Jacobian-free Newton-Krylov solution algorithm has been proposed for solid mechanics problems discretised using the cell-centred finite volume method. A compact-stencil discretisation of the diffusion term is proposed as the preconditioner matrix, allowing a straightforward extension of existing segregated solution frameworks. The key findings of the work are:

- Main results
- Main important choices
- How it compares to segregated methods and FE (Abaqus)

Acknowledgments. This project has received funding from the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (Grant Agreement No. 101088740). Financial support is gratefully acknowledged from the Irish Research Council through the Laureate programme, grant number IRCLA/2017/45, from Bekaert through the University Technology Centre (UTC phases I and II) at UCD (www.ucd.ie/bekaert), from I-Form, funded by Science Foundation Ireland (SFI) Grant Numbers 16/RC/3872 and RC2302_2, co-funded under European Regional Development Fund and by I-Form industry partners, and from NexSys, funded by SFI Grant Number 21/SPP/3756. Additionally, the authors wish to acknowledge the DJEI/DES/SFI/HEA Irish Centre for High-End Computing (ICHEC) for the provision of

computational facilities and support (www.ichec.ie), and part of this work has been carried out using the UCD ResearchIT Sonic cluster which was funded by UCD IT Services and the UCD Research Office. Ivan/Zeljko: add any additional acknowledgements here

Appendix A Body Force for the Method of Manufactured Solutions Case

The body force for the manufactured solution case is

$$f_b = \begin{cases} \lambda [8a_y\pi^2 \cos(4\pi x) \cos(2\pi y) \sin(\pi z) \\ + 4a_z\pi^2 \cos(4\pi x) \cos(\pi z) \sin(2\pi y) \\ - 16a_x\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ + \mu [8a_y\pi^2 \cos(4\pi x) \cos(2\pi y) \sin(\pi z) \\ + 4a_z\pi^2 \cos(4\pi x) \cos(\pi z) \sin(2\pi y) \\ - 5a_x\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ - 32a_x\mu_\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \\ \\ \lambda [8a_x\pi^2 \cos(4\pi x) \cos(2\pi y) \sin(\pi z) \\ + 2a_z\pi^2 \cos(2\pi y) \cos(\pi z) \sin(4\pi x) \\ - 4a_y\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ + \mu [8a_x\pi^2 \cos(4\pi x) \cos(2\pi y) \sin(\pi z) \\ + 2a_z\pi^2 \cos(2\pi y) \cos(\pi z) \sin(4\pi x) \\ - 17a_y\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ - 8a_y\mu_\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \\ \\ \lambda [4a_x\pi^2 \cos(4\pi x) \cos(\pi z) \sin(2\pi y) \\ + 2a_y\pi^2 \cos(2\pi y) \cos(\pi z) \sin(4\pi x) \\ - a_z\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ + \mu [4a_x\pi^2 \cos(4\pi x) \cos(\pi z) \sin(2\pi y) \\ + 2a_y\pi^2 \cos(2\pi y) \cos(\pi z) \sin(4\pi x) \\ - 20a_z\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z)] \\ - 2a_z\mu_\pi^2 \sin(4\pi x) \sin(2\pi y) \sin(\pi z) \end{cases} \quad (\text{A1})$$

where μ and λ are the first and second Lamé parameters, respectively.

References

- [1] Das, S., Mathur, S.R., Murthy, J.Y.: An Unstructured Finite-Volume Method for Structure–Electrostatics Interactions in MEMS. Numerical Heat Transfer, Part B: Fundamentals **60**(6), 425–451 (2011) <https://doi.org/10.1080/10407790.2011.628252>
- [2] Cardiff, P., Tuković, Ž., Jasak, H., Ivanković, A.: A block-coupled finite volume methodology for linear elasticity and unstructured meshes. Computers & Structures **175**, 100–122 (2016) <https://doi.org/10.1016/j.compstruc.2016.07.004>
- [3] Castrillo, P., Schillaci, E., Rigola, J.: High-order cell-centered finite volume method for solid dynamics on unstructured meshes. Computers & Structures **295**, 107288 (2024) <https://doi.org/10.1016/j.compstruc.2024.107288>

- [4] Nishikawa, H.: A hyperbolic poisson solver for tetrahedral grids. *Journal of Computational Physics* **409**, 109358 (2020) <https://doi.org/10.1016/j.jcp.2020.109358>
- [5] Knoll, D.A., Keyes, D.E.: Jacobian-free newton–krylov methods: a survey of approaches and applications. *Journal of Computational Physics* **193**(2), 357–397 (2004) <https://doi.org/10.1016/j.jcp.2003.08.010>
- [6] Cardiff, P., Tuković, Ž., Jaeger, P.D., Clancy, M., Ivanković, A.: A Lagrangian cell-centred finite volume method for metal forming simulation. *International Journal for Numerical Methods in Engineering* **109**(13), 1777–1803 (2017) <https://doi.org/10.1002/nme.5345> <https://onlinelibrary.wiley.com/doi/pdf/10.1002/nme.5345>
- [7] Batistić, I., Cardiff, P., Tuković, Ž.: A finite volume penalty based segment-to-segment method for frictional contact problems. *Applied Mathematical Modelling* **101**, 673–693 (2022) <https://doi.org/10.1016/j.apm.2021.09.009>
- [8] Tuković, Ivanković, A., Karač, A.: Finite-volume stress analysis in multi-material linear elastic body. *International Journal for Numerical Methods in Engineering* **93**(4), 400–419 (2013) <https://doi.org/10.1002/nme.4390> <https://onlinelibrary.wiley.com/doi/pdf/10.1002/nme.4390>
- [9] Jasak, H., Weller, H.G.: Application of the finite volume method and unstructured meshes to linear elasticity. *International Journal for Numerical Methods in Engineering* **48**(2), 267–287 (2000) [https://doi.org/10.1002/\(SICI\)1097-0207\(20000520\)48:2<267::AID-NME884>3.0.CO;2-Q](https://doi.org/10.1002/(SICI)1097-0207(20000520)48:2<267::AID-NME884>3.0.CO;2-Q) <https://onlinelibrary.wiley.com/doi/pdf/10.1002/%28SICI%291097-0207%2820000520%2948%3A2%3C267%3A%3AAID-NME884%3E3.0.CO%3B2-Q>
- [10] Rhie, C.M., Chow, W.L.: Numerical study of the turbulent flow past an airfoil with trailing edge separation. *AIAA Journal* **21**(11), 1525–1532 (1983) <https://doi.org/10.2514/3.8284> <https://doi.org/10.2514/3.8284>
- [11] Demirdžić, I., Muzaferija, S.: Numerical method for coupled fluid flow, heat transfer and stress analysis using unstructured moving meshes with cells of arbitrary topology. *Computer Methods in Applied Mechanics and Engineering* **125**(1), 235–255 (1995) [https://doi.org/10.1016/0045-7825\(95\)00800-G](https://doi.org/10.1016/0045-7825(95)00800-G)
- [12] Jasak, H.: Error analysis and estimation for the finite volume method with applications to fluid flows. PhD thesis, Imperial College London (University of London) (1996)
- [13] Jsvobs, D.A.H.: A Generalization of the Conjugate-Gradient Method to Solve Complex Systems. *IMA Journal of Numerical Analysis* **6**(4), 447–452 (1986) <https://doi.org/10.1093/imanum/6.4.447> <https://academic.oup.com/imajna/article-pdf/6/4/447/2181350/6-4-447.pdf>
- [14] Balay, S., Abhyankar, S., Adams, M.F., Brown, J., Brune, P., Buschelman, K., Dalcin, L., Eijkhout, V., Gropp, W.D., Kaushik, D., Knepley, M.G., McInnes, L.C., Rupp, K., Smith, B.F., Zampini, S., Zhang, H.: PETSc Web page. <http://www.mcs.anl.gov/petsc> (2015). <http://www.mcs.anl.gov/petsc>

- [15] Geuzaine, C., Remacle, J.-F.: Gmsh: A 3-d finite element mesh generator with built-in pre- and post-processing facilities. International journal for numerical methods in engineering **79**(11), 1309–1331 (2009) <https://doi.org/10.1002/nme.2579>
- [16] Southwell, R.V., Gough, H.J.: Vi. on the concentration of stress in the neighbourhood of a small spherical flaw; and on the propagation of fatigue fractures in “statistically isotropic” materials. The London, Edinburgh, and Dublin Philosophical Magazine and Journal of Science **1**(1), 71–97 (1926) <https://doi.org/10.1080/14786442608633614> <https://doi.org/10.1080/14786442608633614>
- [17] Hitchings, D., Davies, G.A.O., Kamoulakos, A.: Linear Static Benchmarks. International Association for the Engineering Analysis Community & National Agency for Finite Element Methods & Standards (NAFEMS), Glasgow, UK (1987)
- [18] Demirdžić, I., Muzaferija, S., Perić, M.: Advances in computation of heat transfer, fluid flow, and solid body deformation using finite volume approaches. In: W. J. Minkowycz, E.M.S. (ed.) Advances in Numerical Heat Transfer, Chapter 2, pp. 59–96. Taylor & Francis, ??? (1997)
- [19] Cardiff, P., Tuković, Jasak, H., Ivanković, A.: A block-coupled finite volume methodology for linear elasticity and unstructured meshes. Computers & Structures **175**, 100–122 (2016) <https://doi.org/10.1016/j.compstruc.2016.07.004>
- [20] Land, S., Gurev, V., Arens, S., Augustin, C.M., Baron, L., Blake, R., Bradley, C., Castro, S., Crozier, A., Favino, M., Fastl, T.E., Fritz, T., Gao, H., Gizzi, A., Griffith, B.E., Hurtado, D.E., Krause, R., Luo, X., Nash, M.P., Pezzuto, S., Plank, G., Rossi, S., Ruprecht, D., Seemann, G., Smith, N.P., Sundnes, J., Rice, J.J., Trayanova, N., Wang, D., Wang, Z.J., Niederer, S.A.: Verification of cardiac mechanics software: benchmark problems and solutions for testing active and passive material behaviour **471**(2184), 20150641 (2015) <https://doi.org/10.1098/rspa.2015.0641>
- [21] Guccione, J.M., Costa, K.D., McCulloch, A.D.: Finite element stress analysis of left ventricular mechanics in the beating dog heart. Journal of Biomechanics **28**(10), 1167–1177 (1995) [https://doi.org/10.1016/0021-9290\(94\)00174-3](https://doi.org/10.1016/0021-9290(94)00174-3)
- [22] Simo, J.C., Armero, F.: Geometrically non-linear enhanced strain mixed methods and the method of incompatible modes. International Journal for Numerical Methods in Engineering **33**(7), 1413–1449 (1992) <https://doi.org/10.1002/nme.1620330705> <https://onlinelibrary.wiley.com/doi/pdf/10.1002/nme.1620330705>
- [23] Tuković, Ž., Jasak, H.: Updated lagrangian finite volume solver for large deformation dynamic response of elastic body. Transactions of FAMENA **31**(1), 55–70 (2007)