

The optimal-transport cartogram: world population as a Brenier map

Philipp Bogdan

Department of Computing, Imperial College London

`philipp.bogdan24@imperial.ac.uk`

September 2026

Abstract

A contiguous cartogram is a map whose area is proportional to a quantity such as population. The defining condition, that the Jacobian determinant of the deformation equals the density, is one equation for two unknown functions, so every cartogram method adds a tie-breaker, usually implicitly. Optimal transport makes the tie-breaker explicit: among all density-equalising maps of the frame onto itself, take the one that moves the population least in the mean-square sense. By Brenier’s theorem that map is the gradient of a convex potential, so it has no local rotation anywhere and cannot fold. We compute this map for the world population of 2025 on a 4096 by 4096 Mercator grid (10 km cells) from the GHS-POP raster, using the fixed-point Monge–Ampère iteration of Benamou, Froese and Oberman with spectral Poisson solves, continuation in the population share and an ocean-only buffer, on a laptop GPU. Against a Gastner–Newman diffusion cartogram of the same density we find the same transport cost to within 0.4 per cent and density errors of a few per cent for both, but a median local rotation of 8.8 degrees for diffusion against 0.01 for transport, and a median anisotropy of 6.30 against 3.93. The construction extends to local refinement, by transporting a city’s 100 m population onto the area measure the global map assigns to it, and to a semi-discrete counterpart: 8,192 Laguerre cells of 1.00 million people each. Code, data provenance and every figure’s inputs are public.

1 Introduction

A cartogram redraws a map so that the area of each part is proportional to a variable, usually population. Tobler traced the computer history of the idea [26]; Dougenik, Chrisman and Niemeyer’s rubber-sheet algorithm [11], Gastner and Newman’s diffusion method [12] and Gastner, Seguy and More’s flow-based method [13] are the standard constructions, and Nusrat and Kobourov survey the field [22]. For a continuous population density ρ on a frame Ω , normalised to mean one, a contiguous cartogram is a map $T : \Omega \rightarrow \Omega$ with $\det DT = \rho$: after the deformation every unit of area holds the same number of people. This is one scalar equation for the two components of T . The diffusion method resolves the ambiguity by following a physical process; the flow-based method integrates a velocity field derived from one Poisson solve; the rubber-sheet method iterates local expansions. None of these states an objective that the final map minimises.

Optimal transport supplies one. Among all maps that push the population measure ρdx forward to the uniform measure on Ω , choose the one minimising the transport cost

$$\int_{\Omega} \rho(x) |T(x) - x|^2 dx.$$

Brenier proved that the minimiser exists, is unique ρ -almost everywhere and is the gradient of a convex function, $T = \nabla\varphi$ [4]; Caffarelli proved that when both densities are bounded away from

zero and infinity on convex domains the map is smooth [7]; Villani’s monograph is the reference [27]. Three properties follow for a cartogram. The Jacobian $DT = D^2\varphi$ is symmetric positive definite, so its polar decomposition has no rotation: every small shape is stretched along two perpendicular axes and never turned. The map is monotone, so it cannot fold. And the total squared displacement of the population is the smallest possible for any map with the same areas.

These properties are known in a neighbouring literature. Mesh adaptation by equidistribution of a monitor function solves the same Monge–Ampère equation, and Budd and Williams [5], Budd, Russell and Walsh [6], Weller and colleagues on the sphere [28] and McRae, Cotter and Budd [18] describe the resulting meshes as the ones closest to the identity, gradients of a scalar potential and immune to tangling. Zhao and colleagues used the same transport map to flatten surfaces with prescribed area [29]. In cartography we have not found a published population cartogram computed as the Brenier map. The flow-based method of Gastner, Seguy and More is described by its authors as a flow whose equations of motion are easier to solve, not as a transport map [13]; Hennig’s gridded population cartograms use diffusion [14]; Sargent’s recent mesh optimisation minimises a shape-distortion cost rather than displacement [23]; Molchanov, Rave and Linsen’s integral-image method targets speed for time-varying data [19]; Choi and Rycroft’s density-equalising maps are diffusion-based [9]. Of the 37 arXiv papers whose metadata mention cartograms as of 12 September 2026, none uses optimal transport [3].

This note makes the construction and measures what it buys. Its contributions are modest and stated plainly: the world population cartogram as a Brenier map at 10 km resolution (Section 2 and Figures 1 and 2); a matched comparison with diffusion on the same density, which shows that the two maps move the population equally far but differ in rotation and shear (Section 3); a local refinement that transports a city’s 100 m population onto the area the global map gives it (Section 2.5 and Figure 5); and the semi-discrete counterpart, a power diagram of humanity (Figure 6). The solver is not new; it is the fixed-point iteration of Benamou, Froese and Oberman [2] with fast Poisson solves, a line that runs from Loeper and Rapetti [17] through Saumier, Agueh and Khoudier [24] to the back-and-forth method of Jacobs and Léger [15].

2 Method

2.1 The population measure

The population raster is GHS-POP R2023A, epoch 2025, at 30 arc seconds, which disaggregates census counts onto satellite-detected built-up area [25]. Counts, never densities, are re-binned exactly onto a $W \times W$ Web-Mercator grid cut at latitude 85.05 degrees, so no area correction is needed anywhere: each cell holds the people whose coordinates fall in it. The frame’s vertical edges are placed at longitude 168 degrees west, in the Bering Strait, so that the Americas lie at the western edge and the Pacific at the eastern edge and no populated land is cut. The density is the count per cell after Gaussian smoothing with $\sigma = 30$ km at the equator (3.1 cells at $W = 4096$), then normalised to mean one. Two constants complete the measure. A floor adds a uniform density equal to a fraction $(1 - s)/s$ of the mean everywhere, where s is the share of the frame’s area that the population itself commands; $s = 0.95$ is the classic five per cent floor. For the pictures we use a second, ocean-only version instead: land keeps $s = 0.999$, and the ocean cells receive one uniform density chosen so that the ocean occupies 20 per cent of the frame after the map. The land metric does not depend on the ocean share; the ocean is a margin that keeps the continents apart, a device every printed cartogram atlas relies on [14].

2.2 The transport map

Write $T(x) = x + \nabla\psi(x)$. The transport condition $\det DT = \rho$ is the Monge–Ampère equation $\det(I + D^2\psi) = \rho$, with the frame mapped onto itself. The walls are realised by even reflection: ρ is extended symmetrically to a torus of twice the side, the periodic problem is solved with the fast Fourier transform, and by symmetry the map preserves the square and its normal displacement vanishes on the walls. In two dimensions $(\Delta\varphi)^2 = |D^2\varphi|^2 + 2\det D^2\varphi$ for $\varphi = |x|^2/2 + \psi$, so the equation is equivalent to $\Delta\varphi = \sqrt{|D^2\varphi|^2 + 2\rho}$. Benamou, Froese and Oberman’s first method iterates this identity: evaluate the right-hand side at the current iterate, solve one Poisson equation for the next [2]. We damp the iteration by one half and keep the best iterate by residual. Two implementation details matter at this size. First, the state is the Fourier transform of the right-hand side $f = \Delta\psi$, never the potential: the Hessian entries are recovered as $D_{ij}\psi = \mathcal{F}^{-1}[(k_i k_j / |k|^2) \mathcal{F}f]$, bounded multipliers applied to an order-one field, so single precision on the GPU loses nothing, whereas differencing a potential of order W^2 pixels squared does. Second, the map is reached by continuation in the share: the problem is solved at $s = 0.95, 0.98, 0.99, 0.995$ and 0.999 in turn, each warm-started from the last, after a coarse-to-fine pass from 512 cells. With the spectral formulation the continuation is insurance rather than a necessity: a direct solve at $s = 0.999$ on a 2048-cell grid converges to a residual of 0.0106 against 0.0059 with continuation, with the same density error, in a quarter of the time; every map reported here used the continuation. The corner mesh of the output is $x + \nabla\psi$ evaluated spectrally at cell centres and averaged to corners. Cells whose signed area is not positive are counted as folds; they are a discretisation failure of the potential’s convexity at the ocean creases, where the map compresses cells far below one pixel, and they are reported, not hidden. For drawing, the displacement is smoothed in folded cells that carry less than a tenth of the mean population; populated folds would be left as they are.

2.3 The diffusion baseline

Our comparison method is our own implementation of Gastner and Newman’s diffusion cartogram [12] on the same grid, walls and density: the heat equation is solved spectrally on the reflected domain, the mesh corners are advected with velocity $-\nabla\rho/\rho$ by fourth-order Runge–Kutta with adaptive steps and a per-step displacement cap, from $t_0 = 0.01$ cells squared until the density is uniform to one part in a thousand. One choice deserves a warning. Starting the flow at $t_0 = 0.5$ cells squared, which is natural when the raster is not pre-smoothed, equalises the density diffused by that amount rather than ρ itself and inflated the density error to about 9 per cent at $W = 1024$ while leaving every other metric unchanged; with the pre-smoothing used here the early start is safe and the error falls to the level of the transport solve. The flow-based method of Gastner, Seguy and More [13] was not benchmarked: its reference implementation is polygon-based, and our own gridded reimplementations did not reproduce the published shape quality, so we do not report it.

2.4 Measurements

All measurements are made on the raw corner mesh with the population per source cell as weight. Density error is the population-weighted distribution of $\log(\rho/A)$ where A is the warped cell area; we report its 5th and 95th percentiles as percentages. Anisotropy is the ratio of the two singular values of the cell Jacobian. Rotation is the angle of the orthogonal factor in the polar decomposition of the same Jacobian, in degrees. Transport cost is the population-weighted mean of $|T(x) - x|^2$ in units of the frame width squared; it is the objective that transport minimises. Shape error is the per-country Procrustes residual, the root-mean-square distance between the warped outline of a country and its best similarity-transformed original, normalised by the

original outline’s root-mean-square radius, averaged over the countries with at least one million people with population weights; the outlines are Natural Earth 1:50m [21]. Folds are cells of non-positive area. Timings are wall-clock seconds for the solve on an Apple M4 Mac mini with 16 GB of memory, PyTorch 2.12 on the Metal backend.

2.5 Local refinement

The global map equalises the smoothed density at 10 km; inside a city it inflates the city as a whole and leaves its blocks unequal. Let Ω_w be a two-degree window around a city and μ its population on the 3 arc-second raster, smoothed at 300 m. The global map T assigns the window an area measure $\nu = (\det DT)^{-1} \circ T^{-1}$ pushed back to Ω_w , that is, the area each source cell already receives. Solve the transport problem on the window from μ to ν : a map $L : \Omega_w \rightarrow \Omega_w$ with $\det DL = \mu/(\nu \circ L)$. Then $T \circ L$ has Jacobian μ on the window, so the city’s blocks get their own areas, and because L maps the window onto itself the image $T(\Omega_w)$ is unchanged and nothing overlaps a neighbour. The same spectral solver takes the non-uniform target, sampling ν at the current map each iteration, with continuation from $\nu^{1/2}$ to ν . The composed map is no longer a Brenier map of μ globally, so the rotation-free property holds only up to the composition; this is a rendering-scale device, not a claim of global optimality. Carroll and Moore nested cartograms by user focus with the diffusion method [8]; nesting by data resolution follows the same idea.

2.6 The semi-discrete counterpart

Replacing the uniform target by N point masses of equal weight gives semi-discrete transport: the population measure is partitioned into N Laguerre cells of exactly equal population, each a convex polygon, the plane itself undeformed [20]. We use pysdot [16] with $N = 8,192$ on a 2048-cell grid, Newton’s method on the weights with continuation in the smoothing of the density from 32 cells to none, because the Newton step needs every cell non-empty at the start. Cohen-Addad, Klein and Young used balanced power diagrams of population for redistricting [10]; here the same object is a picture of the world.

3 Results

Figure 1 is the construction in one pair of pictures: one dot per million people placed on the Mercator frame by systematic sampling of the raster, and the same dots carried by the transport map. The cartogram is the picture in which the dots are uniform. Figure 2 draws coastlines, borders and the 15-degree graticule through the transport map and through the diffusion map of the same density.

Table 1 gives the matched measurements at three grid sizes.

Three things stand out. First, the transport cost is the same. At 4096 cells the diffusion map’s population-weighted mean squared displacement is within 0.4 per cent of the transport map’s, and the population-weighted mean displacement is 0.269 of the frame width for transport and 0.269 for diffusion. The least-movement property of the Brenier map, its defining virtue, is invisible in practice on this problem: the diffusion flow is already nearly optimal in the mean-square sense, because both maps carry the same bulk of population from the continents into the same ocean. Second, both methods equalise the smoothed density to within a few per cent: -2.5 to +2.4 per cent for transport at every grid size, and -3.2 to +3.1 per cent for diffusion at 1024 cells widening to -6.3 to +5.9 per cent at 4096, where the advected mesh accumulates more integration error. The transport solve is a direct fixed point on the potential and its error is set by the residual tolerance and the smoothing, not by the grid. Third, the maps differ in how they

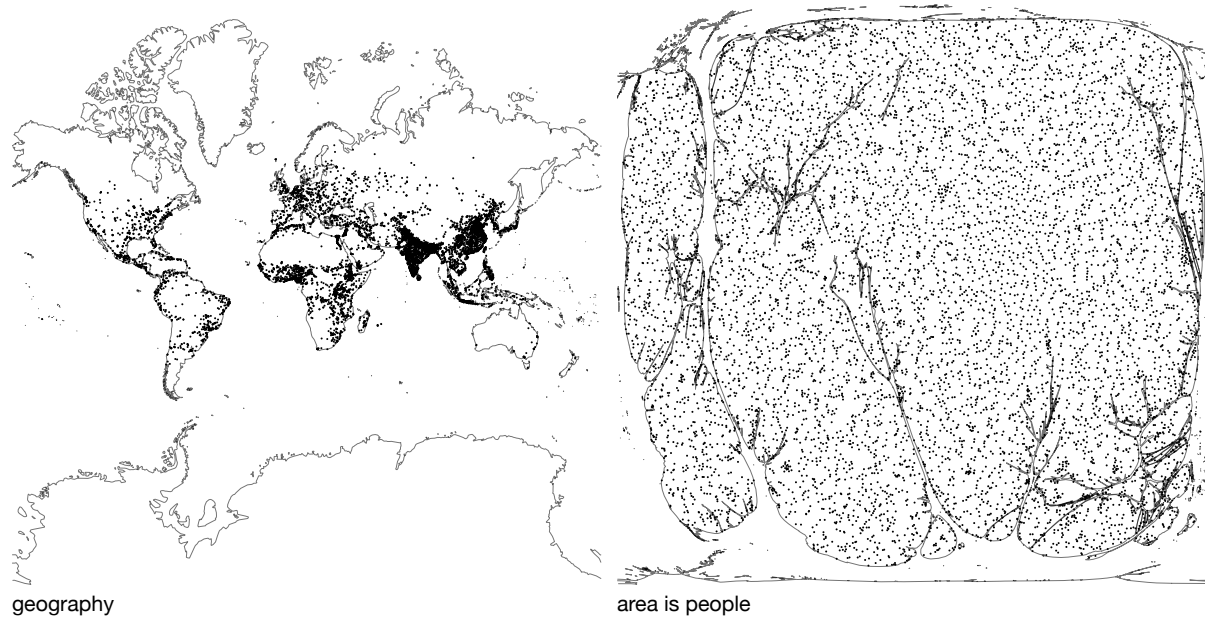


Figure 1: One dot per million people (8,191 dots), placed by systematic sampling of the GHS-POP 2025 raster, on the Mercator frame (left) and under the optimal-transport map with land pure and a 20 per cent ocean margin (right). Coastlines are drawn through the same map.

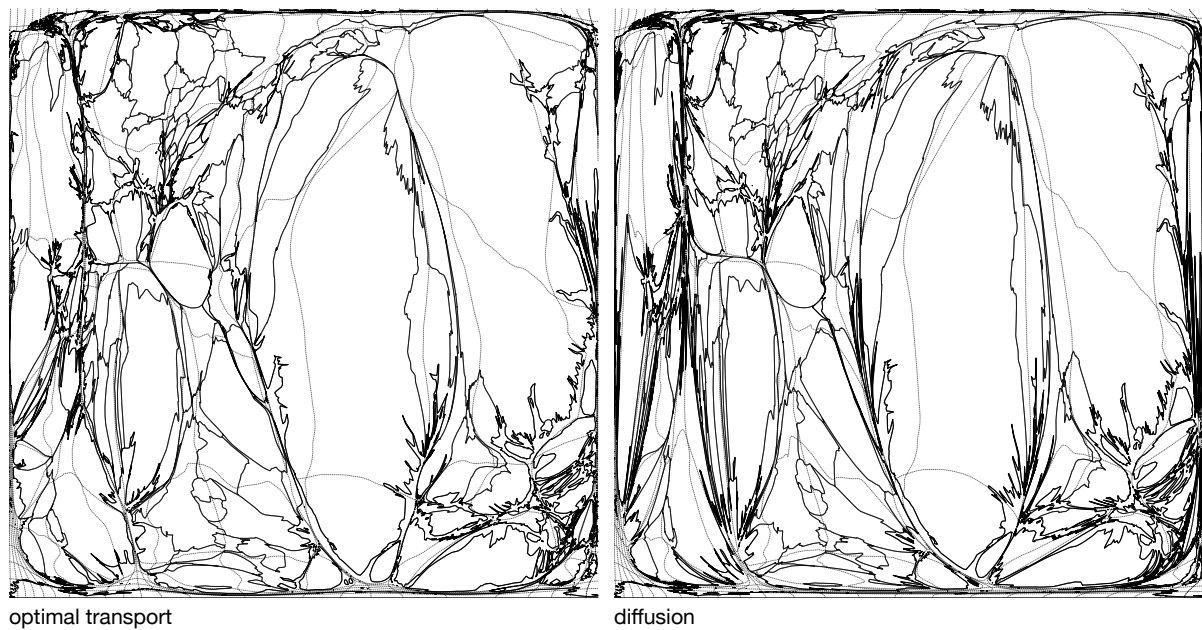


Figure 2: Coastlines, national borders and the 15-degree graticule (dotted) through the transport map (left) and the diffusion map (right) of the same density: GHS-POP 2025 at 4096 cells, 30 km smoothing, a five per cent floor everywhere. Folds in empty cells were smoothed for drawing only.

Table 1: Transport against diffusion on the same density (five per cent floor, smoothing 3 cells: 118 km at 1024, 60 km at 2048, 30 km at 4096). Density error: 5th and 95th population-weighted percentiles of $\rho/A - 1$. Anisotropy and rotation: population-weighted medians and 95th percentiles. Cost: population-weighted mean squared displacement in units of the frame width squared. Shape: population-weighted Procrustes residual over countries. Time: solve on an Apple M4.

grid	method	error p05 / p95 (%)	anisotropy p50 / p95	rotation p50 / p95 (deg)	cost (10^{-3})	shape	time (s)
1024	OT	-2.5 / +2.1	3.65 / 18.9	0.0 / 0.0	81.96	0.753	6
1024	diffusion	-3.2 / +3.1	4.77 / 40.6	7.0 / 25.9	82.23	0.844	4
2048	OT	-2.4 / +2.2	3.81 / 21.9	0.0 / 0.0	82.05	0.773	26
2048	diffusion	-3.7 / +3.6	5.50 / 51.1	8.0 / 30.3	82.34	0.878	19
4096	OT	-2.5 / +2.4	3.93 / 25.1	0.0 / 0.0	81.98	0.785	131
4096	diffusion	-6.3 / +5.9	6.30 / 62.6	8.8 / 33.9	82.33	0.901	123

distort, not in how far they move. The population-weighted median local rotation is 8.8 degrees for diffusion and 34 degrees at the 95th percentile; for transport it is 0.01 and 0.05 degrees, zero up to discretisation. The median anisotropy is 6.30 for diffusion against 3.93 for transport, and the 95th percentile 63 against 25. The Procrustes shape error over countries is 0.901 against 0.785. Figure 3 shows the two effects on Tissot indicatrices, and Figure 4 the full distributions. The differences are consistent across the three grid sizes.

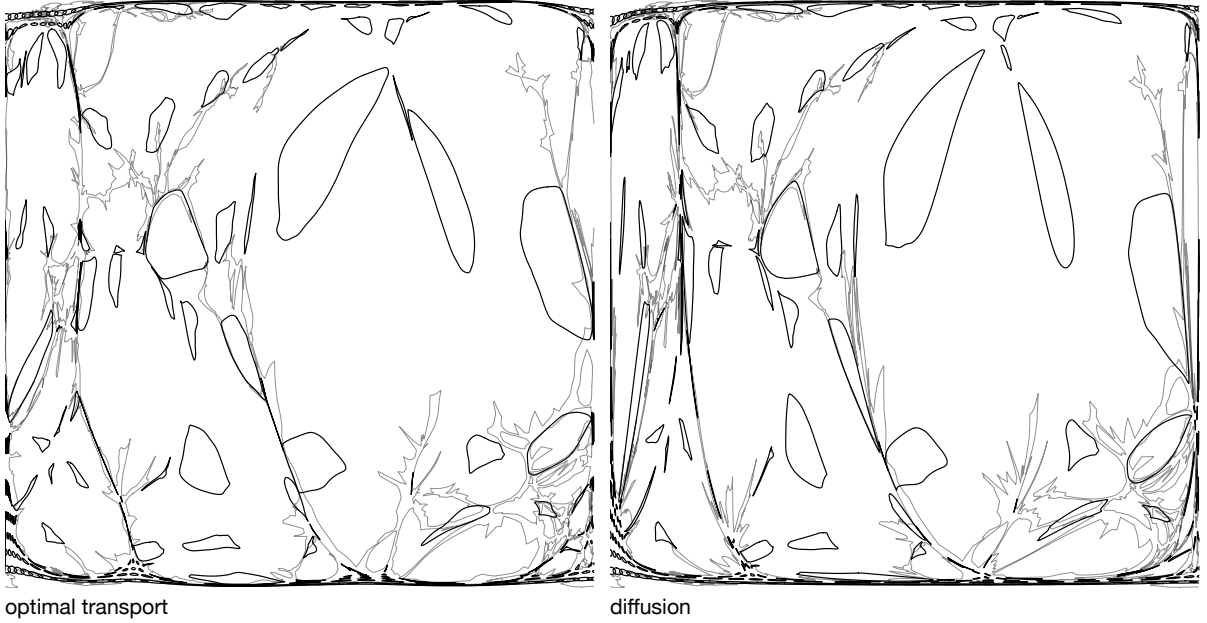


Figure 3: Tissot indicatrices, geodesic circles of radius 300 km on a 15-degree lattice, through the transport map (left) and the diffusion map (right) of the same density. Shear shows as elongation, rotation as the turning of the ellipses' axes away from the graticule.

The picture frame of Figures 1 and 2 was solved with land pure ($s = 0.999$) and the ocean at 20 per cent: density error -2.3 to +2.9 per cent, median anisotropy 4.02, 301,535 folded cells out of 16,777,216, all in the ocean creases, solved in 455 seconds.

The Delhi window (Figure 5), two degrees across with 69.8 million people on the 3 arc-second raster, has a population-weighted density spread at the 300 m scale of a factor 57 between its 5th and 95th percentiles under the global map alone; after the local solve the spread is a factor 2.3, with the window's rim and everything outside it unchanged.

The power diagram of humanity (Figure 6) partitions the same population into 8,192 convex cells of 1.00 million people each; the mass of every cell matches its target to a relative error

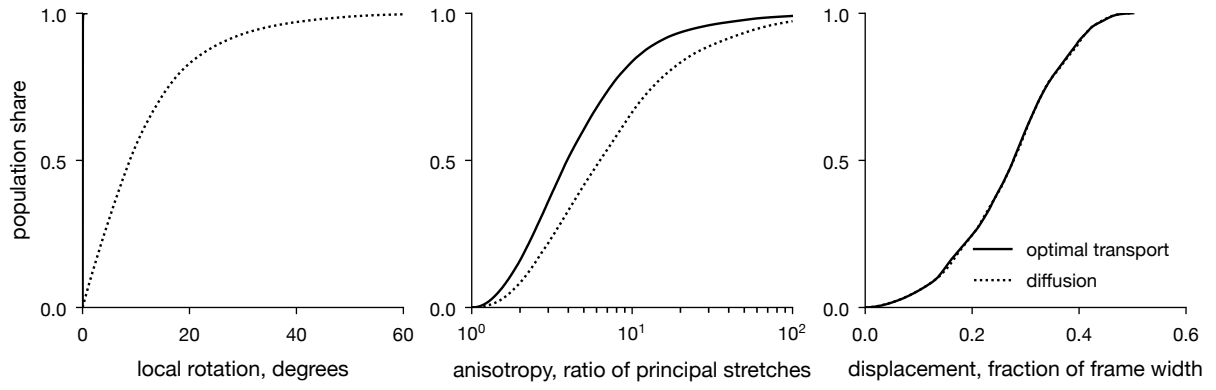


Figure 4: Population-weighted cumulative distributions over source cells at 4096 cells: local rotation angle, anisotropy and displacement, transport (solid) against diffusion (dotted). The displacement curves coincide.

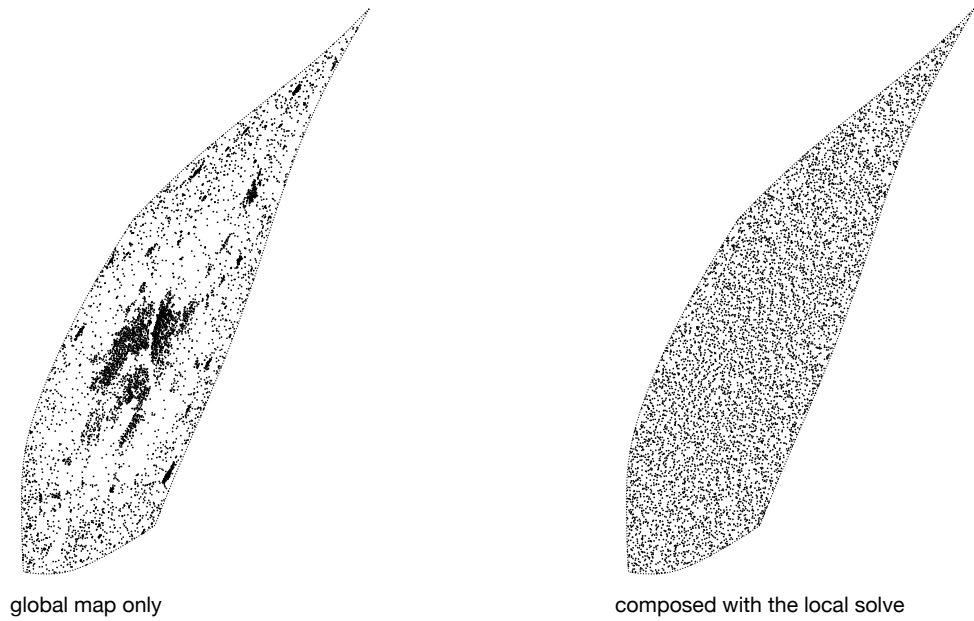


Figure 5: The Delhi window, one dot per ten thousand people on the 3 arc-second raster, under the global 10 km map alone (left) and under the global map composed with the local 300 m transport solve (right). The dotted line is the window's rim, identical in both.

below 10^{-9} .

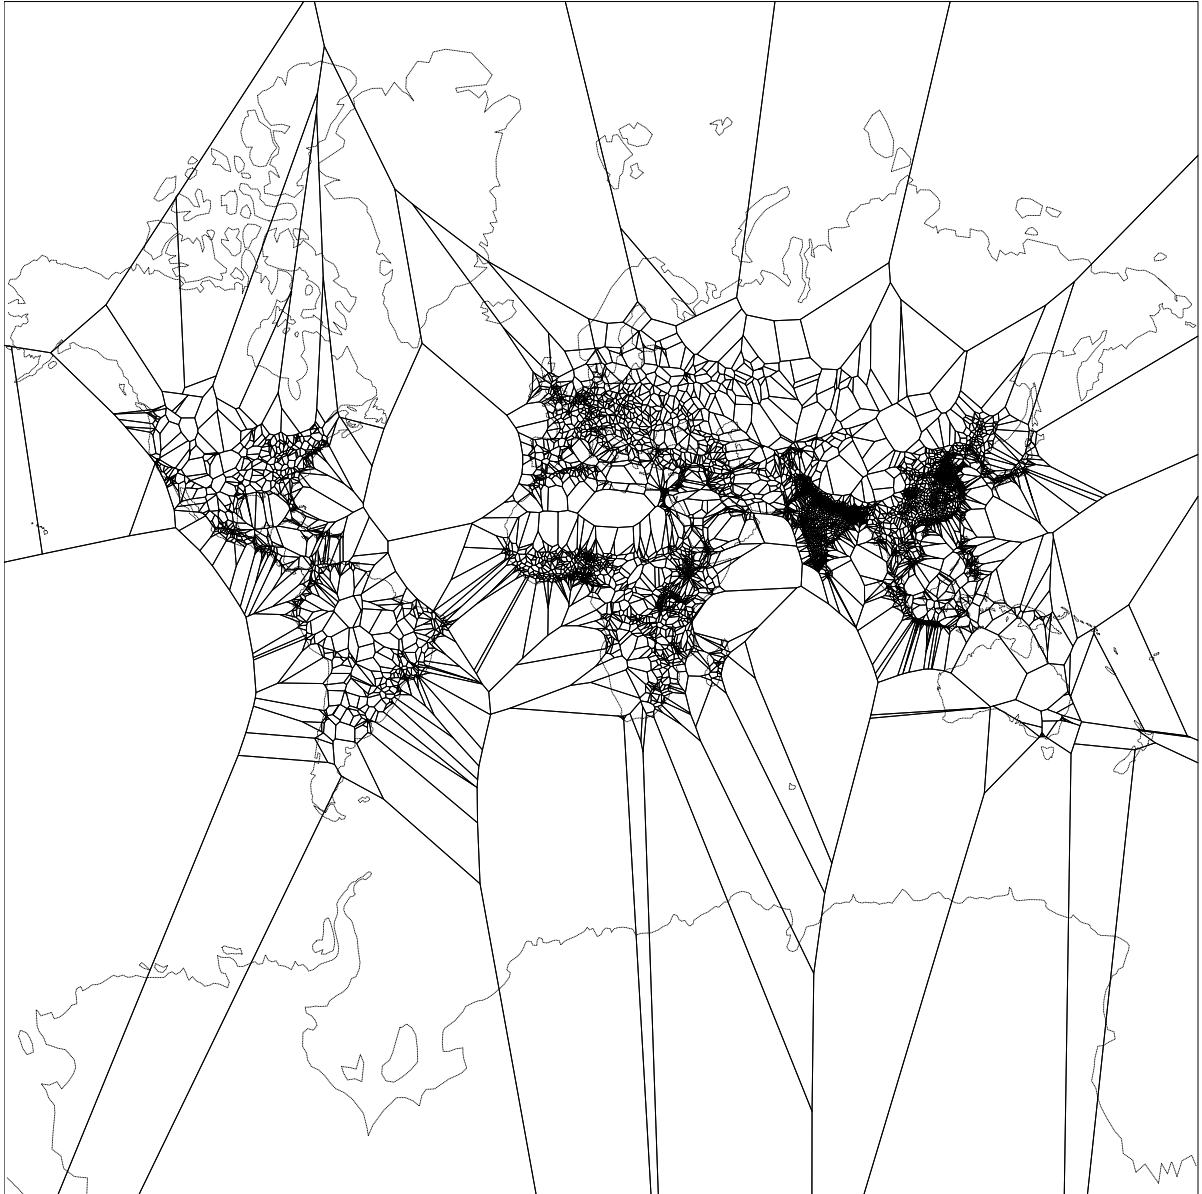


Figure 6: Semi-discrete optimal transport from the population raster to 8,192 sites: every Laguerre cell holds 1.00 million people. The map is not deformed; the cells are. Coastline dotted.

4 Discussion

What the transport map buys is not less movement but no rotation and less shear. The population-weighted transport costs of the two methods agree to well within one per cent, so a reader who wants the Brenier map for its optimality gets nothing visible; a reader who wants coastlines that keep their compass orientation and shapes that are stretched rather than twisted gets a measurable difference, a median rotation of 9 degrees removed and a median anisotropy reduced by about 38 per cent. Whether that difference is worth the fully nonlinear solve is a judgement about the picture, and we have not measured readers.

Several limits bound the claims. The frame is a Mercator square, so the construction is not sphere-native, unlike Weller and colleagues' meshes or Sargent's sphere-optimised cartograms [23, 28]; a periodic equal-area variant of the same solver exists in the repository but is not evaluated

here. The 10 km smoothing sets the sharpness of the global map and the 300 m smoothing that of the window; both are choices. The floor and the ocean share are design parameters, as they are in every method, and the pictures use a different pair from the measurements. Folds remain at the ocean creases on the raw mesh at all sizes and are repaired for drawing only. The comparison is against our own implementation of the diffusion method rather than the authors' code, and the flow-based method is absent. The solver reaches 4096 cells in minutes on a laptop GPU, but Jacobs and Léger report the same grid size in about a minute on a single CPU core with the back-and-forth method [15], so no speed claim is made.

Two observations may be useful beyond this construction. A diffusion start time of half a pixel squared, which is common when a raster is used unsmoothed, silently costs several per cent of density error and should be replaced by pre-smoothing; and the local rotation of a cartogram, which no standard quality measure reports [1, 22], separates the methods more sharply than any area or shape statistic.

Data and code availability

The code, the experiment records with every parameter and metric, the figure scripts with provenance files, and the manuscript source are public in the repository [3]; the population raster is the public GHS-POP R2023A release [25] and the boundaries are Natural Earth [21].

Funding

No funding was received for this work.

Competing interests

The author declares no competing interests.

References

- [1] Md. Jawaherul Alam, Stephen G. Kobourov, and Sankar Veeramoni. Quantitative Measures for Cartogram Generation Techniques. *Computer Graphics Forum*, 34(3):351–360, June 2015. ISSN 1467-8659. doi: 10.1111/cgf.12647. URL <http://dx.doi.org/10.1111/cgf.12647>.
- [2] Jean-David Benamou, Brittany D. Froese, and Adam M. Oberman. Two Numerical Methods for the elliptic Monge-Ampère equation. *ESAIM: Mathematical Modelling and Numerical Analysis*, 44(4):737–758, February 2010. ISSN 1290-3841. doi: 10.1051/m2an/2010017. URL <http://dx.doi.org/10.1051/m2an/2010017>.
- [3] Philipp Bogdan. historical-cartogram: code, experiments and figures for this paper, 2026. URL <https://github.com/philippbogdan/historical-cartogram>.
- [4] Yann Brenier. Polar factorization and monotone rearrangement of vector-valued functions. *Communications on Pure and Applied Mathematics*, 44(4):375–417, June 1991. ISSN 1097-0312. doi: 10.1002/cpa.3160440402. URL <http://dx.doi.org/10.1002/cpa.3160440402>.
- [5] C. J. Budd and J. F. Williams. Moving Mesh Generation Using the Parabolic Monge-Ampère Equation. *SIAM Journal on Scientific Computing*, 31(5):3438–3465, January 2009. ISSN 1095-7197. doi: 10.1137/080716773. URL <http://dx.doi.org/10.1137/080716773>.

- [6] C.J. Budd, R.D. Russell, and E. Walsh. The geometry of r-adaptive meshes generated using optimal transport methods. *Journal of Computational Physics*, 282:113–137, February 2015. ISSN 0021-9991. doi: 10.1016/j.jcp.2014.11.007. URL <http://dx.doi.org/10.1016/j.jcp.2014.11.007>.
- [7] Luis A. Caffarelli. The regularity of mappings with a convex potential. *Journal of the American Mathematical Society*, 5(1):99–104, 1992. ISSN 0894-0347. doi: 10.1090/s0894-0347-1992-1124980-8. URL <http://dx.doi.org/10.1090/s0894-0347-1992-1124980-8>.
- [8] Grant Carroll and Antoni Moore. *A Multi-scale Dynamic Map Using Cartograms to Reflect User Focus*, page 87–112. Springer Berlin Heidelberg, 2008. ISBN 9783540709701. doi: 10.1007/978-3-540-70970-1_5. URL http://dx.doi.org/10.1007/978-3-540-70970-1_5.
- [9] Gary P. T. Choi and Chris H. Rycroft. Density-Equalizing Maps for Simply Connected Open Surfaces. *SIAM Journal on Imaging Sciences*, 11(2):1134–1178, January 2018. ISSN 1936-4954. doi: 10.1137/17m1124796. URL <http://dx.doi.org/10.1137/17m1124796>.
- [10] Vincent Cohen-Addad, Philip N. Klein, and Neal E. Young. Balanced centroidal power diagrams for redistricting. In *Proceedings of the 26th ACM SIGSPATIAL International Conference on Advances in Geographic Information Systems*, SIGSPATIAL ’18, page 389–396. ACM, November 2018. doi: 10.1145/3274895.3274979. URL <http://dx.doi.org/10.1145/3274895.3274979>.
- [11] James A. Dougenik, Nicholas R. Chrisman, and Duane R. Niemeyer. An algorithm to construct continuous area cartograms. *The Professional Geographer*, 37(1):75–81, February 1985. ISSN 1467-9272. doi: 10.1111/j.0033-0124.1985.00075.x. URL <http://dx.doi.org/10.1111/j.0033-0124.1985.00075.x>.
- [12] Michael T. Gastner and M. E. J. Newman. Diffusion-based method for producing density-equalizing maps. *Proceedings of the National Academy of Sciences*, 101(20):7499–7504, May 2004. ISSN 1091-6490. doi: 10.1073/pnas.0400280101. URL <http://dx.doi.org/10.1073/pnas.0400280101>.
- [13] Michael T. Gastner, Vivien Seguy, and Pratyush More. Fast flow-based algorithm for creating density-equalizing map projections. *Proceedings of the National Academy of Sciences*, 115(10), February 2018. ISSN 1091-6490. doi: 10.1073/pnas.1712674115. URL <http://dx.doi.org/10.1073/pnas.1712674115>.
- [14] Benjamin D. Hennig. *Rediscovering the World: Map Transformations of Human and Physical Space*. Springer Berlin Heidelberg, 2013. ISBN 9783642348488. doi: 10.1007/978-3-642-34848-8. URL <http://dx.doi.org/10.1007/978-3-642-34848-8>.
- [15] Matt Jacobs and Flavien Léger. A fast approach to optimal transport: the back-and-forth method. *Numerische Mathematik*, 146(3):513–544, October 2020. ISSN 0945-3245. doi: 10.1007/s00211-020-01154-8. URL <http://dx.doi.org/10.1007/s00211-020-01154-8>.
- [16] Hugo Leclerc and Quentin Mérigot. pysdot: semi-discrete optimal transport in python, 2019. URL <https://github.com/sd-ot/pysdot>. Version 0.2.39. Accessed 2026-09-12.
- [17] Grégoire Loeper and Francesca Rapetti. Numerical solution of the Monge–Ampère equation by a Newton’s algorithm. *Comptes Rendus. Mathématique*, 340(4):319–324, January 2005. ISSN 1778-3569. doi: 10.1016/j.crma.2004.12.018. URL <http://dx.doi.org/10.1016/j.crma.2004.12.018>.

- [18] Andrew T. T. McRae, Colin J. Cotter, and Chris J. Budd. Optimal-Transport-Based Mesh Adaptivity on the Plane and Sphere Using Finite Elements. *SIAM Journal on Scientific Computing*, 40(2):A1121–A1148, January 2018. ISSN 1095-7197. doi: 10.1137/16m1109515. URL <http://dx.doi.org/10.1137/16m1109515>.
- [19] Vladimir Molchanov, Hennes Rave, and Lars Linsen. Fast Time-Varying Contiguous Cartograms Using Integral Images, 2026. URL <https://arxiv.org/abs/2604.13880>.
- [20] Quentin Mérigot. A Multiscale Approach to Optimal Transport. *Computer Graphics Forum*, 30(5):1583–1592, August 2011. ISSN 1467-8659. doi: 10.1111/j.1467-8659.2011.02032.x. URL <http://dx.doi.org/10.1111/j.1467-8659.2011.02032.x>.
- [21] Natural Earth. Natural earth, free vector and raster map data, version 5.1.1, 2022. URL <https://www.naturalearthdata.com/>. Public domain; 1:50m coastline and admin-0 boundaries, 1:110m coastline. Accessed 2026-09-12 via github.com/nvkelso/natural-earth-vector.
- [22] Sabrina Nusrat and Stephen Kobourov. The State of the Art in Cartograms. *Computer Graphics Forum*, 35(3):619–642, June 2016. ISSN 1467-8659. doi: 10.1111/cgf.12932. URL <http://dx.doi.org/10.1111/cgf.12932>.
- [23] Robert C. Sargent. Minimum-distortion continuous cartograms by numerically optimized meshes, 2024. URL <https://arxiv.org/abs/2411.17129>.
- [24] L.-P. Saumier, M. Agueh, and B. Khouider. An efficient numerical algorithm for the L2 optimal transport problem with periodic densities. *IMA Journal of Applied Mathematics*, 80(1):135–157, June 2013. ISSN 1464-3634. doi: 10.1093/imamat/hxt032. URL <http://dx.doi.org/10.1093/imamat/hxt032>.
- [25] Marcello Schiavina, Sergio Freire, and Kytt MacManus. Ghs-pop r2023a - ghs population grid multitemporal (1975-2030), 2023. URL <http://data.europa.eu/89h/2ff68a52-5b5b-4a22-8f40-c41da8332cfe>.
- [26] Waldo Tobler. Thirty Five Years of Computer Cartograms. *Annals of the Association of American Geographers*, 94(1):58–73, March 2004. ISSN 1467-8306. doi: 10.1111/j.1467-8306.2004.09401004.x. URL <http://dx.doi.org/10.1111/j.1467-8306.2004.09401004.x>.
- [27] Cédric Villani. *Optimal Transport*. Springer Berlin Heidelberg, 2009. ISBN 9783540710509. doi: 10.1007/978-3-540-71050-9. URL <http://dx.doi.org/10.1007/978-3-540-71050-9>.
- [28] Hilary Weller, Philip Browne, Chris Budd, and Mike Cullen. Mesh adaptation on the sphere using optimal transport and the numerical solution of a Monge–Ampère type equation. *Journal of Computational Physics*, 308:102–123, March 2016. ISSN 0021-9991. doi: 10.1016/j.jcp.2015.12.018. URL <http://dx.doi.org/10.1016/j.jcp.2015.12.018>.
- [29] Xin Zhao, Zhengyu Su, Xianfeng David Gu, Arie Kaufman, Jian Sun, Jie Gao, and Feng Luo. Area-Preservation Mapping using Optimal Mass Transport. *IEEE Transactions on Visualization and Computer Graphics*, 19(12):2838–2847, December 2013. ISSN 1077-2626. doi: 10.1109/tvcg.2013.135. URL <http://dx.doi.org/10.1109/TVCG.2013.135>.