


MANUFACTURING DRAWING - M42x0.75 FLANGE

TITLE: M42x0.75 FLANGE	
DWG NO: NX300-T2-FLANGE-001	
DRAWN BY: philippoertle	REV: A DATE: 2026-05-09

TOP VIEW

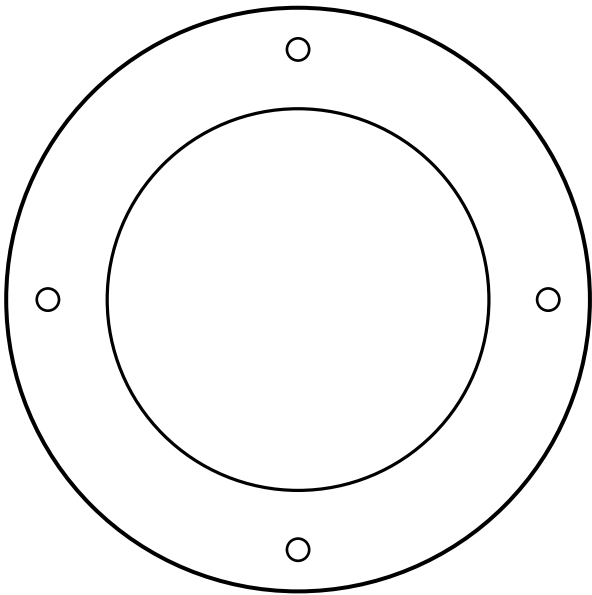

SECTION A-A



PART: M42x0.75 FLANGE (REPLICA-STYLE, OPEN CAD)
UNITS: mm
MATERIAL: 6061-T6 ALUMINUM (or equivalent)
FINISH: DEBURR, BLACK ANODIZE OPTIONAL

- CRITICAL DIMENSIONS:
- OD: 63.00
 - THICKNESS: 5.00
 - CENTER BORE PRE-TAP: 41.20 (THREAD AFTER MACHINING)
 - INTERNAL THREAD: M42x0.75 THROUGH
 - REGISTER: 45.00 DIA x 1.00 DEEP (BACK SIDE)
 - 4X MOUNTING HOLES: 2.40 DIA ON 54.00 BCD
 - 4X COUNTERBORE: 4.80 DIA x 1.60 DEEP (TOP SIDE)

GENERAL TOLERANCE (UNLESS NOTED): +/-0.10 mm
THREAD TOLERANCE: STANDARD INTERNAL METRIC FOR MATING T2 COMPONENTS

- QUOTE / RFQ NOTES (FOR SUPPLIER):
- 1) MACHINE INTERNAL THREAD M42x0.75 THROUGH (THREAD MILL OR TAP)
 - 2) MAINTAIN COAXIALITY OF THREADED BORE TO OD <= 0.05 mm TIR (TARGET)
 - 3) BREAK SHARP EDGES 0.2-0.5 mm
 - 4) NO BURRS ALLOWED IN THREAD START/EXIT
 - 5) INSPECTION REPORT: CRITICAL DIMS + THREAD GO/NO-GO CHECK
 - 6) DO NOT SUBSTITUTE THREAD PITCH