


Single Full Follow-up Lever

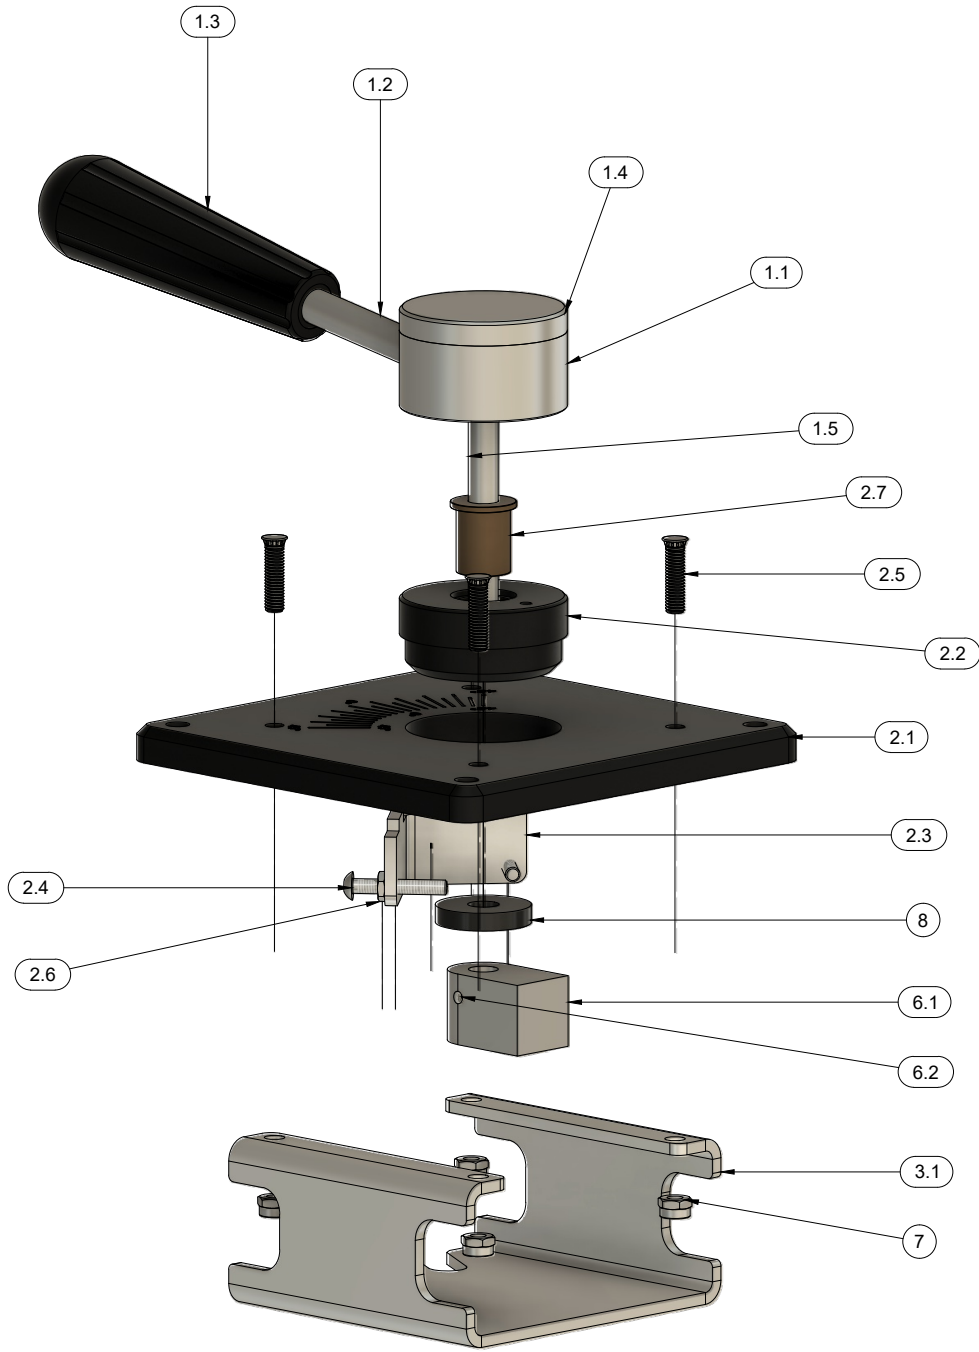


ISO EXP
Single Full Follow-up Lever
Scale = Perspective


A

A

A

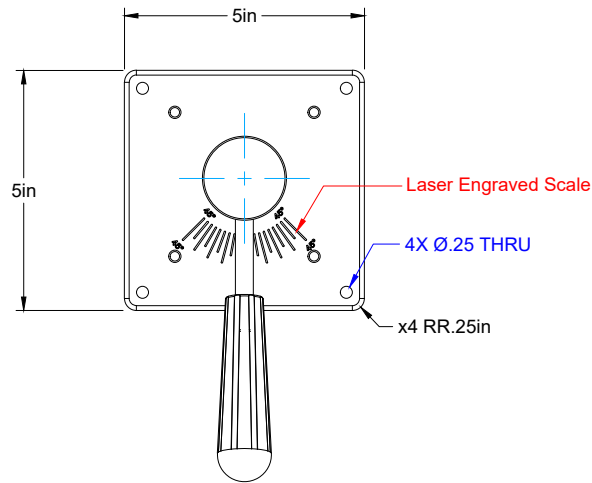

Top View
Single Full Follow-up Lever
Scale = 1:4

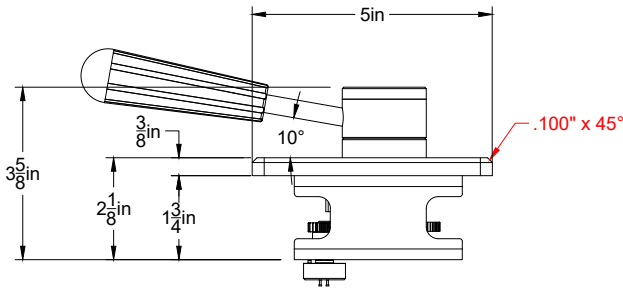

Side View
Single Full Follow-up Lever
Scale = 1:4

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	1	Steering Assembly	----	----
1.1	1	Linkage	Rod - 2in L = 1 3/4in 316 Stainless Steel	Stainless Steel AISI 304
1.2	1	8384K55	Stainless Steel Lever Shaft with 1-4 -20 Thread	Stainless Steel
1.3	1	57455K71 Handle	High-Temperature, with 1/4"-20 Size 1/2" Deep Thread, 3-7/8" Long	Plastic, Opaque Black
1.4	1	Top Cap	----	Stainless Steel AISI 304
1.5	1	8934K271	304 Stainless Steel Rod 5/16" Diameter	Stainless Steel
1.6	3	85015A332	18-8 Stainless Steel Slotted Ball-Nose Spring Plunger with 440C Stainless Steel Nose, M5x0.8, 3.4-5 lb. Nose Force	Stainless Steel
2	1	Housing Assembly	Main Housing Asseambly	----
2.1	1	TP (x1) .375 Alum	.375 Alum Top Panel	Aluminum 6061
2.2	1	Sleeve	1 7/8 in Alum Rod Rough Stock	Aluminum 6061
2.3	1	Stop Plate (x1) .125 Alum	.125 Alum Stop Plate	Aluminum 5052 H32
2.4	2	92095A197	18-8 Stainless Steel Button Head Hex-Drive Screw M4 x 0.7 mm Thread Size, 25 mm Long	Stainless Steel 304, Plain
2.5	4	93580A606	Press-Fit Stud Zinc-Plated Steel, M5 x 0.8 mm Thread, PEM Fh-M5-20	Steel
2.6	2	91828A231	Corrosion-Resistant 18-8 Stainless Steel Hex Nut M4 x 0.7 mm Thread Size	Stainless Steel A2, Plain
2.7	1	6338K456	Oil-Embedded Flanged Sleeve Bearing for 5/16" Shaft Diameter and 9/16" Housing ID, 3/4" Long	841 Bearing Bronze
3	1	Base Plate Assembly	Single Follow Up Lever - Steering Base Plate Assembly	Aluminum 5052 H32
3.1	1	BH (x1) .125 Alum Rev.A	.125 Alum Base Housing	Aluminum 5052 H32
6	1	Stop Block Assembly	----	Stainless Steel AISI 304
6.1	1	Stop Block	3/4 in Stainless Stop Block	Stainless Steel AISI 304
6.2	1	92125A194	M4 x 0.7 mm Thread Size, 16 mm Long	Stainless Steel 304, Plain
7	4	93625A200	18-8 Stainless Steel Nylon-Insert Locknut M5 x 0.8 mm Thread, 8 mm Wide, 5 mm High	Stainless Steel A2, Plain
8	1	8541K23	Nylon Friction Washer 5/16 ID x 1 in OD	Nylon, Black

HJM
MACHINE

PROJECT
TITLE
Single Full Follow-up Lever

Standard Dims & Tolerances:

- All dimensions are in inches [mm], unless otherwise noted.
- **Break all sharp edges** .010-.030 in Unless otherwise specified.
- **Remove burrs and slag.**
- **Unless otherwise noted,** parts to be delivered as-fabricated.
- **Remove sharp edges & burrs.**
- Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

Weldments

- Welds per AWS D1.1 (unless otherwise specified)
- Fillet weld size ± 1/16 in
- Weld length ± 1/8 in
- Distortion: hold overall dimensions to ± 1/16 in unless otherwise noted

Machining (CNC / Manual)

- Unless noted, ± 0.005 in
- Concentricity ± 0.003 in
- Flatness/parallelism ± 0.003 in per 12 in length
- Surface finish: 125 µin RMS unless otherwise noted

Linear Dimensions


- 1 place decimal (X.X) ± 0.1 in
- 2 place decimal (X.XX) ± 0.01 in
- 3 place decimal (X.XXX) ± 0.005 in
- Angles ± 0.5°

These drawings are the property of **HJM MACHINE**. They are not to be used for any purpose without the approval of **HJM** and are to be returned upon request.


DRAWN BY:	Philip Hull
DATE:	4/6/2026
REV	A
SHEET	
1/7	

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	TP (X1) .375 ALUM MOUNTING HOLES MOVED, BH (X1) .125 ALUM ADDED ACCESS FOR MOUNTING, FRICTION WASHER MATERIAL REVIDED TO BLACK NYLON.	6/16/2026	PRH

Single Full Follow-up Lever
Steering Assembly

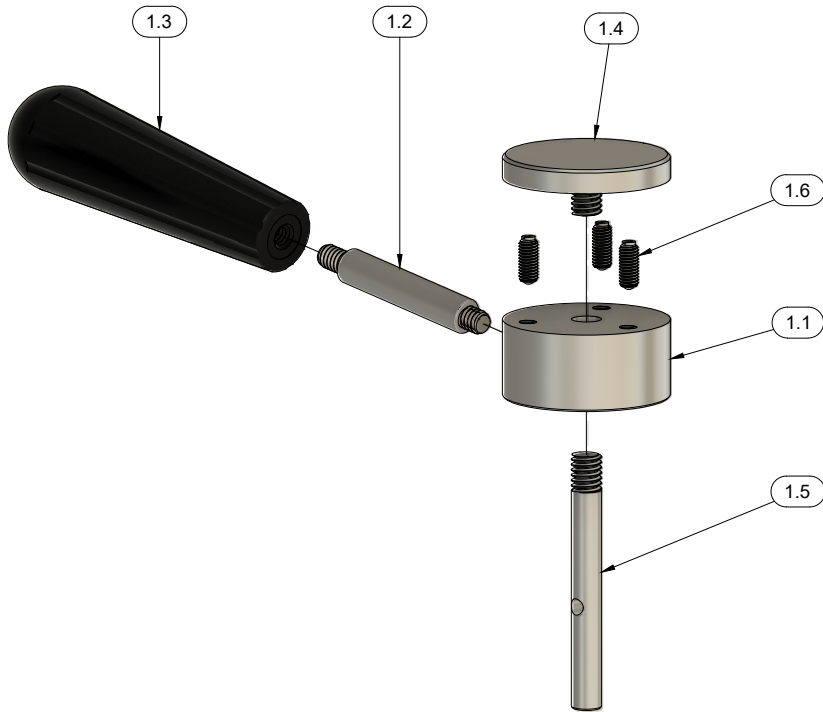


EXP ISO
Steering Assembly
Scale = Perspective

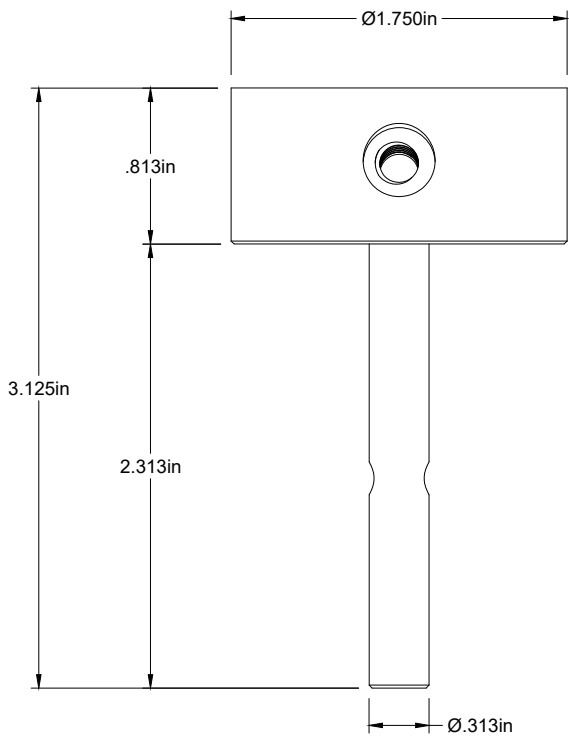


Front View
Steering Assembly
Scale = 1:1


Process Note:
After fitting 8934K271 into linkage, drill Ø0.172" (11/64") hole. Locate hole 90° offset from the angled 1/4"-20 hole in the linkage.

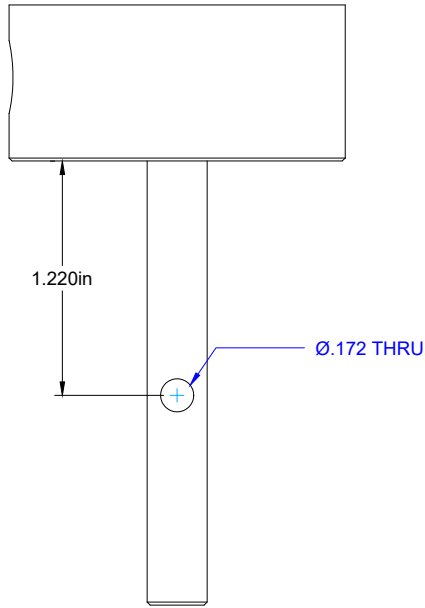


Right View
Steering Assembly
Scale = 1:1

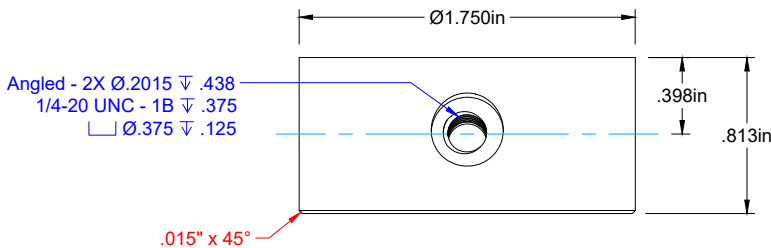


Front View
Linkage
Scale = 1:1

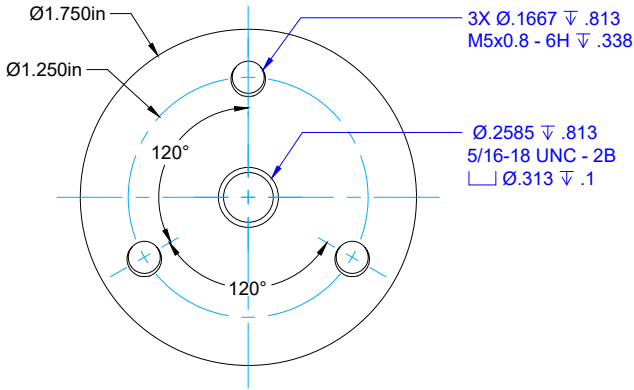


Top View
Linkage
Scale = 1:1

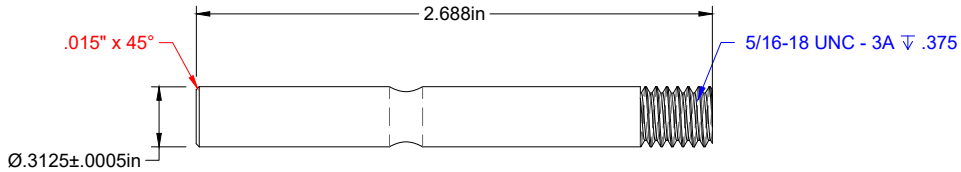

Front View
8934K271 - 304 Stainless Steel Rod 5/16" Diameter
Scale = 1:1

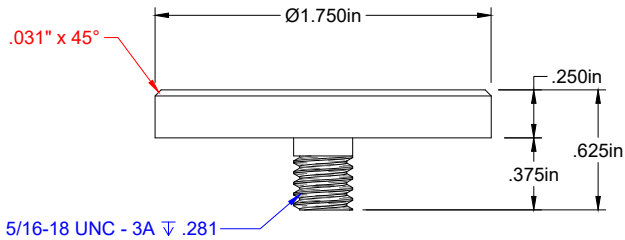

Front View
Top Cap
Scale = 1:1

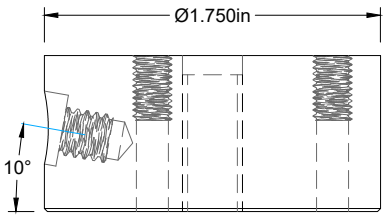

Right View
Linkage
Scale = 1:1

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
1	1	Steering Assembly	----	----
1.1	1	Linkage	Rod - 2in L = 1 3/4in 316 Stainless Steel	Stainless Steel AISI 304
1.2	1	8384K55	Stainless Steel Lever Shaft with 1-4 -20 Thread	Stainless Steel
1.3	1	57455K71 Handle	High-Temperature, with 1/4"-20 Size 1/2" Deep Thread, 3-7/8" Long	Plastic, Opaque Black
1.4	1	Top Cap	----	Stainless Steel AISI 304
1.5	1	8934K271	304 Stainless Steel Rod 5/16" Diameter	Stainless Steel
1.6	3	85015A332	18-8 Stainless Steel Slotted Ball-Nose Spring Plunger with 440C Stainless Steel Nose, M5x0.8, 3.4-5 lb. Nose Force	Stainless Steel
7	4	93625A200	18-8 Stainless Steel Nylon-Insert Locknut M5 x 0.8 mm Thread, 8 mm Wide, 5 mm High	Stainless Steel A2, Plain

HJM
MACHINE

PROJECT

TITLE

Single Full Follow-up Lever

Standard Dims & Tolerances:

- All dimensions are in inches [mm], unless otherwise noted.
- Break all sharp edges .010–.030 in Unless otherwise specified.
- Remove burrs and slag.
- Unless otherwise noted, parts to be delivered as-fabricated.
- Remove sharp edges & burrs.
- Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

Weldments

- Welds per AWS D1.1 (unless otherwise specified)
- Fillet weld size ± 1/16 in
- Weld length ± 1/8 in
- Distortion: hold overall dimensions to ± 1/16 in unless otherwise noted

Machining (CNC / Manual)

- Unless noted, ± 0.005 in
- Concentricity ± 0.003 in
- Flatness/parallelism ± 0.003 in per 12 in length
- Surface finish: 125 µin RMS unless otherwise noted

Linear Dimensions

- 1 place decimal (X.X) ± 0.1 in
- 2 place decimal (X.XX) ± 0.01 in
- 3 place decimal (X.XXX) ± 0.005 in
- Angles ± 0.5°

These drawings are the property of HJM MACHINE. They are not to be used for any purpose without the approval of HJM and are to be returned upon request.

DRAWN BY:

Philip Hull

DATE:

4/6/2026


REV

A


SHEET

2/7


Single Full Follow-up Lever
Housing Assembly

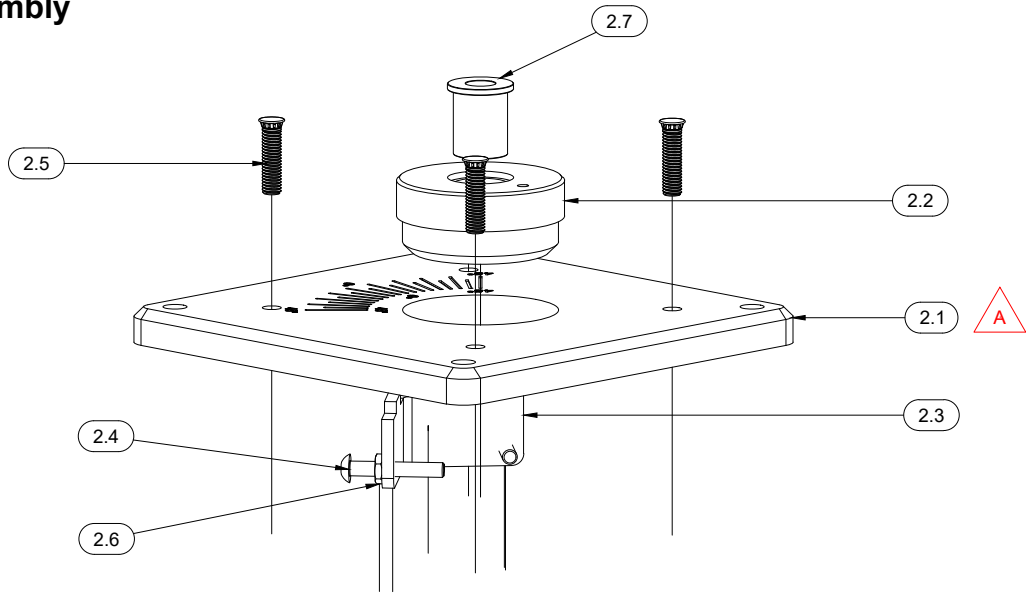


EXP ISO
Housing Assembly
Scale = Perspective

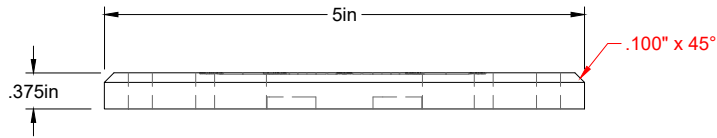


Front View
TP (x1) .375 Alum
Scale = 1:2

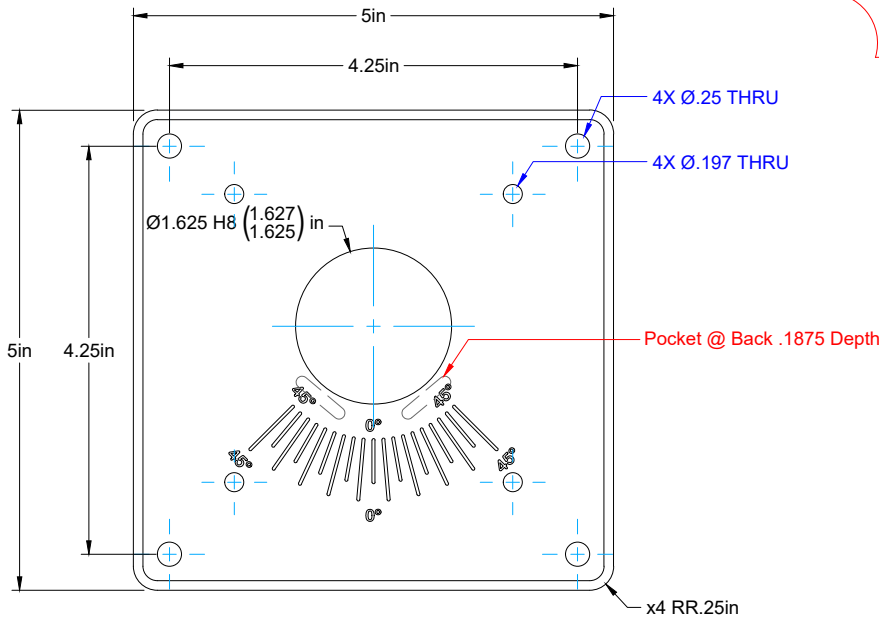


Top View
TP (x1) .375 Alum
Scale = 1:2

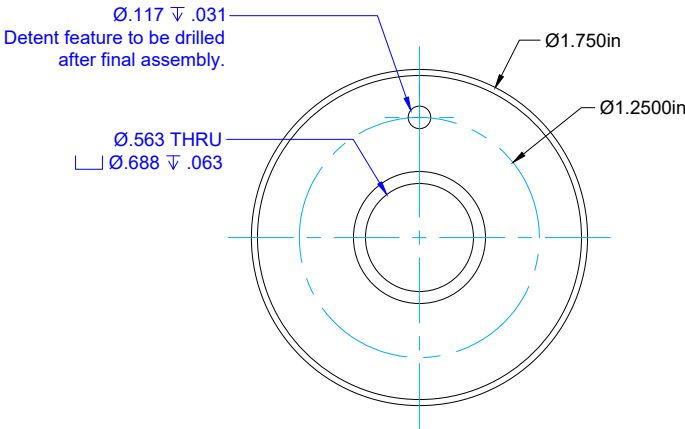


Top View
Sleeve- 1 7/8 in Alum Rod Rough Stock
Scale = 1:1

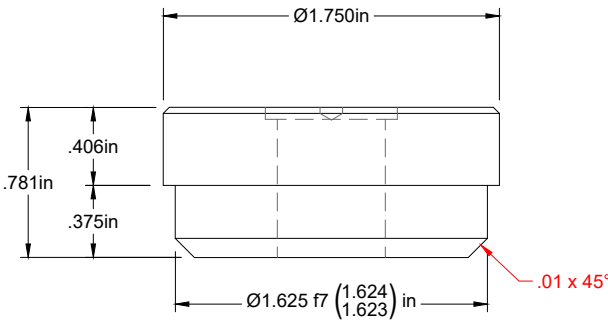

Front View
Sleeve- 1 7/8 in Alum Rod Rough Stock
Scale = 1:1

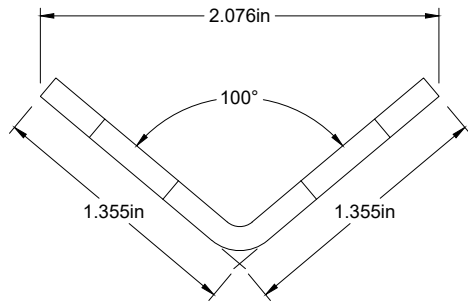

Top View
Stop Plate (x1) .125 Alum
Scale = 1:1

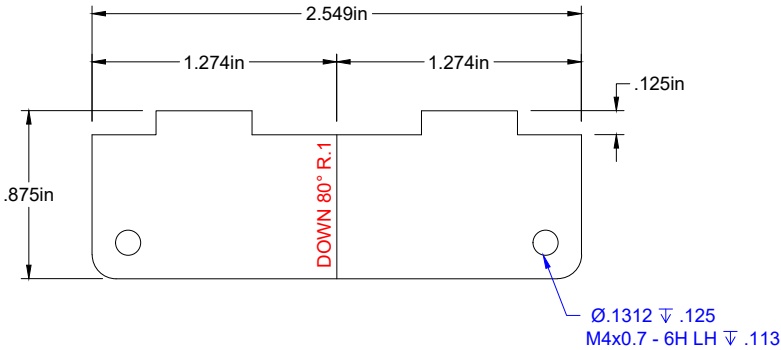

Flat Pattern
Stop Plate (x1) .125 Alum
Scale = 1:1

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
2	1	Housing Assembly	Main Housing Asseamby	----
2.1	1	TP (x1) .375 Alum	.375 Alum Top Panel	Aluminum 6061
2.2	1	Sleeve	1 7/8 in Alum Rod Rough Stock	Aluminum 6061
2.3	1	Stop Plate (x1) .125 Alum	.125 Alum Stop Plate	Aluminum 5052 H32
2.4	2	92095A197	18-8 Stainless Steel Button Head Hex-Drive Screw M4 x 0.7 mm Thread Size, 25 mm Long	Stainless Steel 304, Plain
2.5	4	93580A606	Press-Fit Stud Zinc-Plated Steel, M5 x 0.8 mm Thread, PEM Fh-M5-20	Steel
2.6	2	91828A231	Corrosion-Resistant 18-8 Stainless Steel Hex Nut M4 x 0.7 mm Thread Size	Stainless Steel A2, Plain
2.7	1	6338K456	Oil-Embedded Flanged Sleeve Bearing for 5/16" Shaft Diameter and 9/16" Housing ID, 3/4" Long	841 Bearing Bronze

HJM
MACHINE

PROJECT
TITLE
Single Full Follow-up Lever

Standard Dims & Tolerances:

- All dimensions are in inches [mm], unless otherwise noted.
- **Break all sharp edges** .010–.030 in Unless otherwise specified.
- **Remove burrs and slag.**
- **Unless otherwise noted,** parts to be delivered as-fabricated.
- **Remove sharp edges & burrs.**
- Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

Weldments

- Welds per AWS D1.1 (unless otherwise specified)
- Fillet weld size ± 1/16 in
- Weld length ± 1/8 in
- Distortion: hold overall dimensions to ± 1/16 in unless otherwise noted

Machining (CNC / Manual)

- Unless noted, ± 0.005 in
- Concentricity ± 0.003 in
- Flatness/parallelism ± 0.003 in per 12 in length
- Surface finish: 125 µin RMS unless otherwise noted

Linear Dimensions

- 1 place decimal (X.X) ± 0.1 in
- 2 place decimal (X.XX) ± 0.01 in
- 3 place decimal (X.XXX) ± 0.005 in
- Angles ± 0.5°

These drawings are the property of **HJM MACHINE**. They are not to be used for any purpose without the approval of **HJM** and are to be returned upon request.

DRAWN BY: Philip Hull

DATE: 4/6/2026

REV: A

SHEET

3/7

Single Full Follow-up Lever
Housing Assembly


PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
2	1	Housing Assembly	Main Housing Asseambly	----
2.1	1	TP (x1) .375 Alum	.375 Alum Top Panel	Aluminum 6061
2.2	1	Sleeve	1 7/8 in Alum Rod Rough Stock	Aluminum 6061
2.3	1	Stop Plate (x1) .125 Alum	.125 Alum Stop Plate	Aluminum 5052 H32
2.5	4	93580A606	Press-Fit Stud Zinc-Plated Steel, M5 x 0.8 mm Thread, PEM Fh-M5-20	Steel
2.7	1	6338K456	Oil-Embedded Flanged Sleeve Bearing for 5/16" Shaft Diameter and 9/16" Housing ID, 3/4" Long	841 Bearing Bronze

HJM
MACHINE


PROJECT

TITLE


Single Full Follow-up Lever

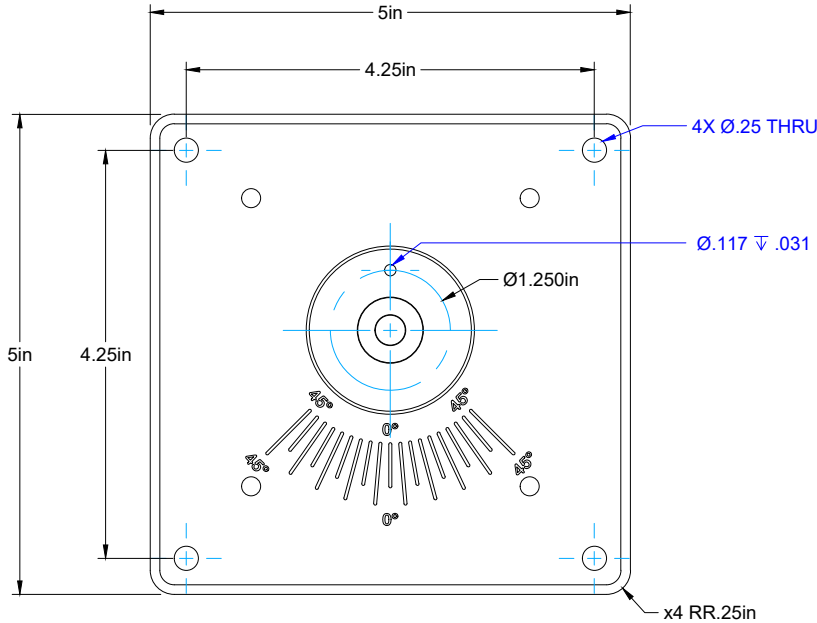

Top View
Housing Assembly
Scale = 1:2

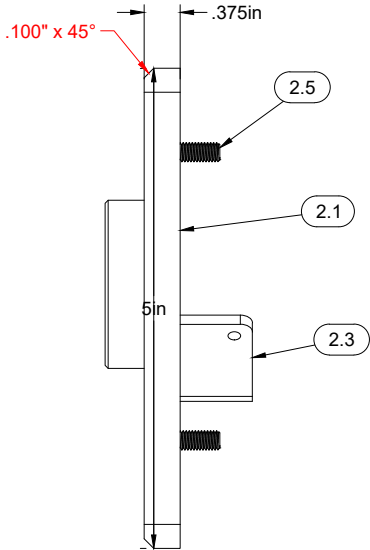

Right View
Housing Assembly
Scale = 1:2

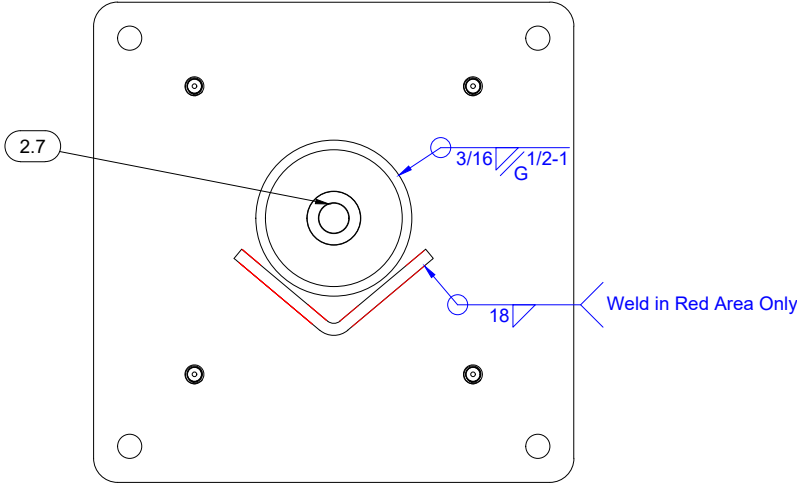

Back View
Housing Assembly
Scale = 1:2

- Standard Dims & Tolerances:**
- All dimensions are in inches [mm], unless otherwise noted.
 - **Break all sharp edges .010–.030 in** Unless otherwise specified.
 - **Remove burrs and slag.**
 - **Unless otherwise noted,** parts to be delivered as-fabricated.
 - **Remove sharp edges & burrs.**
 - Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

- Weldments**
- Welds per AWS D1.1 (unless otherwise specified)
 - Fillet weld size $\pm 1/16$ in
 - Weld length $\pm 1/8$ in
 - Distortion: hold overall dimensions to $\pm 1/16$ in unless otherwise noted

- Machining (CNC / Manual)**
- Unless noted, ± 0.005 in
 - Concentricity ± 0.003 in
 - Flatness/parallelism ± 0.003 in per 12 in length
 - Surface finish: 125 μ in RMS unless otherwise noted

- Linear Dimensions**
- 1 place decimal (X.X) ± 0.1 in
 - 2 place decimal (X.XX) ± 0.01 in
 - 3 place decimal (X.XXX) ± 0.005 in
 - Angles $\pm 0.5^\circ$

These drawings are the property of **HJM MACHINE**. They are not to be used for any purpose without the approval of **HJM** and are to be returned upon request.

DRAWN BY: Philip Hull
DATE: 4/6/2026

REV A


SHEET

4/7


Single Full Follow-up Lever

Stop Block Assembly


PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
6	1	Stop Block Assembly	----	Stainless Steel AISI 304
6.1	1	Stop Block	3/4 in Stainless Stop Block	Stainless Steel AISI 304
6.2	1	92125A194	M4 x 0.7 mm Thread Size, 16 mm Long	Stainless Steel 304, Plain

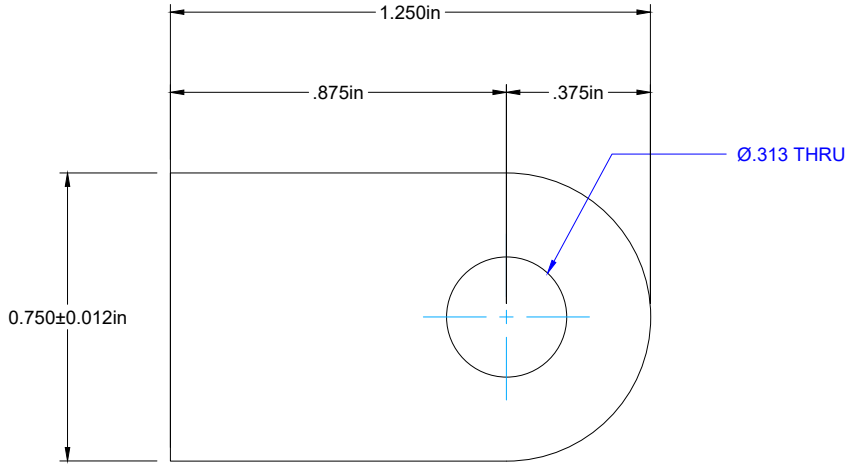

Top View
Stop Block
Scale = 2:1

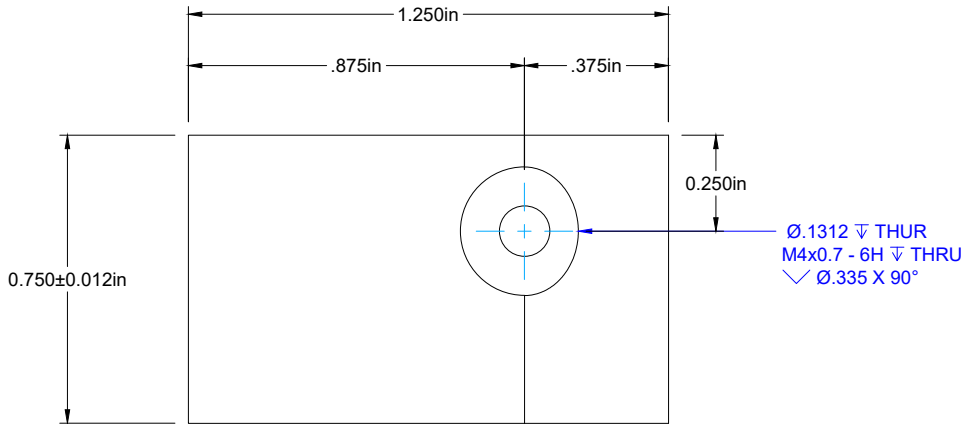

Front View
Stop Block
Scale = 2:1

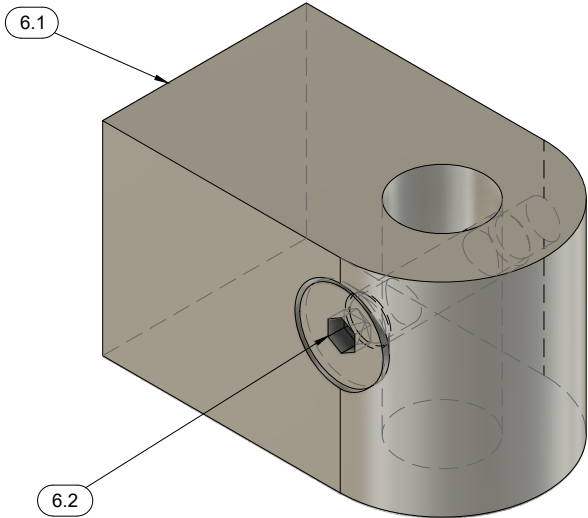

ISO View
Stop Block Assembly
Scale = Perspective

PROJECT	Single Full Follow-up Lever
TITLE	Single Full Follow-up Lever

- Standard Dims & Tolerances:**
- All dimensions are in inches [mm], unless otherwise noted.
 - **Break all sharp edges .010–.030 in** Unless otherwise specified.
 - **Remove burrs and slag.**
 - **Unless otherwise noted,** parts to be delivered as-fabricated.
 - **Remove sharp edges & burrs.**
 - Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

- Weldments**
- Welds per AWS D1.1 (unless otherwise specified)
 - Fillet weld size ± 1/16 in
 - Weld length ± 1/8 in
 - Distortion: hold overall dimensions to ± 1/16 in unless otherwise noted

- Machining (CNC / Manual)**
- Unless noted, ± 0.005 in
 - Concentricity ± 0.003 in
 - Flatness/parallelism ± 0.003 in per 12 in length
 - Surface finish: 125 µin RMS unless otherwise noted

- Linear Dimensions**
- 1 place decimal (X.X) ± 0.1 in
 - 2 place decimal (X.XX) ± 0.01 in
 - 3 place decimal (X.XXX) ± 0.005 in
 - Angles ± 0.5°


These drawings are the property of **HJM MACHINE**. They are not to be used for any purpose without the approval of **HJM** and are to be returned upon request.

DRAWN BY:	Philip Hull
DATE:	4/6/2026
REV	A
SHEET	
5/7	


Single Full Follow-up Lever
Base Plate Assembly

PARTS LIST			
ITEM	QTY	PART NUMBER	MATERIAL
3	1	Base Plate Assembly	Aluminum 5052 H32
3.1	1	BH (x1) .125 Alum Rev.A	Aluminum 5052 H32


HJM
MACHINE

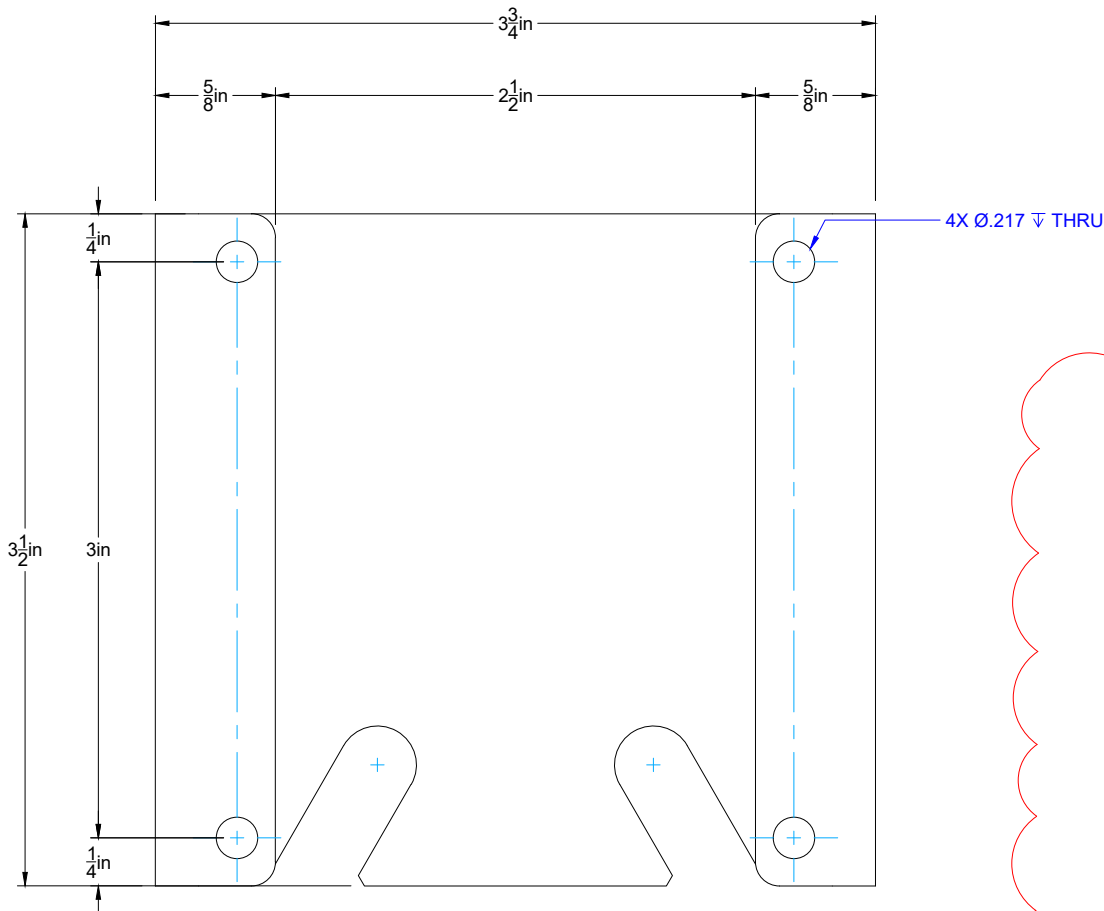

Top View
Base Plate Assembly
Scale = 1:1

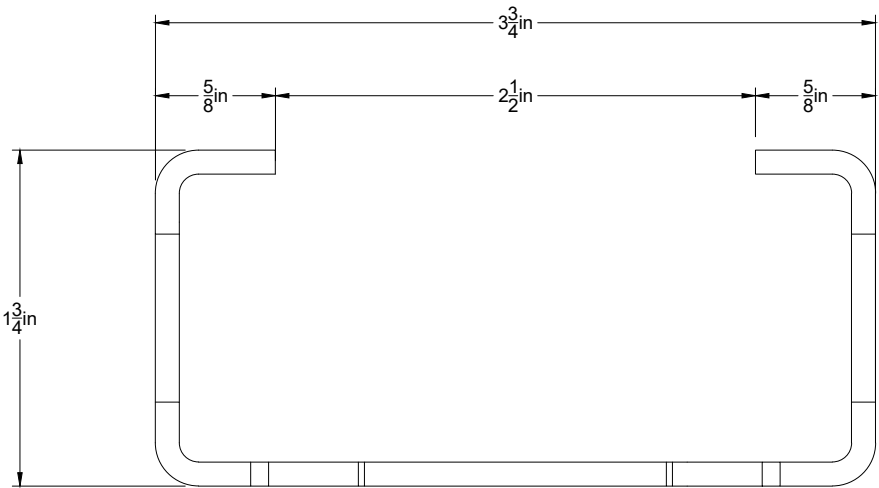

Front View
Base Plate Assembly
Scale = 1:1

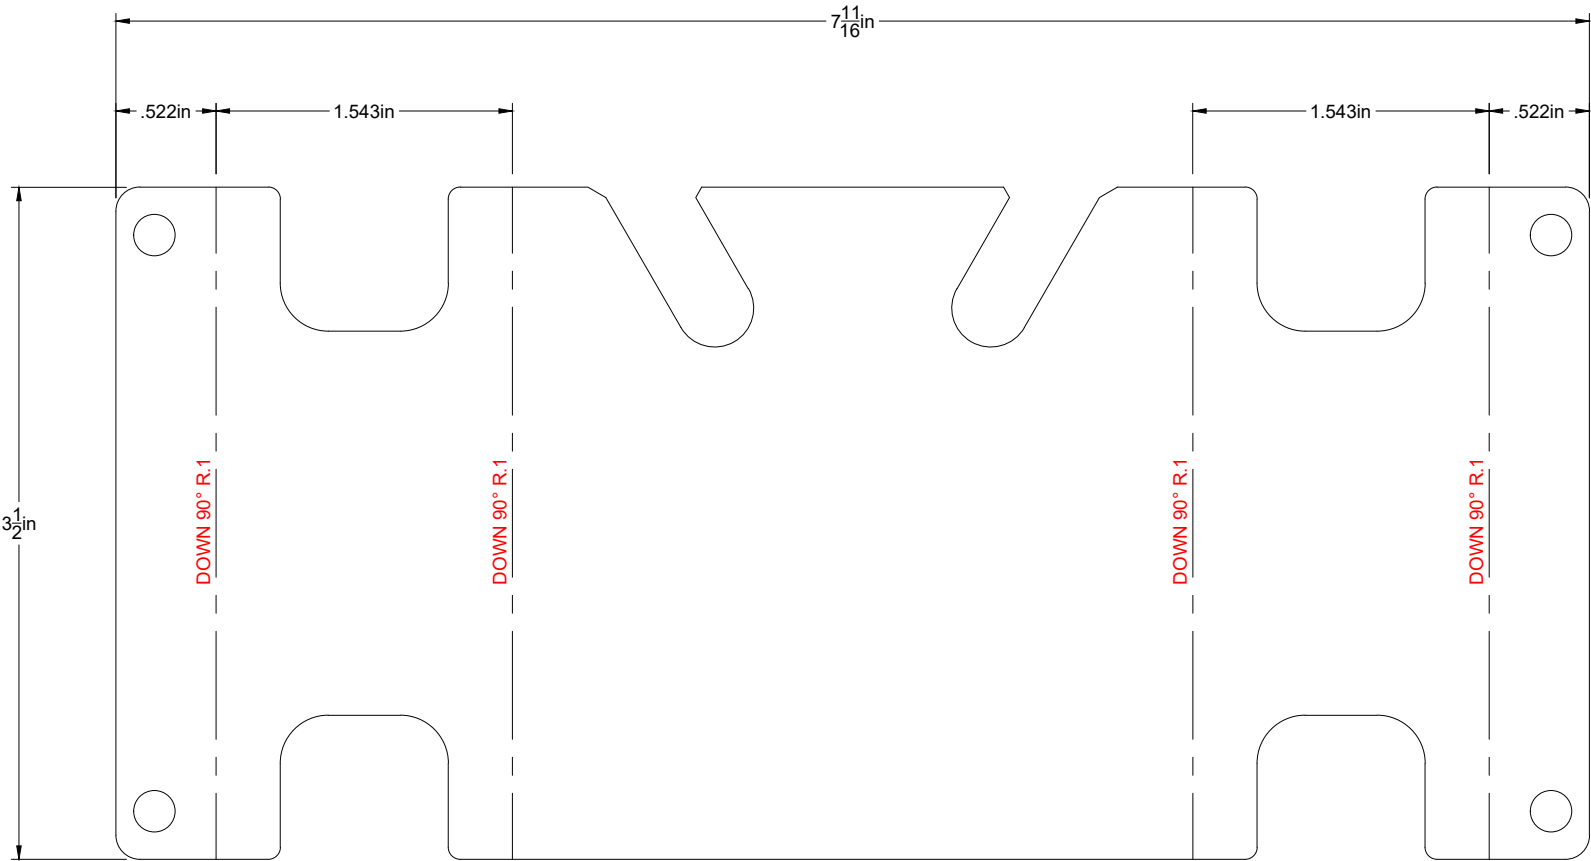

Flat Pattern
BH (x1) .125 Alum Rev.A
Scale = 1:1

PROJECT

TITLE
Single Full Follow-up Lever

Standard Dims & Tolerances:

- All dimensions are in inches [mm], unless otherwise noted.
- Break all sharp edges .010–.030 in Unless otherwise specified.
- Remove burrs and slag.
- Unless otherwise noted, parts to be delivered as-fabricated.
- Remove sharp edges & burrs.
- Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

Weldments

- Welds per AWS D1.1 (unless otherwise specified)
- Fillet weld size $\pm 1/16$ in
- Weld length $\pm 1/8$ in
- Distortion: hold overall dimensions to $\pm 1/16$ in unless otherwise noted

Machining (CNC / Manual)

- Unless noted, ± 0.005 in
- Concentricity ± 0.003 in
- Flatness/parallelism ± 0.003 in per 12 in length
- Surface finish: 125 μ in RMS unless otherwise noted

Linear Dimensions

- 1 place decimal (X.X) ± 0.1 in
- 2 place decimal (X.XX) ± 0.01 in
- 3 place decimal (X.XXX) ± 0.005 in
- Angles $\pm 0.5^\circ$

These drawings are the property of HJM MACHINE. They are not to be used for any purpose without the approval of HJM and are to be returned upon request.

DRAWN BY: Philip Hull

DATE: 4/6/2026

REV A

SHEET

6/7

Single Full Follow-up Lever

PARTS LIST				
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL
8	1	8541K23	Nylon Friction Washer 5/16 ID x 1 in OD	Nylon, Black

Top View

8541K23 - Nylon Friction Washer 5/16 ID x 1 in OD

Scale = 2:1

Right View

8541K23 - Nylon Friction Washer 5/16 ID x 1 in OD

Scale = 2:1

PROJECT

TITLE

Single Full Follow-up Lever

Standard Dims & Tolerances:

- All dimensions are in inches [mm], unless otherwise noted.
- Break all sharp edges .010–.030 in Unless otherwise specified.
- Remove burrs and slag.
- Unless otherwise noted, parts to be delivered as-fabricated.
- Remove sharp edges & burrs.
- Coatings/finishes (paint, anodize, powder coat, plating, etc.) per drawing notes.

Weldments

- Welds per AWS D1.1 (unless otherwise specified)
- Fillet weld size ± 1/16 in
- Weld length ± 1/8 in
- Distortion: hold overall dimensions to ± 1/16 in unless otherwise noted

Machining (CNC / Manual)

- Unless noted, ± 0.005 in
- Concentricity ± 0.003 in
- Flatness/parallelism ± 0.003 in per 12 in length
- Surface finish: 125 µin RMS unless otherwise noted

Linear Dimensions

- 1 place decimal (X.X) ± 0.1 in
- 2 place decimal (X.XX) ± 0.01 in
- 3 place decimal (X.XXX) ± 0.005 in
- Angles ± 0.5°

These drawings are the property of HJM MACHINE. They are not to be used for any purpose without the approval of HJM and are to be returned upon request.

DRAWN BY:

Philip Hull

DATE:

4/6/2026

REV

A

SHEET

7/7