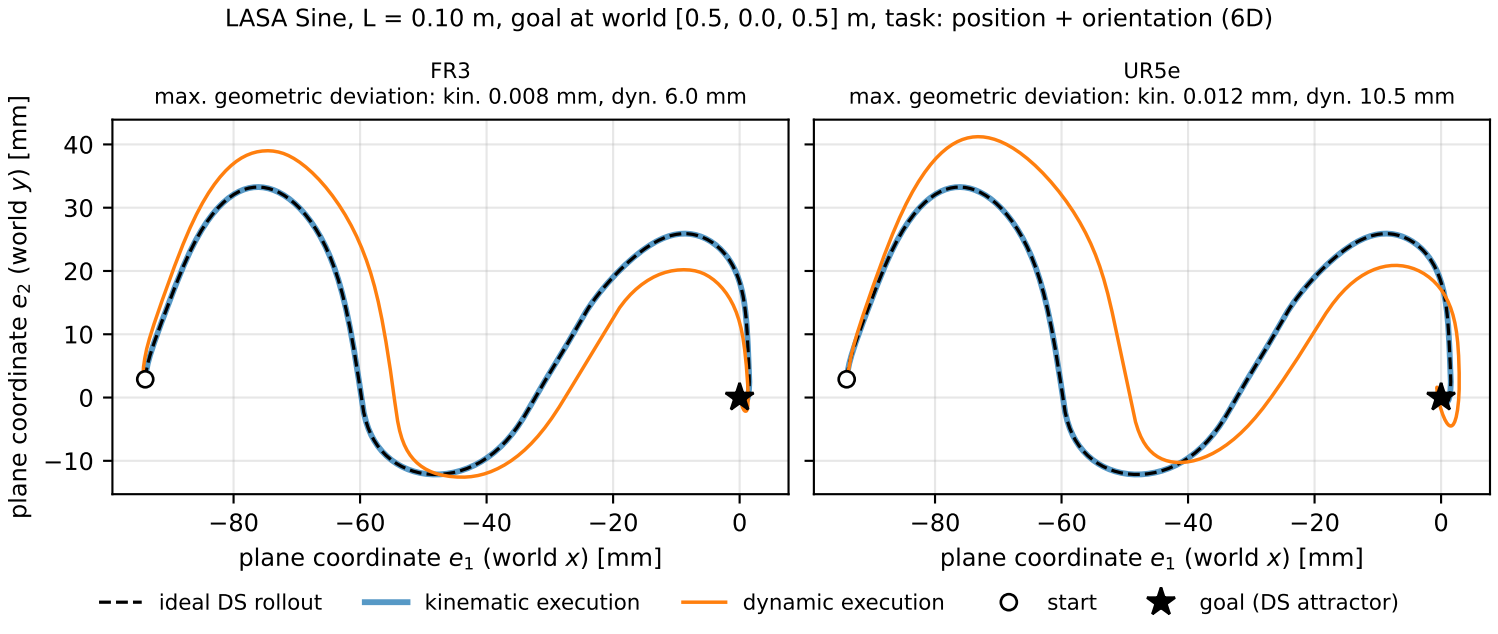
LASA Sine, L = 0.10 m, goal at world [0.5, 0.0, 0.5] m, task: position + orientation (6D)
FR3
max. geometric deviation: kin. 0.008 mm, dyn. 6.0 mm
UR5e
max. geometric deviation: kin. 0.012 mm, dyn. 10.5 mm
plane coordinate e_2 (world y) [mm]
40
30
20
10
0
−10
−80
−60
−40
−20
0
plane coordinate e_1 (world x) [mm]
ideal DS rollout
kinematic execution
dynamic execution
start
goal (DS attractor)