3D_Shapes/Cshape_bottom (3D, model_f.pth), start 0 = (+0.171, -0.443, -0.994), task full6, L = 0.10 m
speed x1, T = 10 s, servo tau FR3 0.10 s, UR5e 0.10 s, null space off, spatial embedding

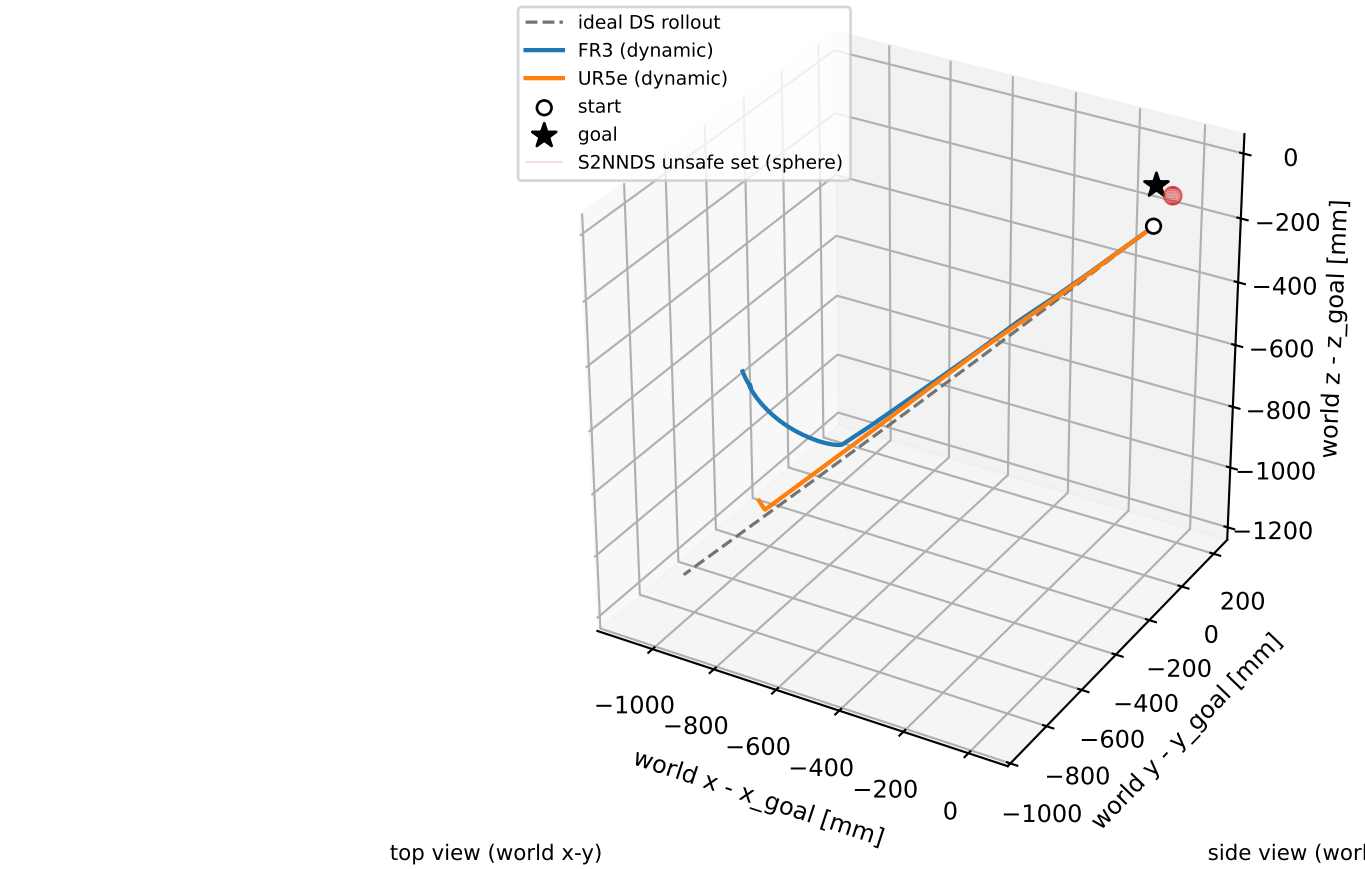

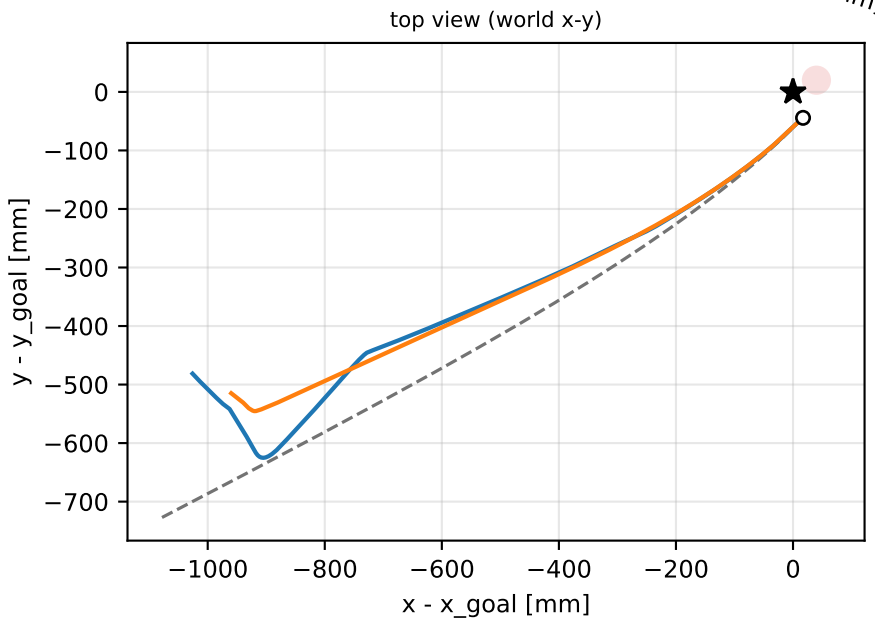

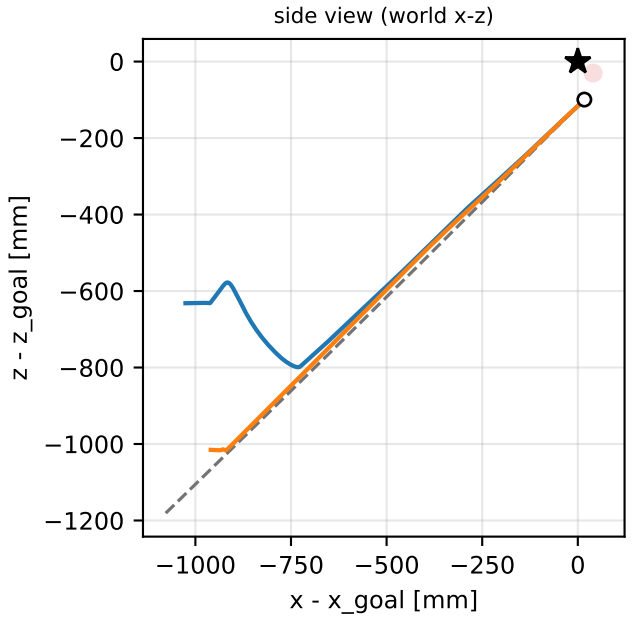

	FR3	UR5e
status	ok	ok
success (final err < 1 % L)	no	no
final goal error [mm]	1.3e+03	1.49e+03
RMSE (time-sync.) [mm]	228	105
max geom. deviation [mm]	366	133
min unsafe clearance [mm]	72.3	72.3
entered unsafe set	no	no
left training domain	yes	yes
peak |qd|/qd_max (measured)	0.911	0.850
peak |tau|/tau_lim (applied)	0.663	0.278
IK vel. scaling [% steps]	1.02	0.72
first limit event	joint position limit j2 t=7.536s; cmd vel. scaling j4 t=7.680s	cmd vel. scaling j3 t=9.022s

FR3 torque ratio vs. documented limits 87/12 Nm (not enforced by the model).
ideal DS rollout does not reach 1 % L within 120 s; T_max = 10 s, success not expected
the IDEAL DS rollout itself leaves the training domain at t = 0.10 s (max |x_n| 11.83): property of the learned model from this x0, not of the robots