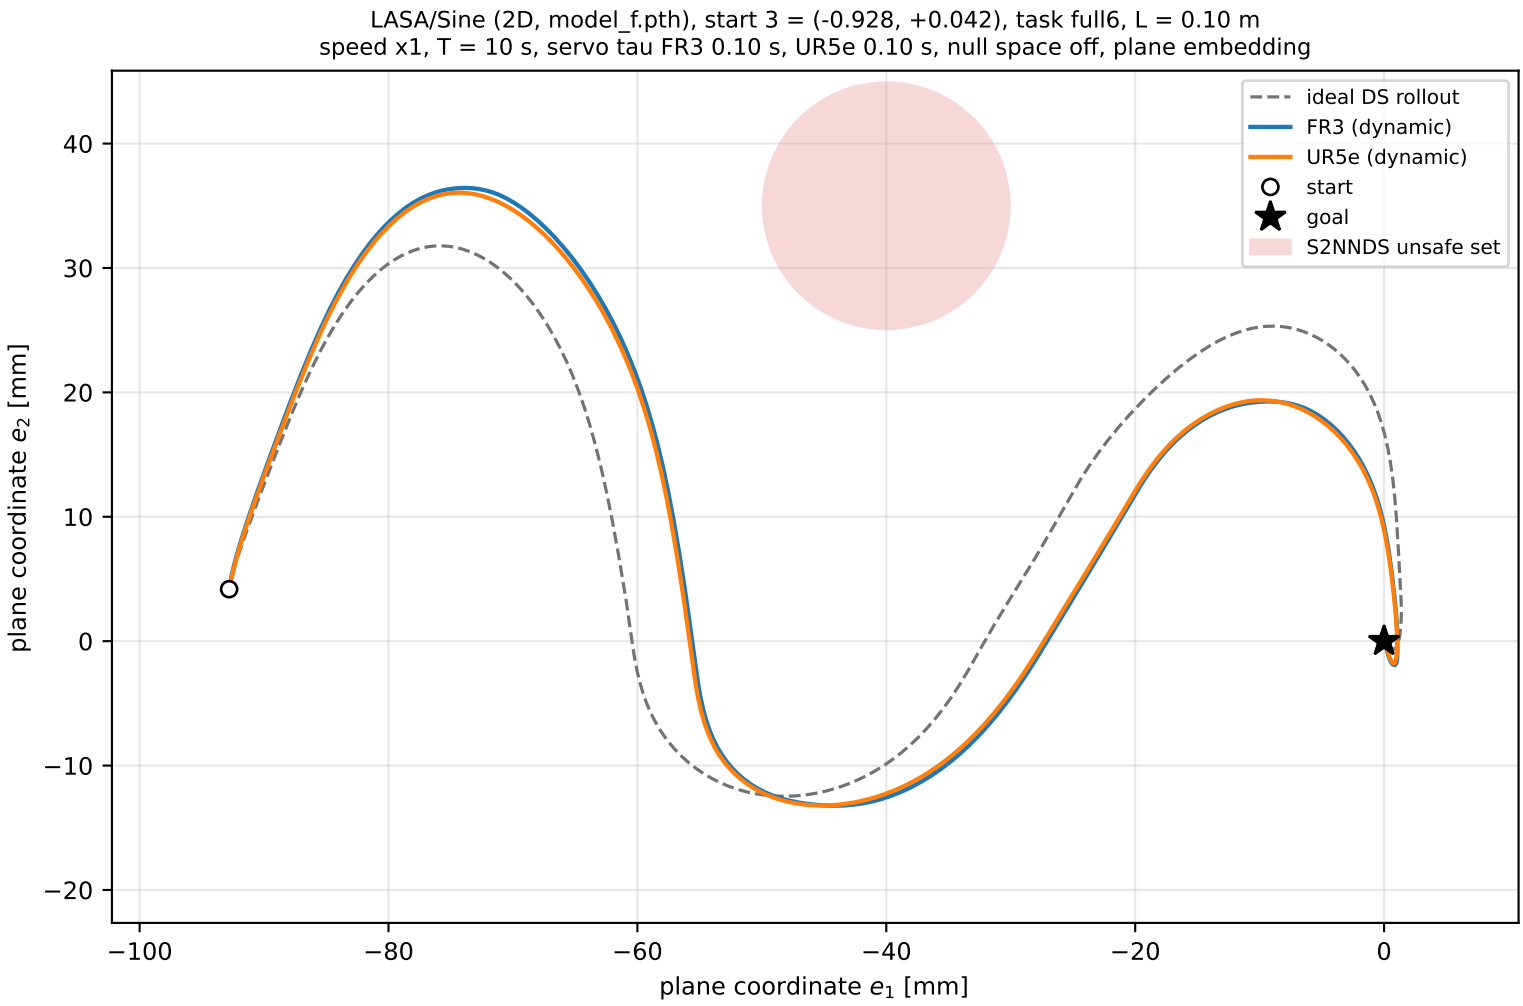

	FR3	UR5e
status	ok	ok
success (final err < 1 % L)	yes	yes
final goal error [mm]	0.00119	7.7e-10
RMSE (time-sync.) [mm]	8.67	7.54
max geom. deviation [mm]	6.06	6.02
min unsafe clearance [mm]	13.8	14.1
entered unsafe set	no	no
left training domain	no	no
peak |qd|/qd_max (measured)	0.040	0.035
peak |tau|/tau_lim (applied)	0.255	0.106
IK vel. scaling [% steps]	0.00	0.00
first limit event	none	none

FR3 torque ratio vs. documented limits 87/12 Nm (not enforced by the model).